

H E R

Collection

A solid brown vertical bar occupies the left third of the image.

HER Collection

HER

HISTORY

Since our beginning, we have become a reference in the creation of technical and architectural lighting solutions. Years of experience and dedication; quality and innovation; are translated into the confidence of architects, designers, professionals and clients.

LIGHTING WITH INNOVATION AND DESIGN

Her lighting is much more than a lighting manufacturer. Our mission is to create innovative lighting experiences that bring comfort and value to projects. Headquartered in Barcelona, our work reflects the dynamic and constantly evolving nature of today's lighting.

CREATING EXPERIENCES

At Her lighting we believe that lighting is an opportunity to enhance spaces and in this way create environments that inspire, promote well-being and boost productivity, thus improving the daily lives of the people who inhabit and live in them. Our passion for light and our constant search for excellence is reflected in our lighting solutions and projects.

HER LAB

At the heart of our factory is Her Lab, our department dedicated to research and development. A team of enthusiastic and passionate engineers, designers and lighting professionals. Her Lab is constantly developing, exploring and researching new technologies; focused on providing innovative lighting solutions.

SHOWROOM

A unique space dedicated to lighting, designed to inspire and offer our customers the opportunity to experience our luminaires and discover the infinite and unique lighting solutions we provide for their projects.

Av. Josep Tarradellas 51-53
08029 Barcelona

COMMITMENT

Our commitment to light is a fundamental principle that guides us; in the process of creating, designing and manufacturing our luminaires; in our collaboration with professionals, architects and designers; and in the promotion of ethical and responsible consumption. At Her Lighting we strive to create functional and timeless designs that enrich lives and spaces.

HISTORIA

Desde nuestro comienzo, nos hemos convertido en un referente en la creación de soluciones técnicas y arquitectónicas de iluminación. Años de experiencia y dedicación; calidad e innovación; se traducen en confianza de arquitectos, diseñadores, profesionales y clientes.

ILUMINANDO CON INNOVACIÓN Y DISEÑO

Her lighting es mucho más que un fabricante de iluminación. Nuestro objetivo es crear experiencias lumínicas innovadoras, que aporten confort y valor a los proyectos. Ubicados en Barcelona, nuestro hacer refleja la naturaleza dinámica y en constante evolución de la iluminación actual.

CREANDO EXPERIENCIAS

En Her lighting creemos que la iluminación es una oportunidad para enriquecer los espacios y de esta manera crear entornos que inspiren, promuevan el bienestar, impulsen la productividad, mejorando de esta manera el día a día de las personas que lo habitan y lo viven. Nuestra pasión por la luz y nuestra constante búsqueda de la excelencia, se refleja en nuestras soluciones y proyectos de iluminación.

HER LAB

En el corazón de nuestra fábrica se encuentra Her Lab, nuestro departamento dedicado a la investigación y el desarrollo. Un equipo formado por ingenieros, diseñadores y profesionales de la iluminación, entusiastas y apasionados. Her Lab está en constante desarrollo, explorando e investigando nuevas tecnologías; enfocados en brindar soluciones lumínicas innovadoras.

SHOWROOM

Un espacio único dedicado a la iluminación, pensado para inspirar y ofrecer a nuestros clientes la oportunidad de experimentar nuestras luminarias y descubrir las infinitas y singulares soluciones lumínicas que aportamos para sus proyectos.

Av. Josep Tarradellas 51-53
08029 Barcelona

COMPROMISO

Nuestro compromiso con luz es un principio fundamental que nos guía; en el proceso de creación, diseño y fabricación de nuestras luminarias; en nuestra colaboración con profesionales, arquitectos y diseñadores; y en la promoción del consumo ético y responsable. En Her Lighting nos esforzamos por crear diseños funcionales y atemporales que enriquezcan vidas y espacios.



Fredrik Eng

After working more than 20 years with project specific architectural lighting, the need for new bespoke solutions is there all the time. When we team up with architects to create light concepts it is crucial to be able to work with an unlimited toolbox.

The product is just a mean to achieve the best result in a project.

Sometimes it is to match the right color or material, having the right lens for the right effect, or be able to control it in a specific way. Other times it demands a total new design. HER lighting with its R&D department has helped us realize many projects throughout the last 10 years. The PM collection was born out of a need for a visually clean and flexible front ring that could hold and hide the technical light engine.

Out of this idea a whole series of fixtures was designed.

eng

Después de trabajar más de 20 años con iluminación arquitectónica específica para proyectos, la necesidad de nuevas soluciones continúa siendo una necesidad. Cuando colaboramos con arquitectos para crear conceptos de iluminación, es fundamental poder trabajar con una caja de herramientas ilimitada. El producto es solo un medio para lograr el mejor resultado en un proyecto.

A veces se trata de acertar el color o el material, tener la lente adecuada para el efecto deseado o poder controlar la luz de una manera específica. Otras veces, se requiere un diseño totalmente nuevo. HER Lighting, con su departamento de I+D, nos ha ayudado a realizar muchos proyectos a lo largo de los últimos 10 años. La colección PM nació de la necesidad de un aro frontal visualmente limpio y flexible que pudiera contener y ocultar el conjunto técnico de iluminación. A partir de este concepto diseñamos toda una serie de luminarias.



Bruno de Avila

Bruno de Avila is an award-winning product designer with over 15 years experience in the lighting world. Now he focuses on special projects for HER Lighting with his innovative approach to design. Based in Barcelona, the Brazilian designer combines artistry with innovation to transform concepts into captivating lighting.

He designed his first award-winning lamp while studying for his bachelor's degree in design, marking the beginning of a distinguished career. Using advanced 3D printing and CNC milling techniques, he ensures precision and functionality in each creation. Bruno combines design methodology, craftsmanship and high technology, always searching for more sustainable solutions.

B. Avila

Bruno de Avila es un galardonado diseñador de producto con más de 15 años de experiencia en el mundo de la iluminación. Ahora está centrado en proyectos especiales para HER Lighting con su innovador enfoque del diseño. Afincado en Barcelona, el diseñador brasileño combina el arte con la innovación para transformar conceptos en una iluminación fascinante.

Diseñó su primera luminaria premiada mientras estudiaba su licenciatura en diseño, lo que marcó el comienzo de su distinguida carrera. Utilizando técnicas avanzadas de impresión 3D y fresado CNC, garantiza precisión y funcionalidad en cada creación. Bruno combina metodología de diseño, artesanía y alta tecnología, buscando siempre soluciones más sostenibles.

HER team


At Her Lighting we have an extraordinary team of professionals; multidisciplinary and years of experience, focused on designing and producing luminaires that bring beauty and personality to environments through light.

Thanks to our wide experience and high level of specialization, we can develop unique solutions adapted to each project and client. Our products, through their design and careful lighting, complete and enhance both indoor and outdoor spaces.

En Her Lighting contamos con extraordinario equipo de profesionales; multidisciplinar y con años de experiencia, enfocados en diseñar y fabricar luminarias que aporten belleza y personalidad a los ambientes a través de la luz.

Gracias a nuestra amplia experiencia y alto nivel de especialización, podemos desarrollar soluciones únicas adaptadas a cada proyecto y cliente. Nuestros productos, a través de su diseño y cuidada luz, completan y realzan los espacios tanto interiores como exteriores.



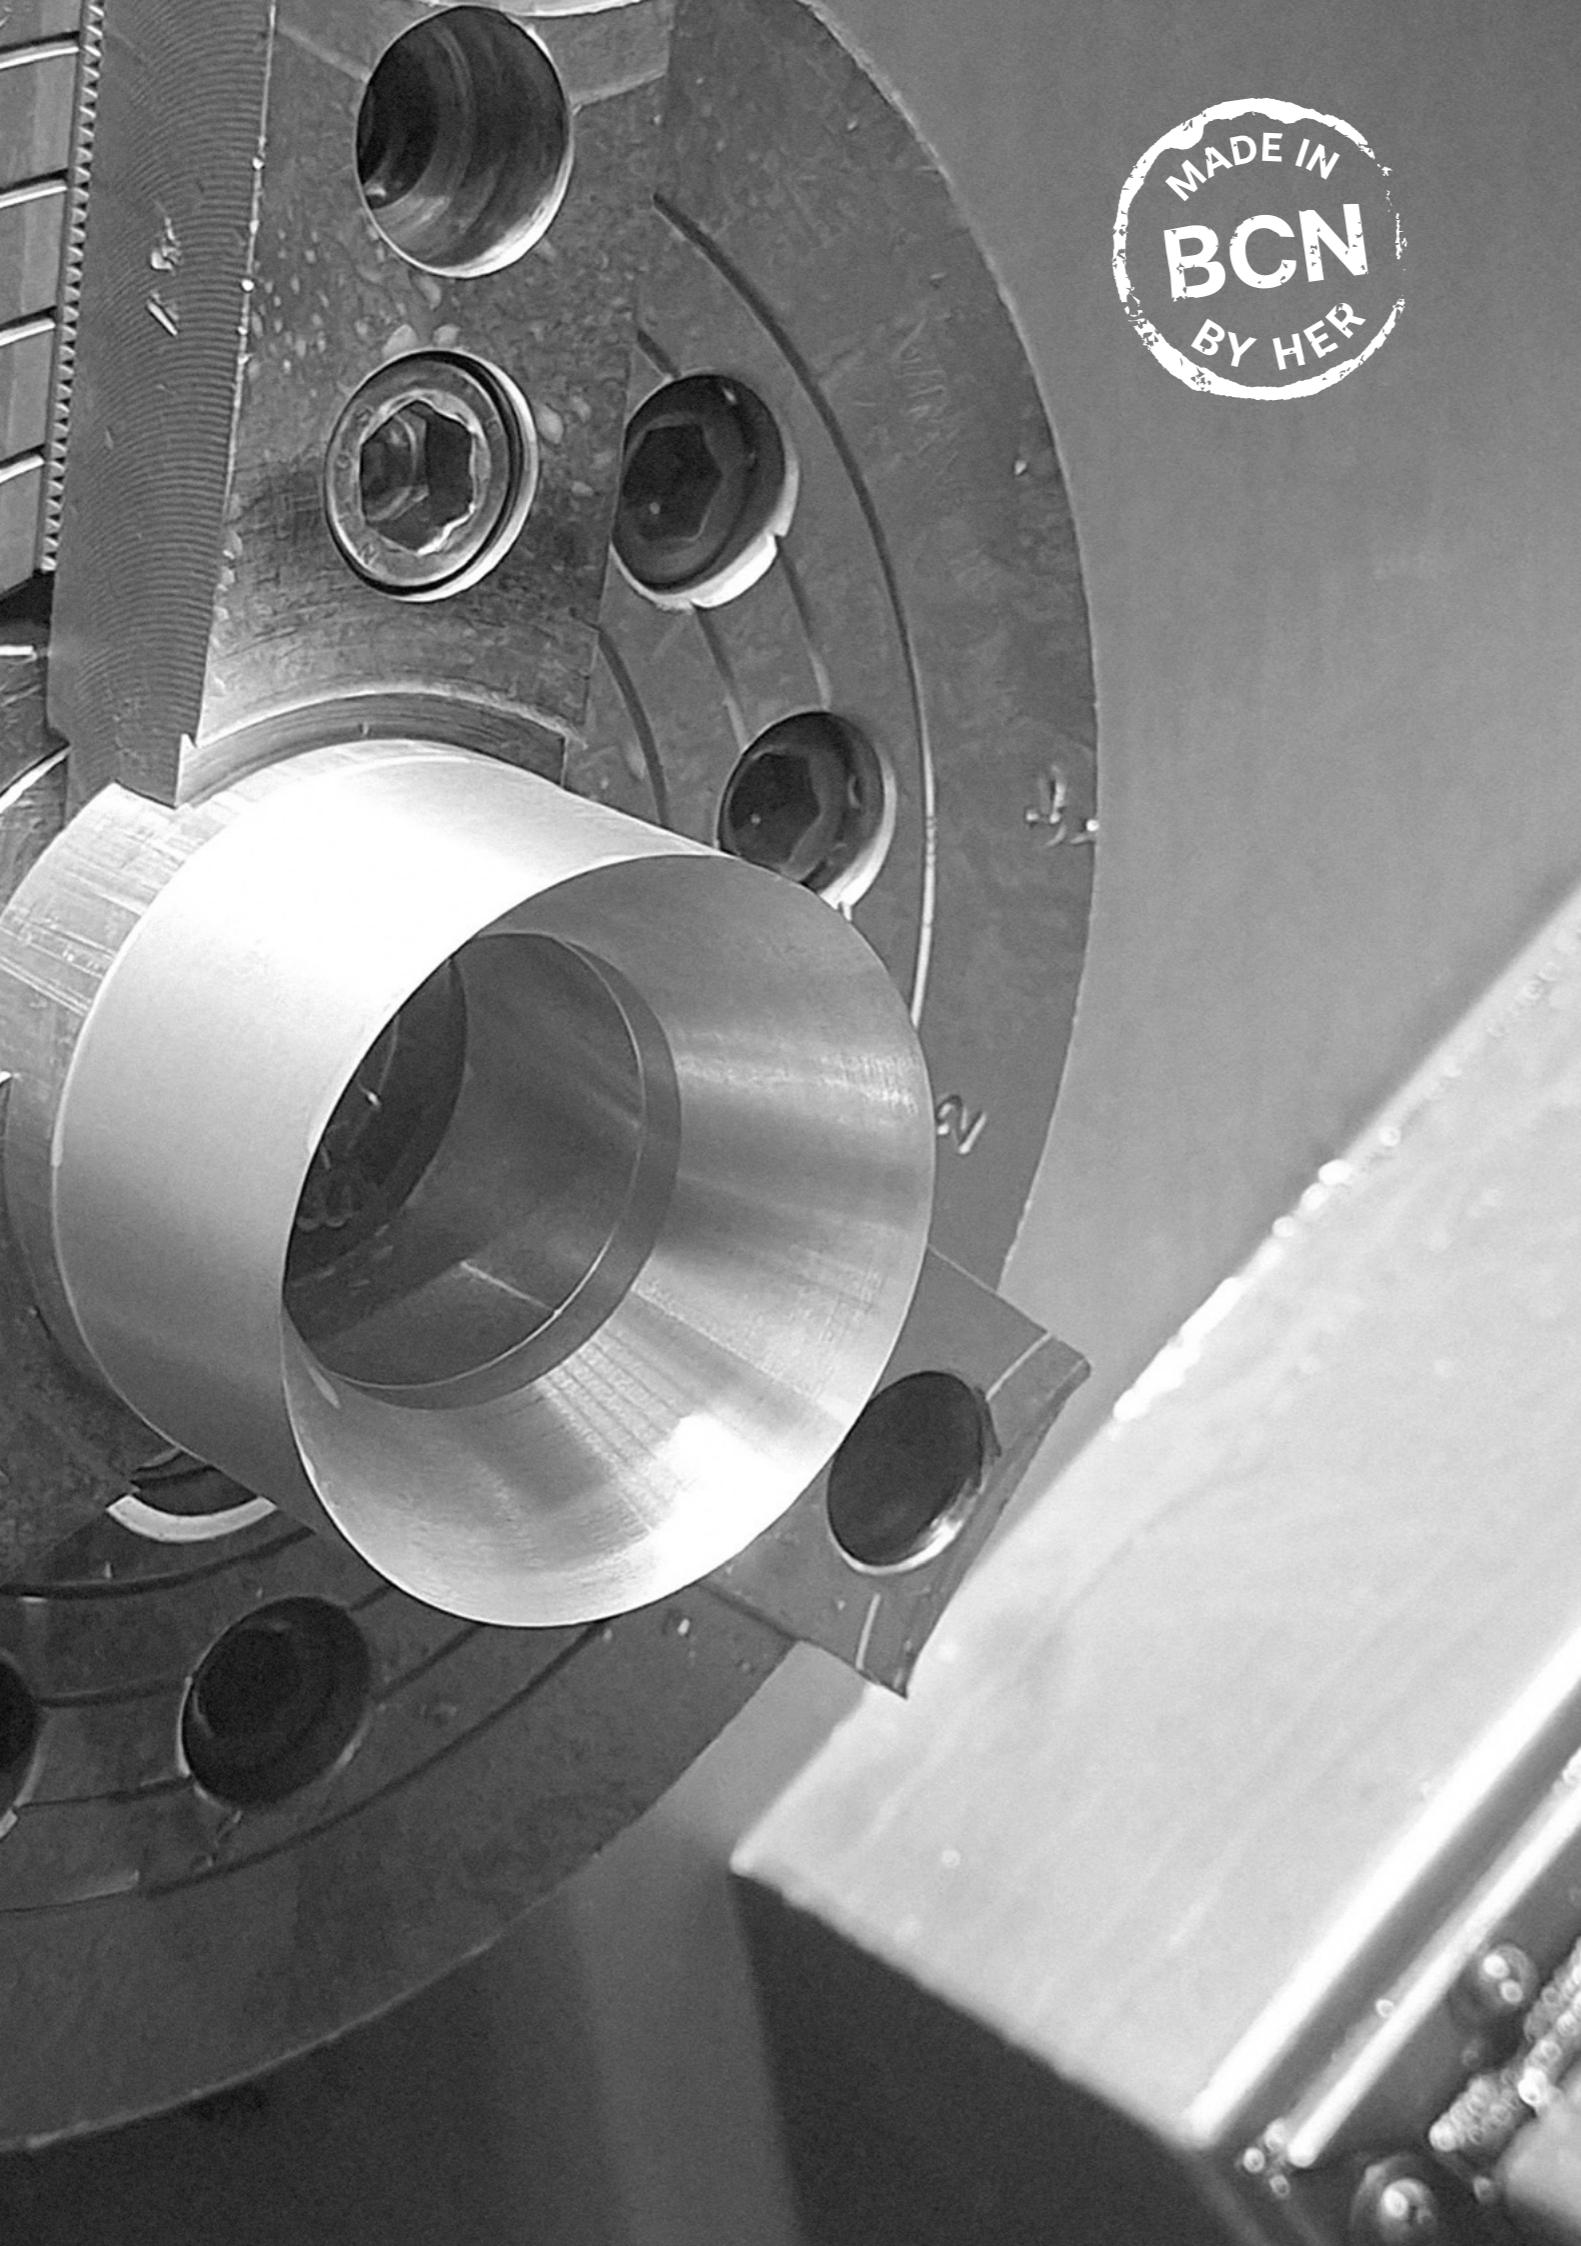


made BARCELONA

Made in Barcelona, our lighting products are manufactured using local suppliers for all milling, moulding and finishing processes. Each product is meticulously assembled in-house, ensuring the highest quality and supporting local craftsmanship.

Fabricadas en Barcelona, nuestras luminarias se elaboran en talleres locales para todos los procesos de fresado, moldeado y acabado. Cada producto se ensambla meticulosamente en nuestras instalaciones, lo que garantiza la máxima calidad y apoya la industria artesana local.






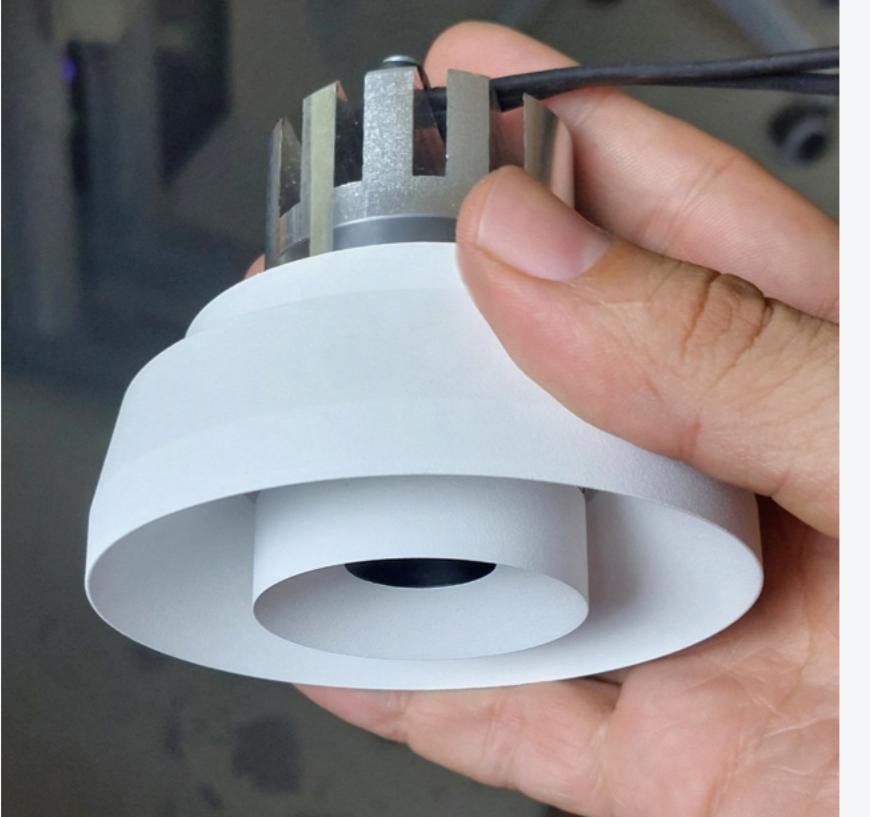


engineering in BARCELONA

Our engineering department specialises in advanced lighting projects, carrying out prototypes and precise laboratory tests, as well as detailed thermal and optical simulations using sophisticated software to ensure superior performance and innovation.

Nuestro departamento de ingeniería se especializa en proyectos de iluminación complejos, realizando prototipos precisos y pruebas de laboratorio, así como simulaciones térmicas y ópticas detalladas utilizando software sofisticado para garantizar un rendimiento e innovación superiores.

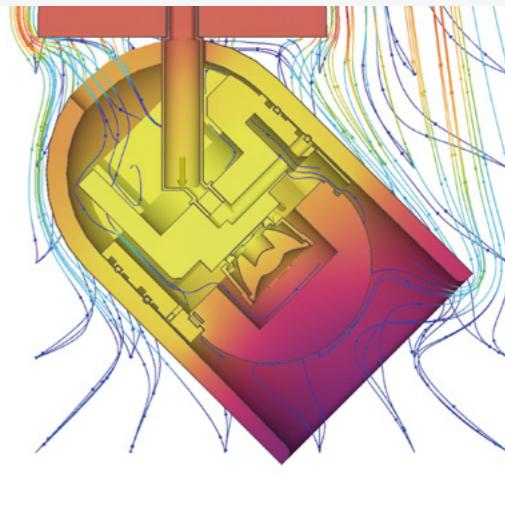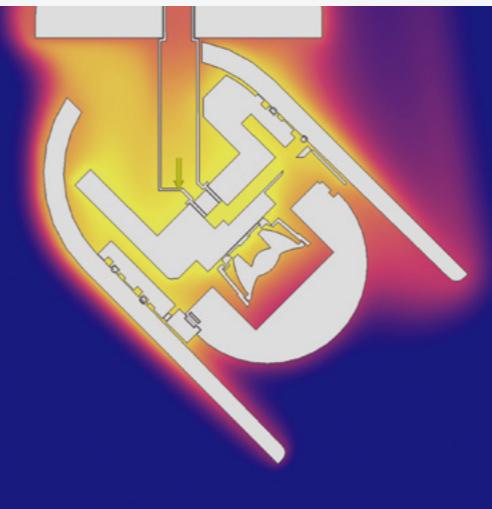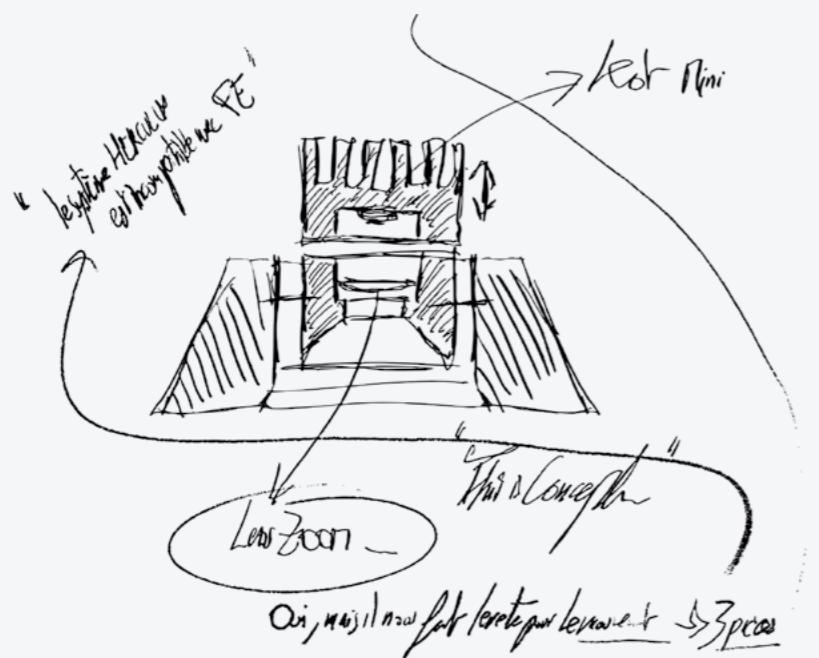

Project development

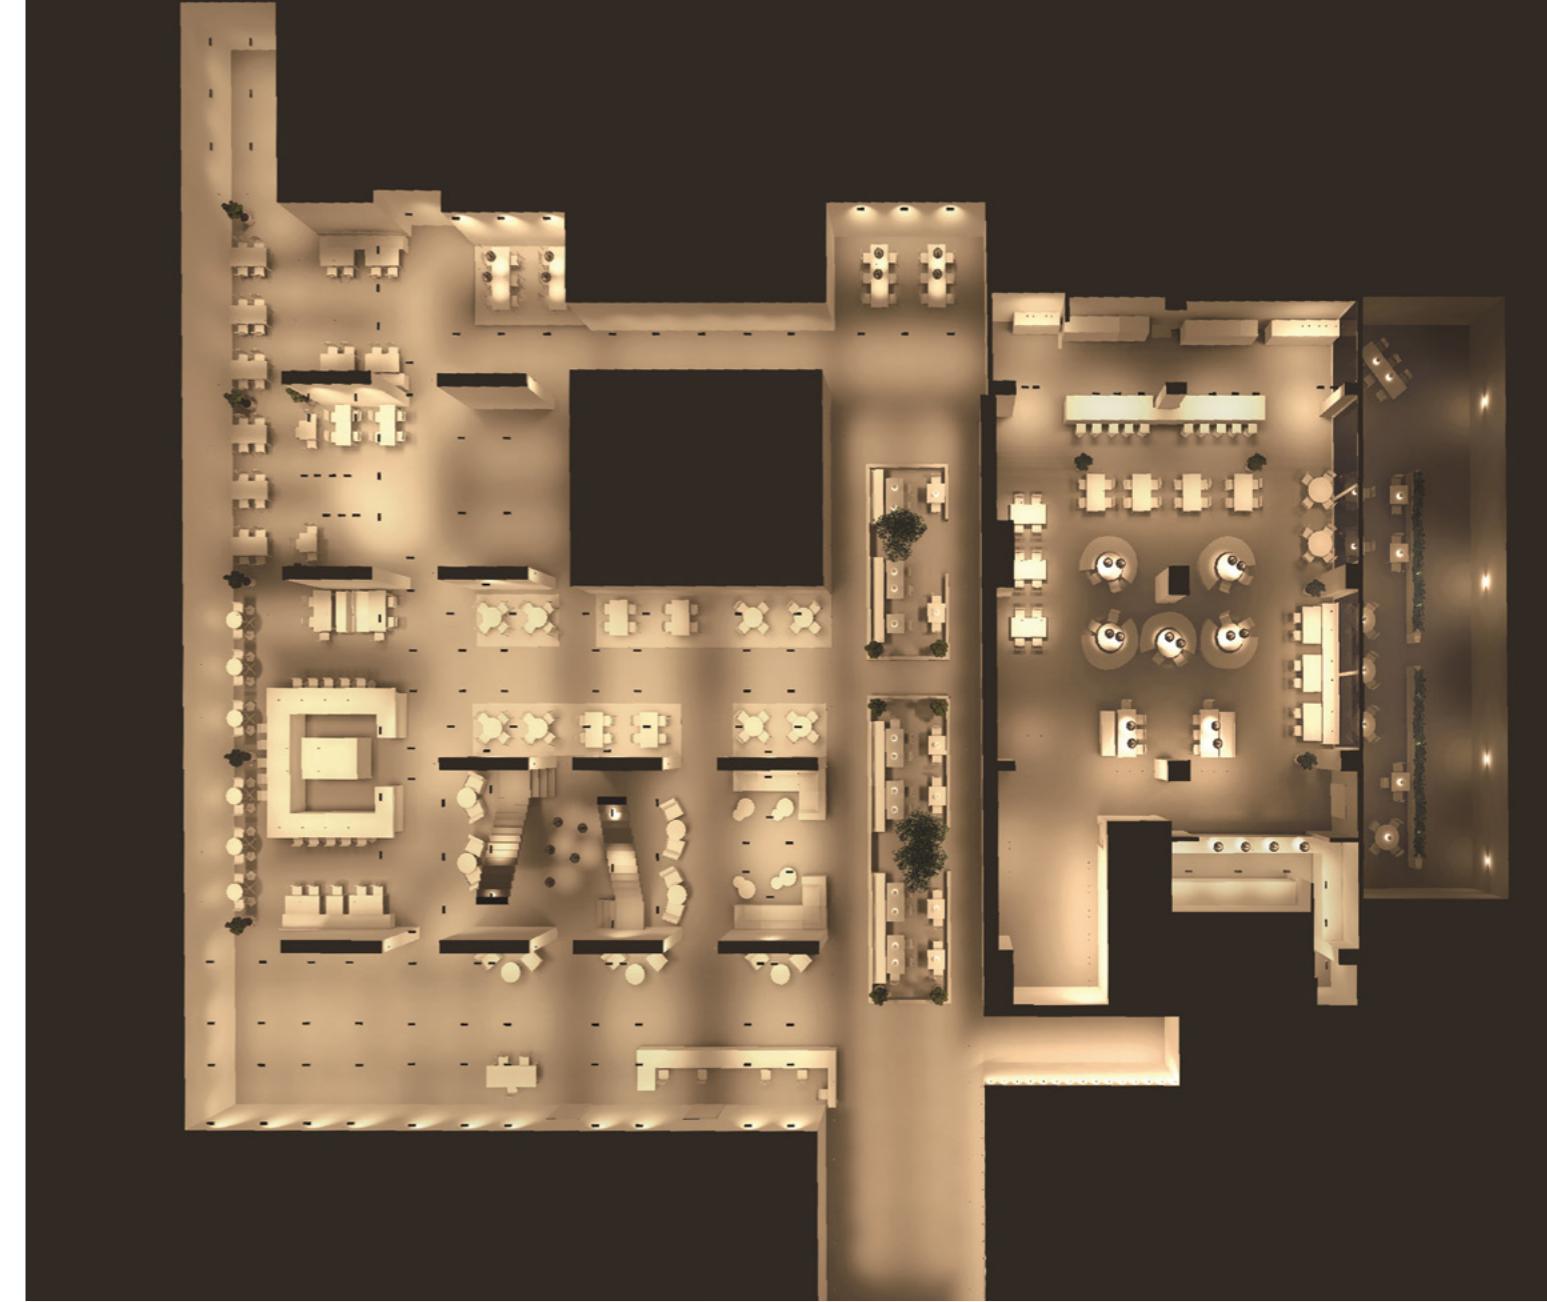

Our project department is made up of a group of multicultural, young, dynamic and flexible professionals who approach lighting projects with enthusiasm and energy. We tackle each project in each of its phases: conceptual, planning, execution and start-up. We analyse and propose the most suitable lighting solutions, taking into account technical, aesthetic and architectural aspects to ensure the final success of the project.


Nuestro departamento de proyectos está formado por conjunto de profesionales multicultural, joven, dinámico y flexible, que afronta los proyectos de iluminación con ilusión y energía. Abordamos cada proyecto en cada una de sus fases; conceptual, planificación, ejecución y puesta en marcha. Analizamos y proponemos las soluciones lumínicas más adecuadas, teniendo en cuenta tanto los aspectos técnicos como estéticos y arquitectónicos, para asegurar de este modo el éxito final de la obra.

NCS colors




In our search for differentiation and harmony with the space, we have included the possibility of customising our Her Collection luminaires with colours from the NCS colour palette. Thus adding a detail of integration and beauty to the lighting project.

En nuestra búsqueda de diferenciación y armonía con el espacio, hemos incluido la posibilidad de personalizar nuestras luminarias Her Collection con colores de la carta NCS. Aportando así un detalle de integración y belleza al proyecto de iluminación.



Metallic finishes

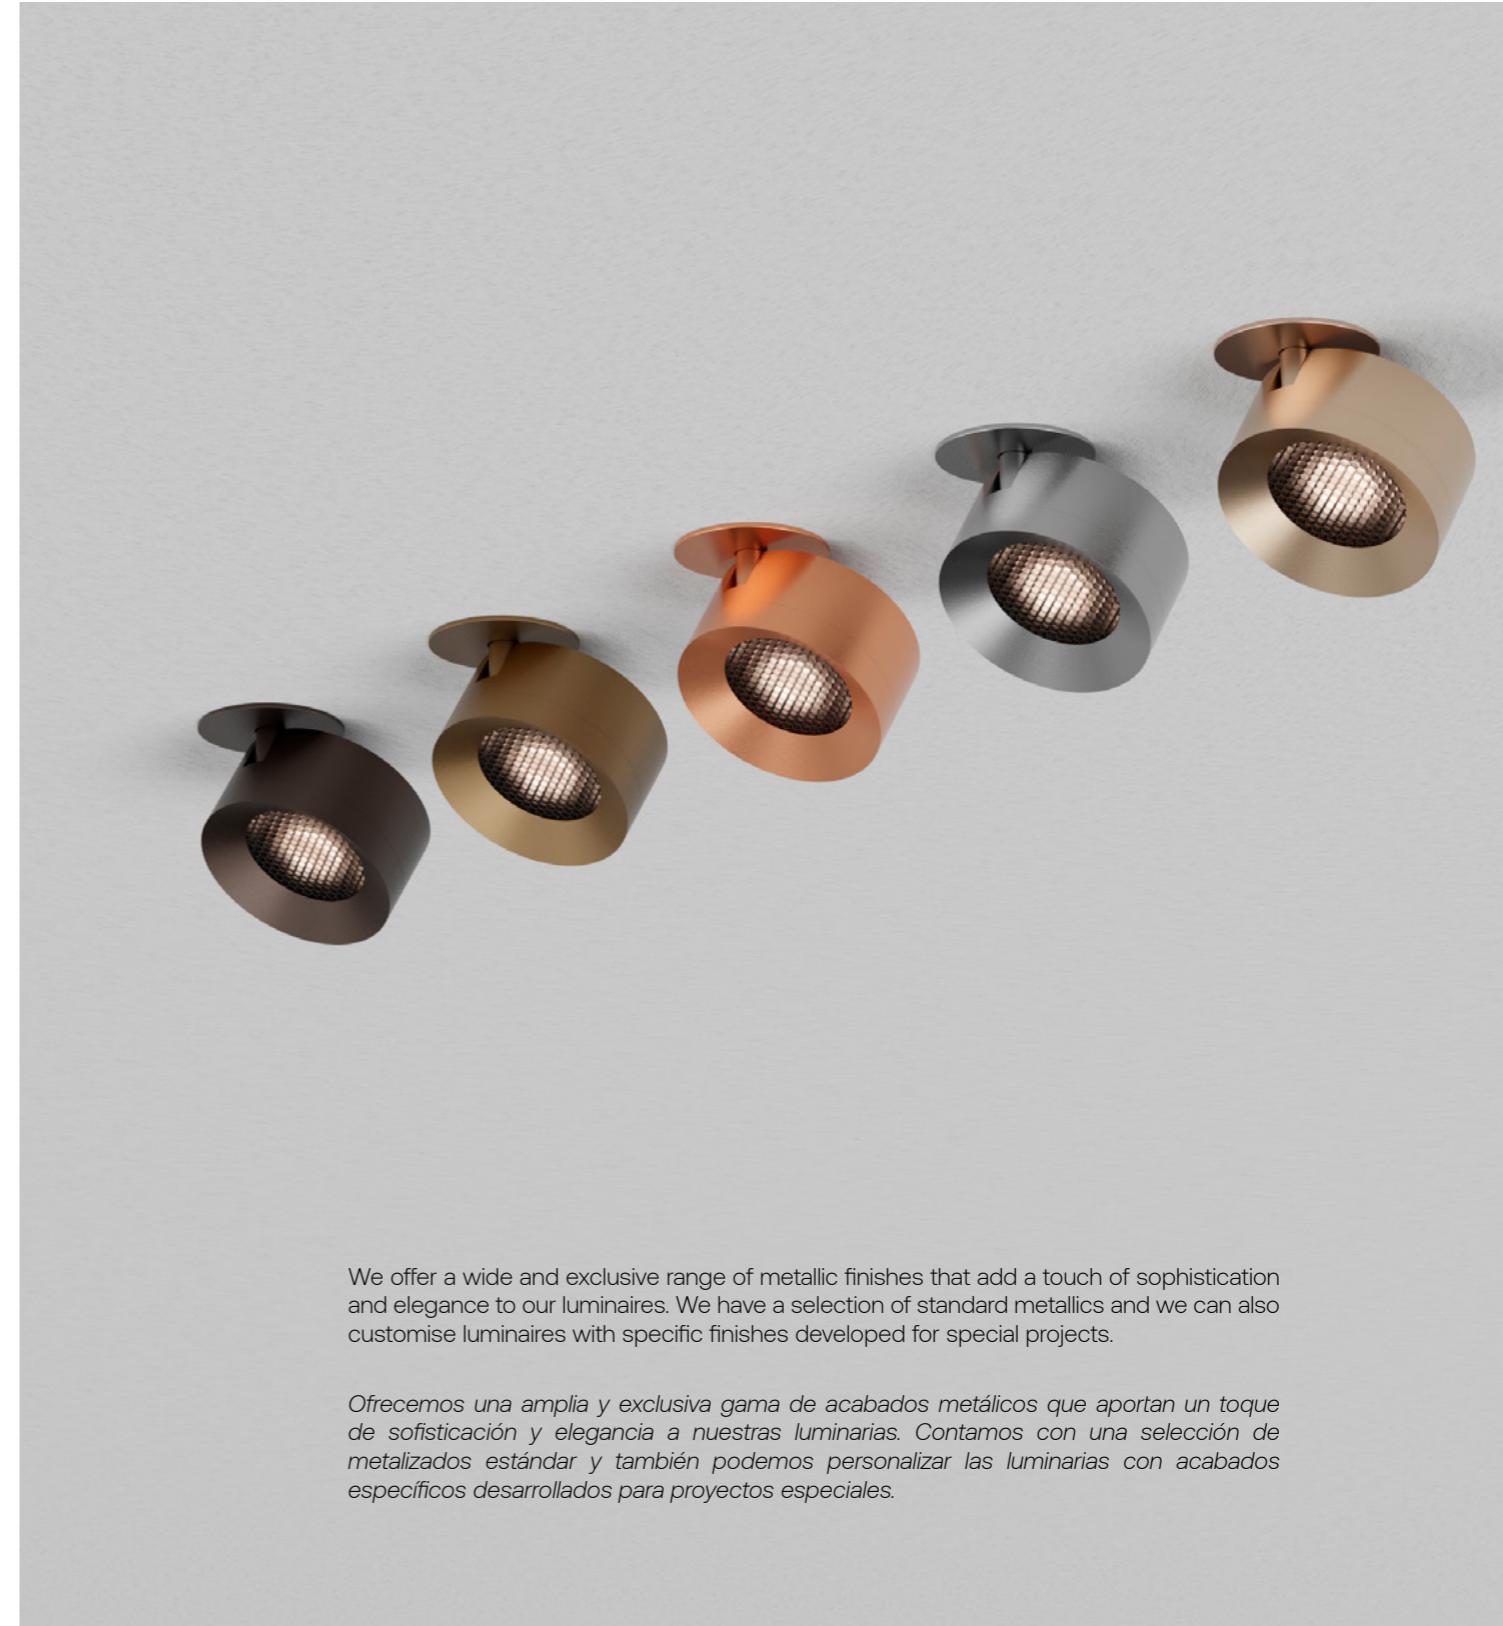


We offer a wide and exclusive range of metallic finishes that add a touch of sophistication and elegance to our luminaires. We have a selection of standard metallics and we can also customise luminaires with specific finishes developed for special projects.


Ofrecemos una amplia y exclusiva gama de acabados metálicos que aportan un toque de sofisticación y elegancia a nuestras luminarias. Contamos con una selección de metalizados estándar y también podemos personalizar las luminarias con acabados específicos desarrollados para proyectos especiales.



cod. DM



cod. DN



cod. DF



cod. DS



cod. DG

PM 25_in spot
p. 28

PM 25_on slim
p. 32

PM 25_on dot
p. 36

PM 25_trk mag
p. 40

PM 46_in dl zoom
p. 66

PM 29-250_p on
p. 42

PM 29-500_p on
p. 46

PM 33_in dl
p. 50

PM 33_in dl+
p. 52

PM 33_in spot
p. 56

PM 37-250_p on
p. 60

PM 55_in dl
p. 72

PM 55_in dl-
p. 76

PM 55_in dl+
p. 78

PM 55_in dl+ tl
p. 82

PM 37-500_p on
p. 64

PM 55+_trk mag
p. 98

PM 55+_trk 230V
p. 100

PM 70_in spot
p. 104

PM 70_on fix
p. 108

PM 70_on slim
p. 112

PM 70_p on
p. 116

HALO 40_in fix
p. 148

HALO 73_in fix
p. 152

PM 111_in spot
p. 122

PM 111_on fix
p. 126

PM 111_on mov
p. 130

PM 111_p on
p. 134

NIO_in 3x1
p. 158

NIO_in 2x2
p. 160

NIO_in 5x1
p. 162

NIO_in 3x3
p. 164

PM 111_trk mag
p. 138

PM 111_trk 230V
p. 142

NIO_on 2x2
p. 168

NIO_on 3x3
p. 170

Nit Down Pendant	Nit UpDown Pend.	Nit Down Surface	Nit Down Trimless	LIV_baliza	PM 111_baliza	PM 25_on slim ip	PM 25_in spot ip
p. 188	p. 192	p. 194	p. 198	p. 222	p. 226	p. 230	p. 234

Nit Down Wall	Nit UpDown Wall	Nixeven Pendant	Nixeven Surface	PM 111_on fix ip
p. 204	p. 206	p. 208	p. 214	p. 236

Nixeven Trimless
p. 218

PM 60_on fix gu10	PL 80_in fix e27	Nik	DOT_trk mag
p. 172	p. 176	p. 180	p. 184

PM 25

by eng



Recessed

in spot p. 28

Surface

on slim p. 32 on dot p. 36

Magnetic

trk mag p. 40

Pendant

29-250_p on p. 42 29-500_p on p. 46

Outdoor

on slim ip p. 230 in spot ip p. 234

Elegant, sober and discreet, our PM 25 models offer a minimalist look without renouncing to the highest lighting performance.


Elegantes, sobrios y discretos, nuestros modelos PM 25 ofrecen un look minimalista sin renunciar a las más altas prestaciones lumínicas.



PM 25_in spot



PM 25_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico



- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
2115.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
2115.92700439x	4,8W	39°	90	2700K	350Lm	73Lm/W
2115.93000414x	4,8W	14°	90	3000K	350Lm	73Lm/W
2115.93000439x	4,8W	39°	90	3000K	350Lm	73Lm/W

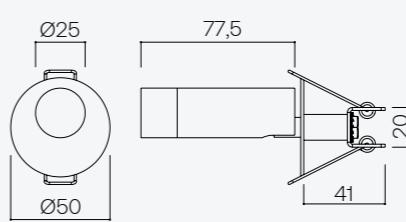

PM 25_on slim



PM 25_on slim



Luminary

Luminária
 • L70 > 50000h
 • MacAdam 3

LED/Optic Óptica

• HP LED CREE
 • Lens

Driver

• Integrated - *Integrado*

Voltage Voltaje

• 220-240VAC

Dimming Regulación

• ON-OFF

Protection Protección

• IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
2244.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
2244.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
2444.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
2244.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

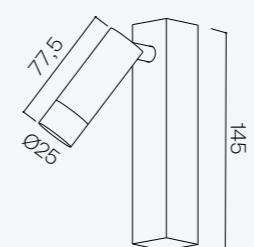


PM 25_on dot

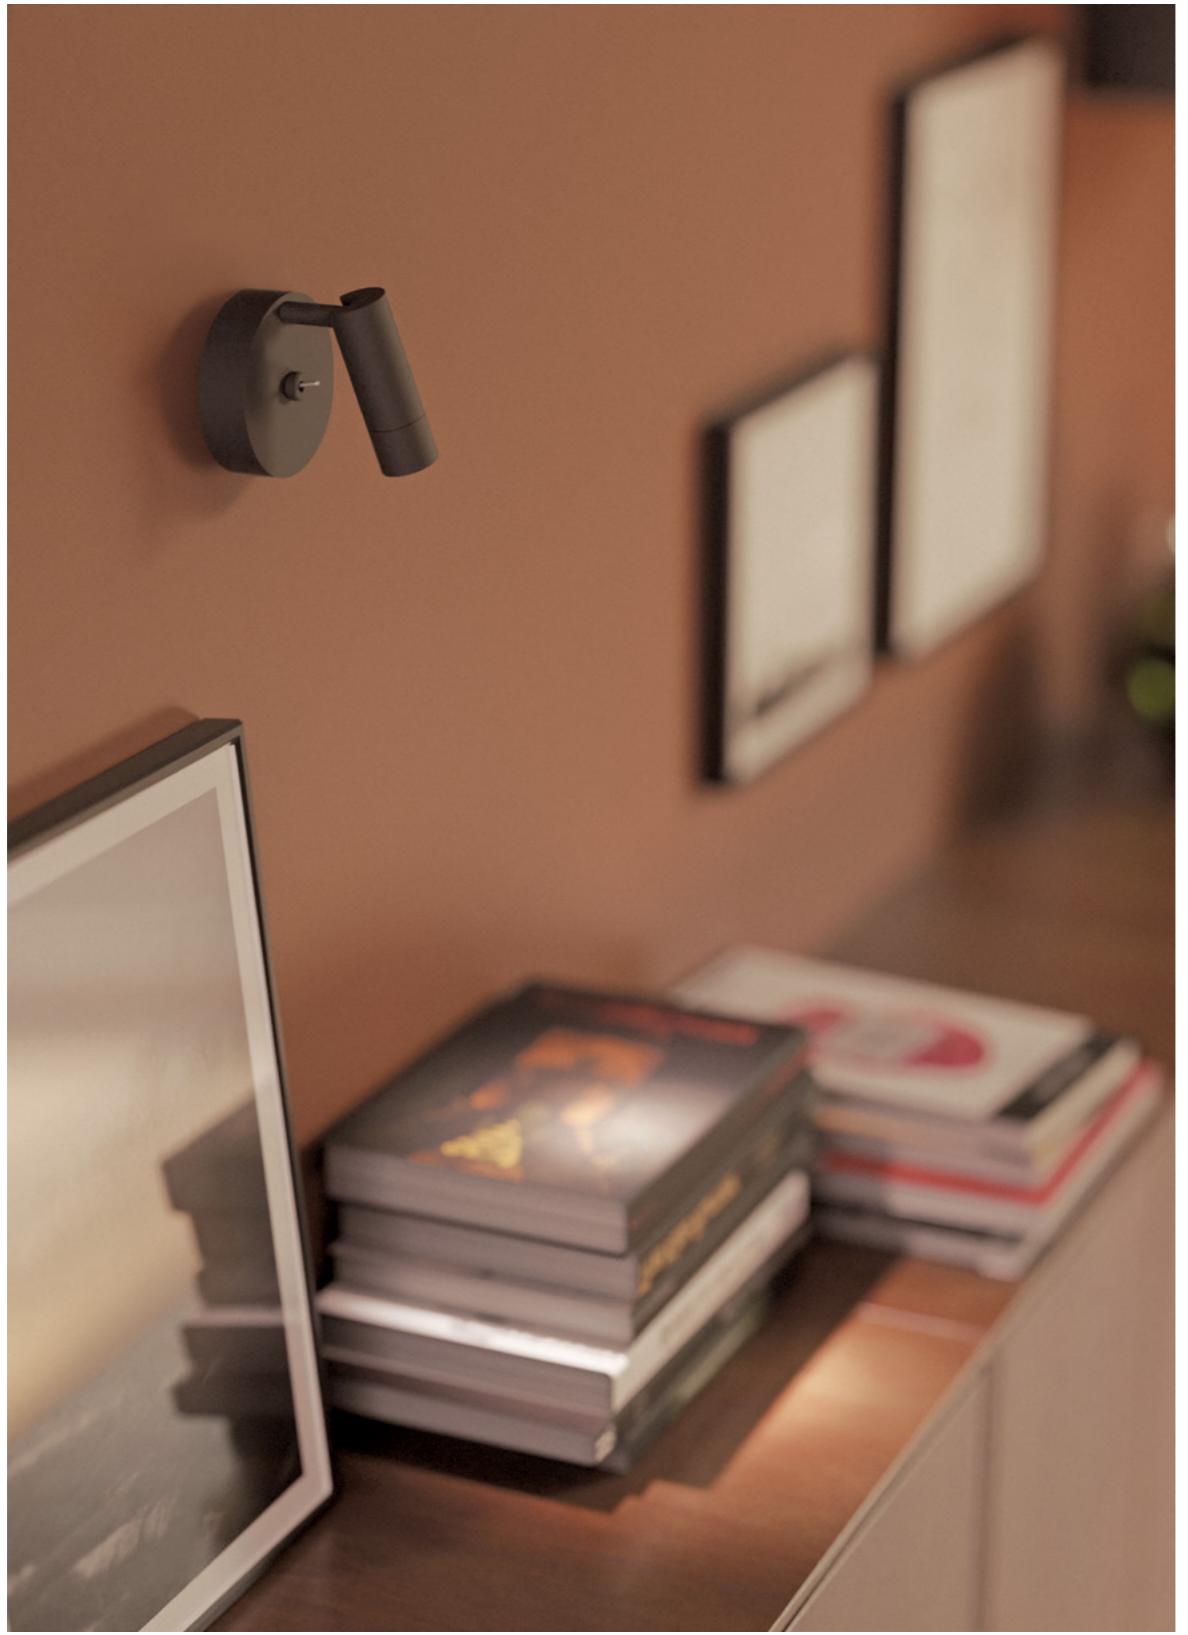

36 — Surface



PM 25_on dot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
2208.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
2208.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
2208.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
2208.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

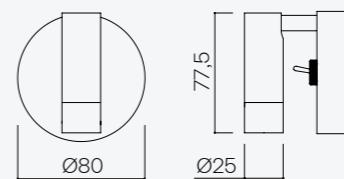

PM 25_trk mag



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS


- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Profile Carril

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
6020.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
6020.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
6020.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
6020.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

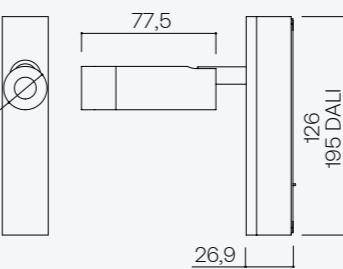


PM 29_p on



42 — Pendant



PM 29-250_p on

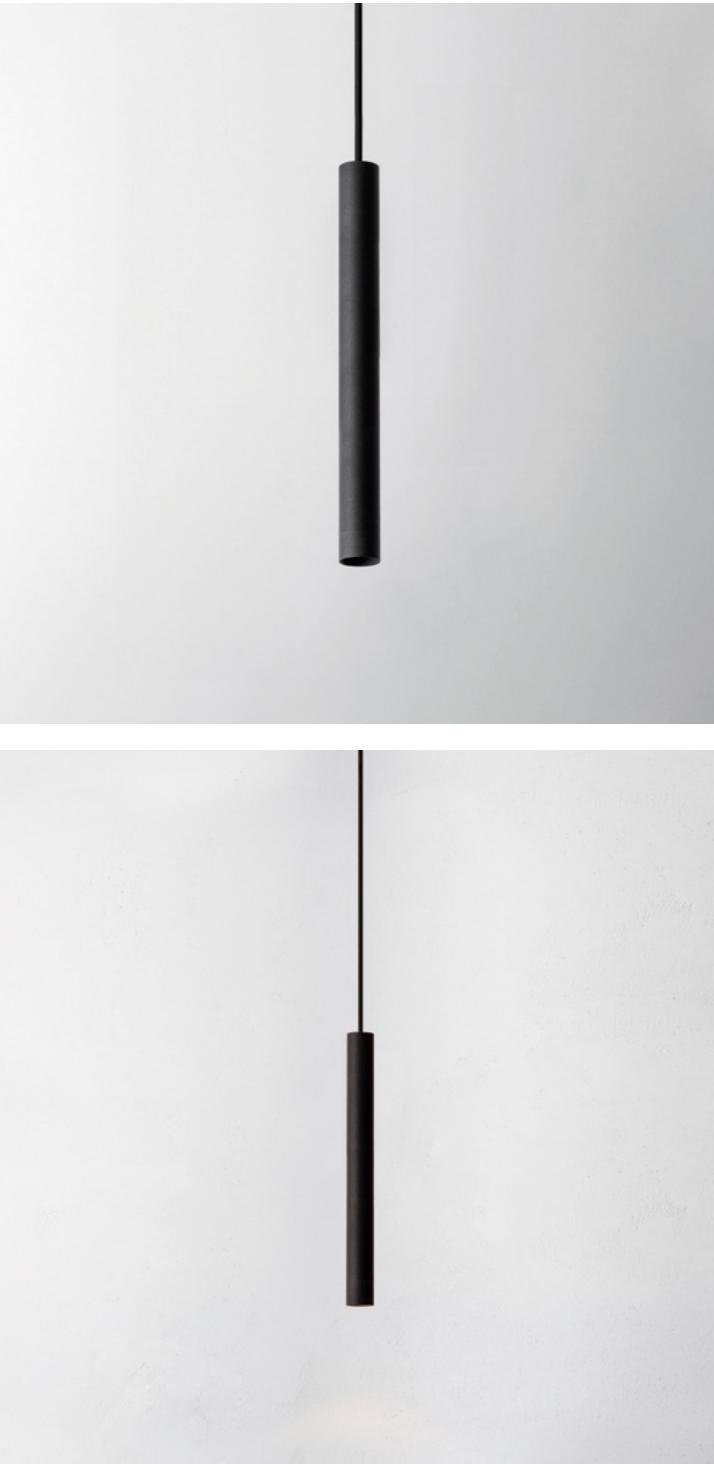

Luminary

- L70 > 50000h
- MacAdam 3
- UGR <19

Cod.

	W	Beam angle	CRI	K	Lm	Efficience
8225.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
8225.92700439x	4,8W	39°	90	2700K	350Lm	73Lm/W
8225.93000414x	4,8W	14°	90	3000K	350Lm	73Lm/W
8225.93000439x	4,8W	39°	90	3000K	350Lm	73Lm/W

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R




Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava



Downloads Descargas



Ask for recessed base.
Base de empotrar, consultar.

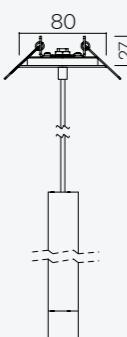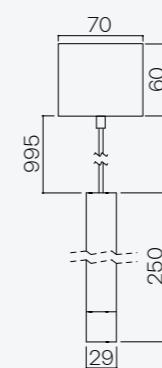

PM 29-500_p on

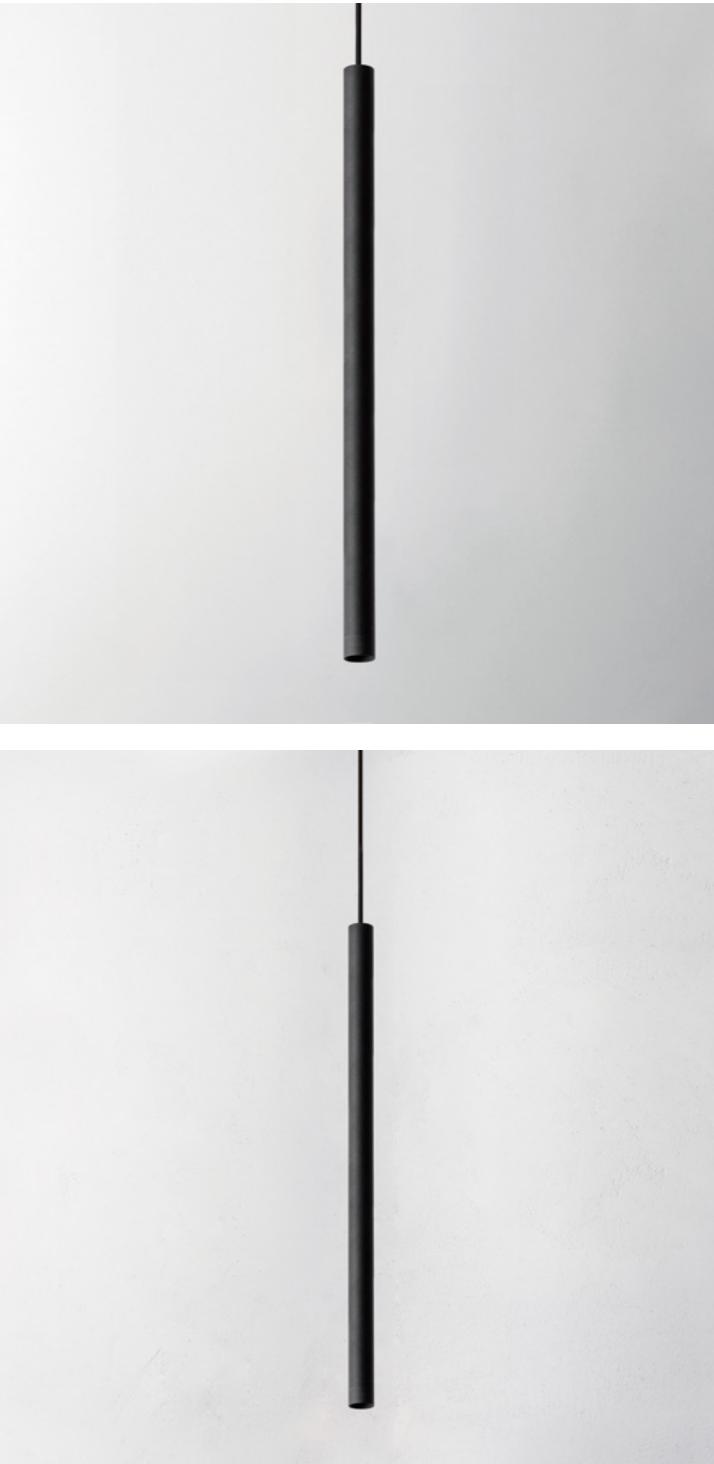

Luminary Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
8250.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
8250.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
8250.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
8250.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R




Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Ask for recessed base.
Base de empotrar, consultar.

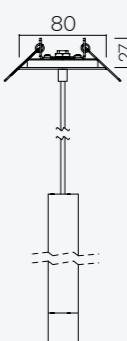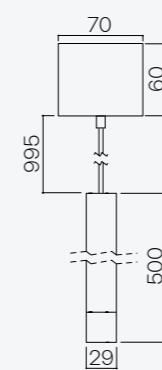

PM 33

by eng



Designed with accurate optical control and optimum visual comfort,
our PM 33 models offer flexible and precise lighting solutions.

*Diseñadas con un preciso control óptico y un óptimo confort visual,
nuestros modelos PM 33 ofrecen soluciones lumínicas flexibles y precisas.*



Recessed

in dl p. 50 in dl+ p. 52 in spot p. 56

Pendant

250_p on p. 60 500_p on p. 64

PM 33_in dl



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

- ### Dimming Regulación
- NO-DRV
 - DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

W

Beam angle

CRI

K

Lm

Efficiency

2245.I2700710.x	8,2W	10°	95	2700K	527Lm	65Lm/W
2245.I2700715.x	8,2W	15°	95	2700K	527Lm	65Lm/W
2245.I2700724.x	8,2W	24°	95	2700K	527Lm	65Lm/W
2245.I2700736.x	8,2W	36°	95	2700K	527Lm	65Lm/W
2245.I2700750.x	8,2W	50°	95	2700K	527Lm	65Lm/W
2245.I3000710.x	8,2W	10°	95	3000K	547Lm	67Lm/W
2245.I3000715.x	8,2W	15°	95	3000K	547Lm	67Lm/W
2245.I3000724.x	8,2W	24°	95	3000K	547Lm	67Lm/W
2245.I3000736.x	8,2W	36°	95	3000K	547Lm	67Lm/W
2245.I3000750.x	8,2W	50°	95	3000K	547Lm	67Lm/W
2245.I4000710.x	8,2W	10°	95	4000K	574Lm	70Lm/W
2245.I4000715.x	8,2W	15°	95	4000K	574Lm	70Lm/W
2245.I4000724.x	8,2W	24°	95	4000K	574Lm	70Lm/W
2245.I4000736.x	8,2W	36°	95	4000K	574Lm	70Lm/W
2245.I4000750.x	8,2W	50°	95	4000K	574Lm	70Lm/W

Tunable White

2245.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2245.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2245.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2245.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



PM 33_in dl+



PM 33_in dl+



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

W

Beam angle

CRI

K

Lm


Efficiency

2246.I2700710.x	8,2W	10°	95	2700K	527Lm	65Lm/W
2246.I2700715.x	8,2W	15°	95	2700K	527Lm	65Lm/W
2246.I2700724.x	8,2W	24°	95	2700K	527Lm	65Lm/W
2246.I2700736.x	8,2W	36°	95	2700K	527Lm	65Lm/W
2246.I2700750.x	8,2W	50°	95	2700K	527Lm	65Lm/W
2246.I3000710.x	8,2W	10°	95	3000K	547Lm	67Lm/W
2246.I3000715.x	8,2W	15°	95	3000K	547Lm	67Lm/W
2246.I3000724.x	8,2W	24°	95	3000K	547Lm	67Lm/W
2246.I3000736.x	8,2W	36°	95	3000K	547Lm	67Lm/W
2246.I3000750.x	8,2W	50°	95	3000K	547Lm	67Lm/W
2246.I4000710.x	8,2W	10°	95	4000K	574Lm	70Lm/W
2246.I4000715.x	8,2W	15°	95	4000K	574Lm	70Lm/W
2246.I4000724.x	8,2W	24°	95	4000K	574Lm	70Lm/W
2246.I4000736.x	8,2W	36°	95	4000K	574Lm	70Lm/W
2246.I4000750.x	8,2W	50°	95	4000K	574Lm	70Lm/W

Tunable White

2246.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2246.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2246.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2246.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W


PM 33_in spot

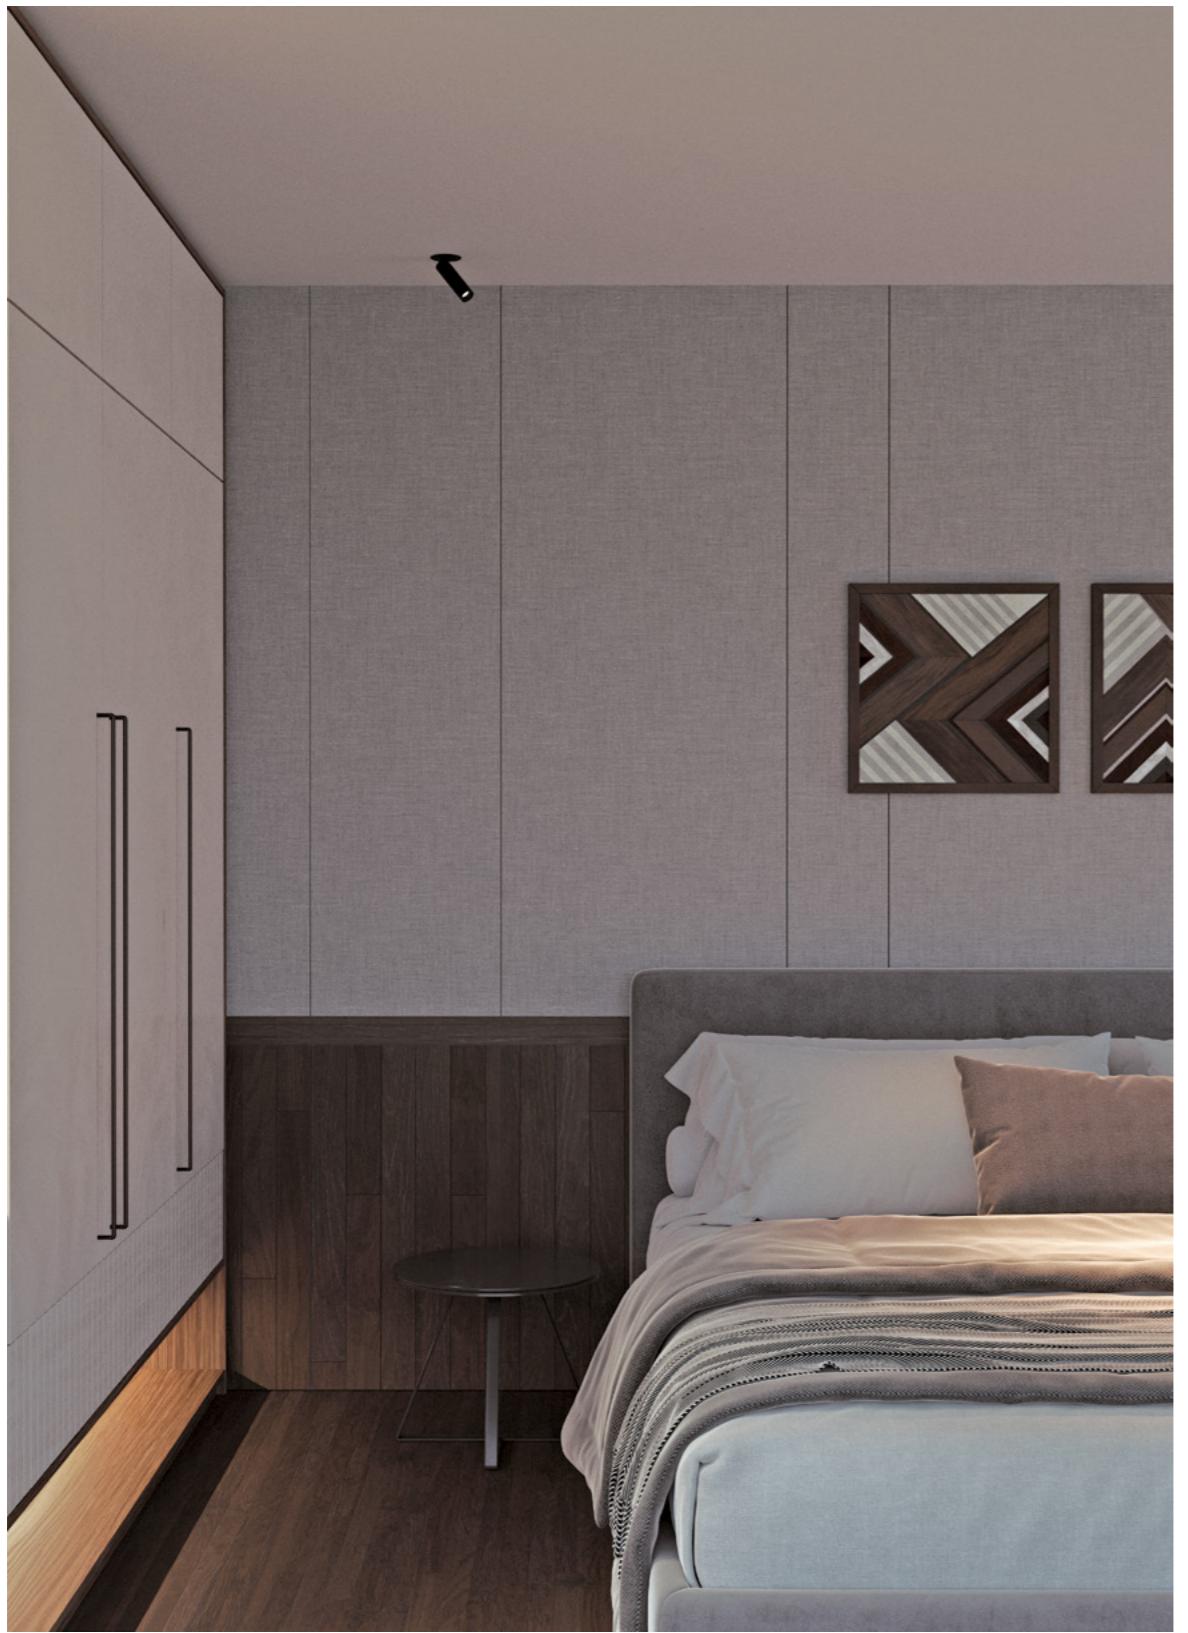

56 — Recessed



PM 33_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

W

Beam angle

CRI

K

Lm

Efficience

2243.I2700710.x	8,2W	10°	95	2700K	527Lm	65Lm/W
2243.I2700715.x	8,2W	15°	95	2700K	527Lm	65Lm/W
2243.I2700724.x	8,2W	24°	95	2700K	527Lm	65Lm/W
2243.I2700736.x	8,2W	36°	95	2700K	527Lm	65Lm/W
2243.I2700750.x	8,2W	50°	95	2700K	527Lm	65Lm/W
2243.I3000710.x	8,2W	10°	95	3000K	547Lm	67Lm/W
2243.I3000715.x	8,2W	15°	95	3000K	547Lm	67Lm/W
2243.I3000724.x	8,2W	24°	95	3000K	547Lm	67Lm/W
2243.I3000736.x	8,2W	36°	95	3000K	547Lm	67Lm/W
2243.I3000750.x	8,2W	50°	95	3000K	547Lm	67Lm/W
2243.I4000710.x	8,2W	10°	95	4000K	574Lm	70Lm/W
2243.I4000715.x	8,2W	15°	95	4000K	574Lm	70Lm/W
2243.I4000724.x	8,2W	24°	95	4000K	574Lm	70Lm/W
2243.I4000736.x	8,2W	36°	95	4000K	574Lm	70Lm/W
2243.I4000750.x	8,2W	50°	95	4000K	574Lm	70Lm/W
2243.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2243.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2243.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2243.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W

Tunable White

Dimming Regulación

Regulación

Dimming

Regulación



PM 37-250_p on



60 — Pendant



PM 37-250_p on

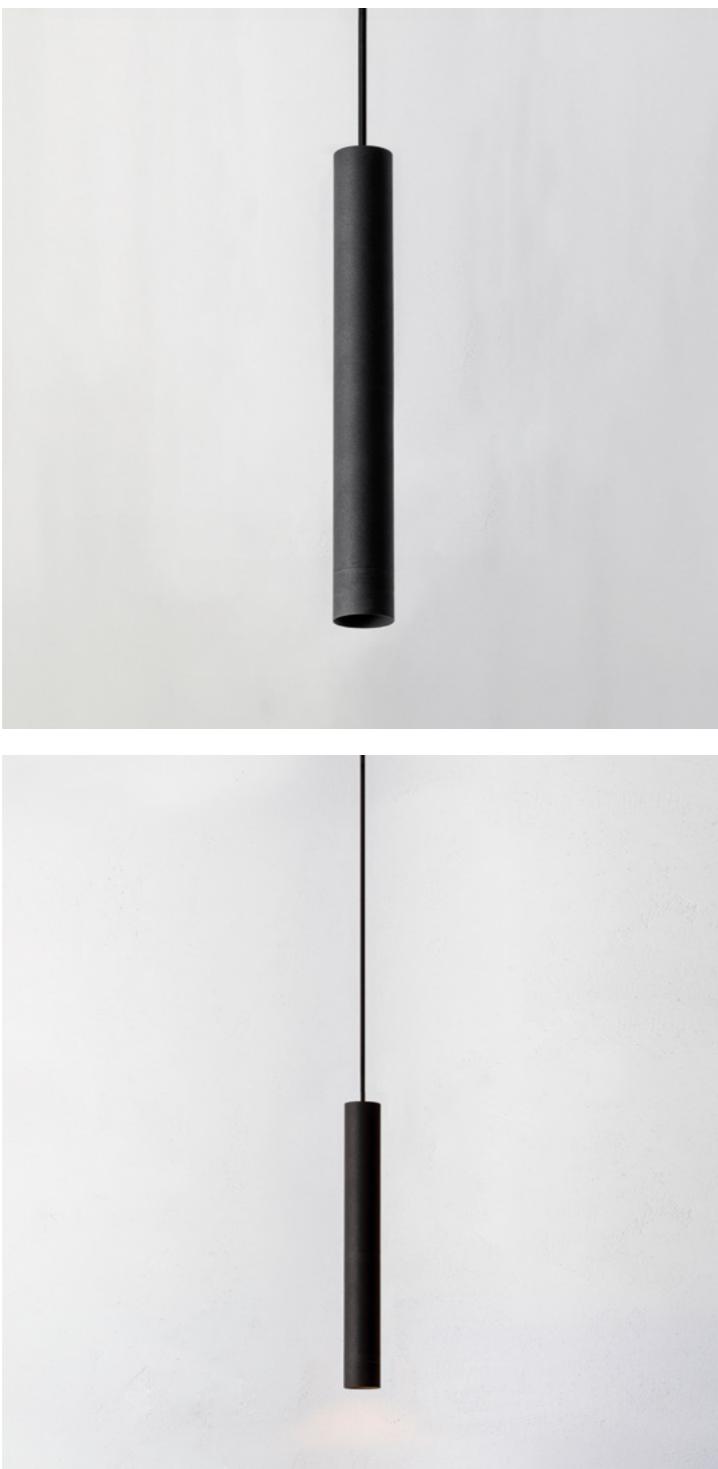

Luminary Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Ask for recessed base.
Base de empotrar, consultar.

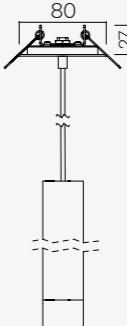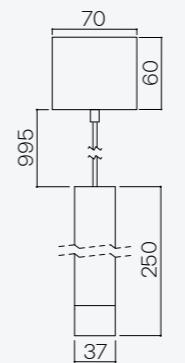

PM 37-500_p on

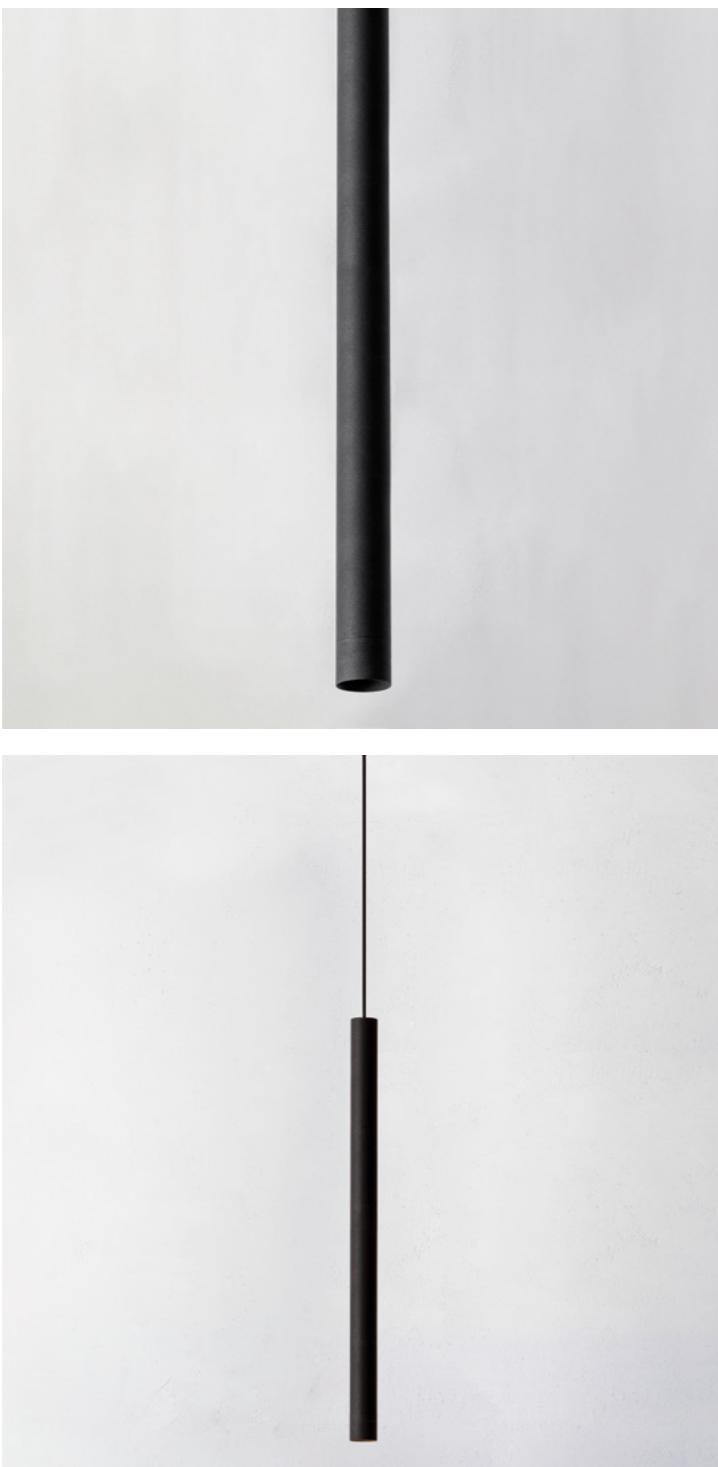

Luminary Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes Acabados básicos

- Black
- White

Special finishes Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

W

Beam angle

CRI




K

Lm

Efficiency


8950.I2700710.x	8,2W	10°	95	2700K	527Lm	65Lm/W
8950.I2700715.x	8,2W	15°	95	2700K	527Lm	65Lm/W
8950.I2700724.x	8,2W	24°	95	2700K	527Lm	65Lm/W
8950.I2700736.x	8,2W	36°	95	2700K	527Lm	65Lm/W
8950.I2700750.x	8,2W	50°	95	2700K	527Lm	65Lm/W
8950.I3000710.x	8,2W	10°	95	3000K	547Lm	67Lm/W
8950.I3000715.x	8,2W	15°	95	3000K	547Lm	67Lm/W
8950.I3000724.x	8,2W	24°	95	3000K	547Lm	67Lm/W
8950.I3000736.x	8,2W	36°	95	3000K	547Lm	67Lm/W
8950.I3000750.x	8,2W	50°	95	3000K	547Lm	67Lm/W
8950.I4000710.x	8,2W	10°	95	4000K	574Lm	70Lm/W
8950.I4000715.x	8,2W	15°	95	4000K	574Lm	70Lm/W
8950.I4000724.x	8,2W	24°	95	4000K	574Lm	70Lm/W
8950.I4000736.x	8,2W	36°	95	4000K	574Lm	70Lm/W
8950.I4000750.x	8,2W	50°	95	4000K	574Lm	70Lm/W

Ask for recessed base.
Base de empotrar, consultar.

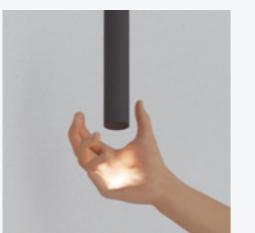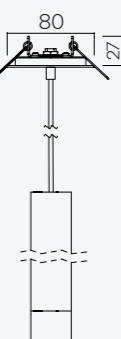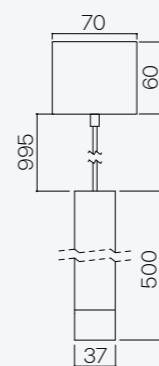


PM 46_in dl zoom

by eng

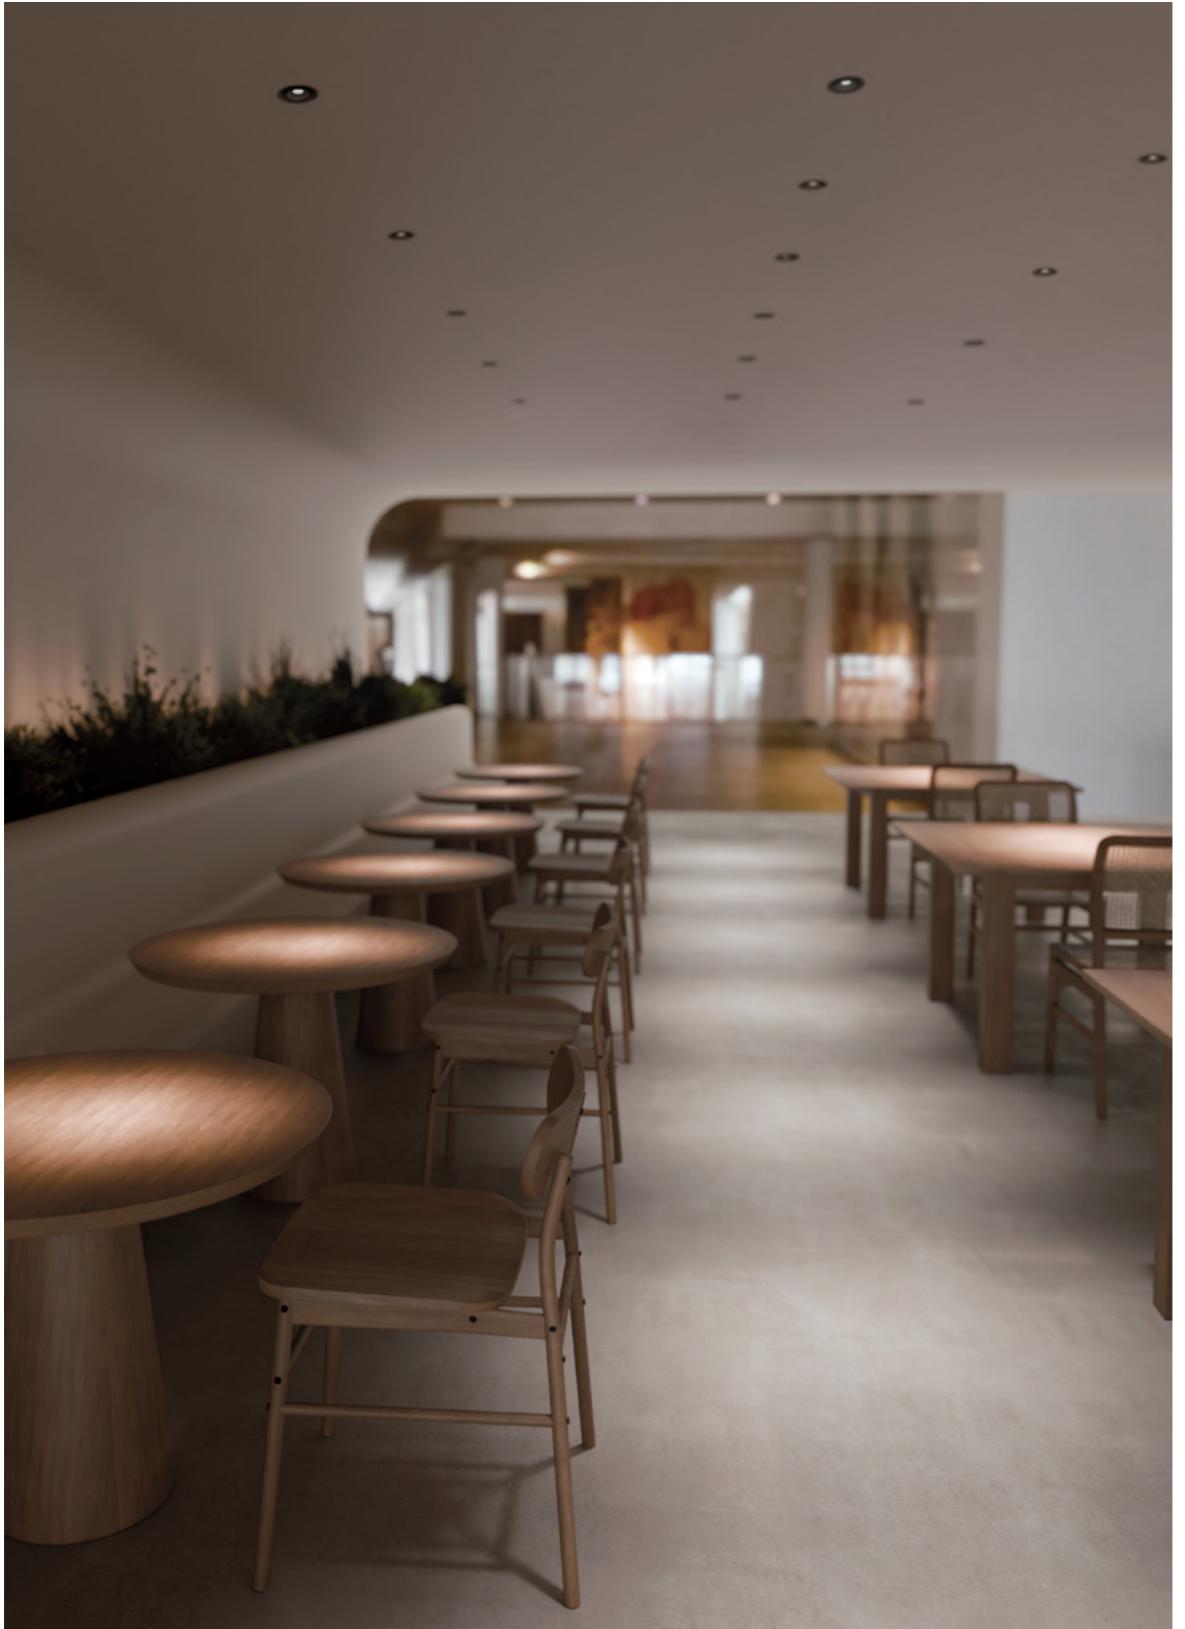

PM 46_in dl zoom

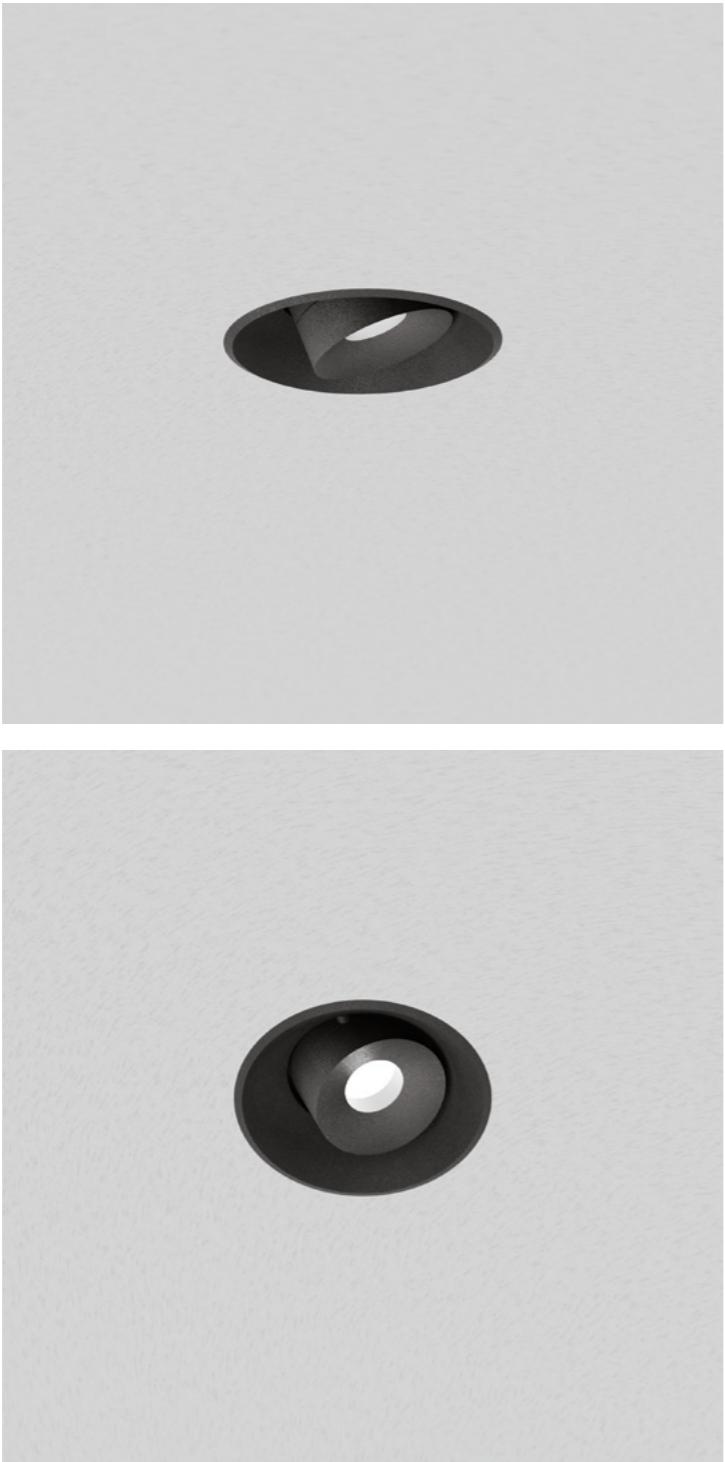

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- Driver not included
- DALI DT8

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas





Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
2261.I27007ZM.x	8,2W	16-45°	95	2700K	422Lm	52Lm/W
2261.I30007ZM.x	8,2W	16-45°	95	3000K	438Lm	54Lm/W
2261.I40007ZM.x	8,2W	16-45°	95	4000K	460Lm	57Lm/W

Tunable White

2261.TWB005ZM.x	6,2W	16-45°	90	1800-4000K	-	-
-----------------	------	--------	----	------------	---	---

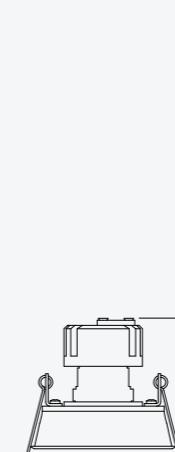

PM 55

by eng



Recessed

in dl p. 72 in dl- p. 76 in dl+ p. 78 in dl+ tl p. 82

in spot p. 84 + in spot p. 88

Surface

+ on spot p. 92

Magnetic

trk mag p. 96 + trk mag p. 98

Tracklight


+ trk 230v p. 100

The PM 55 model offers several lighting options; for accent lighting as well as general lighting. Its stylish and attractive design is ideal for any type of space.

El modelo PM 55 nos ofrece múltiples opciones de iluminación; tanto de acento como iluminación general. Su atractivo diseño de cuidadas líneas es ideal para cualquier tipo de espacio.





PM 55_in dl

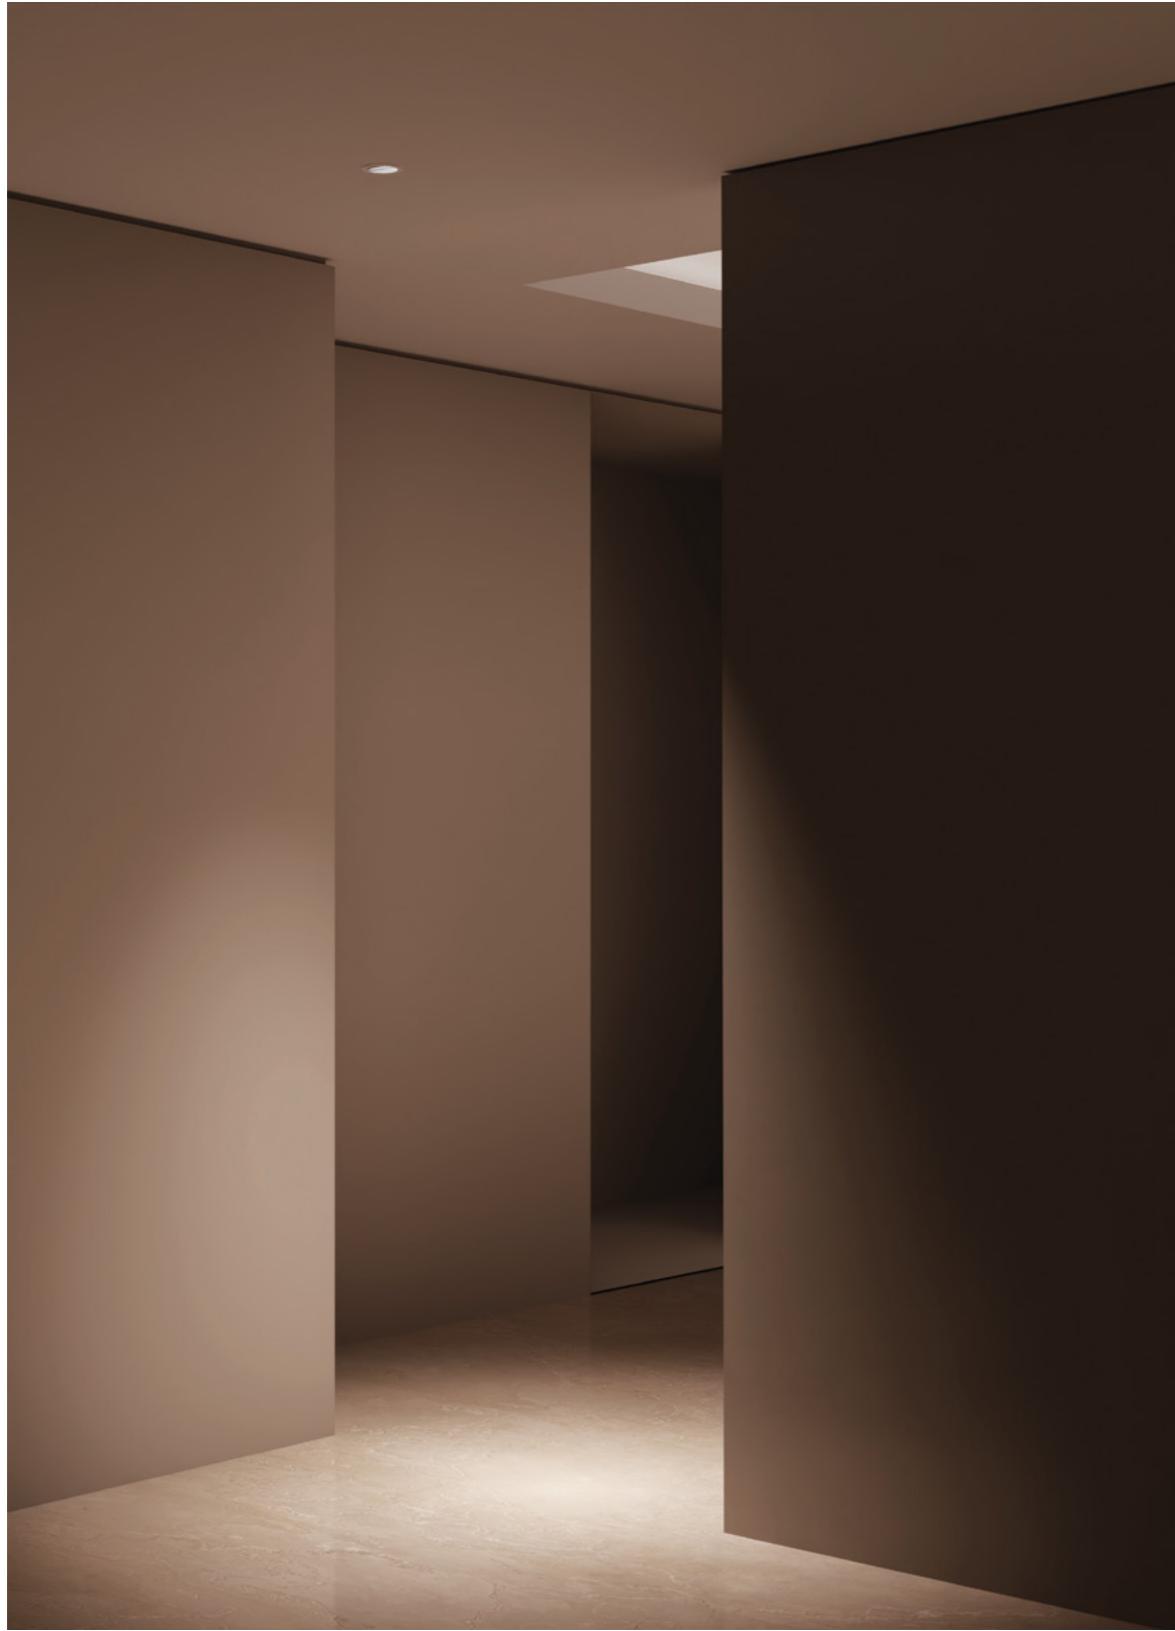

72 — Recessed



PM 55_in dl

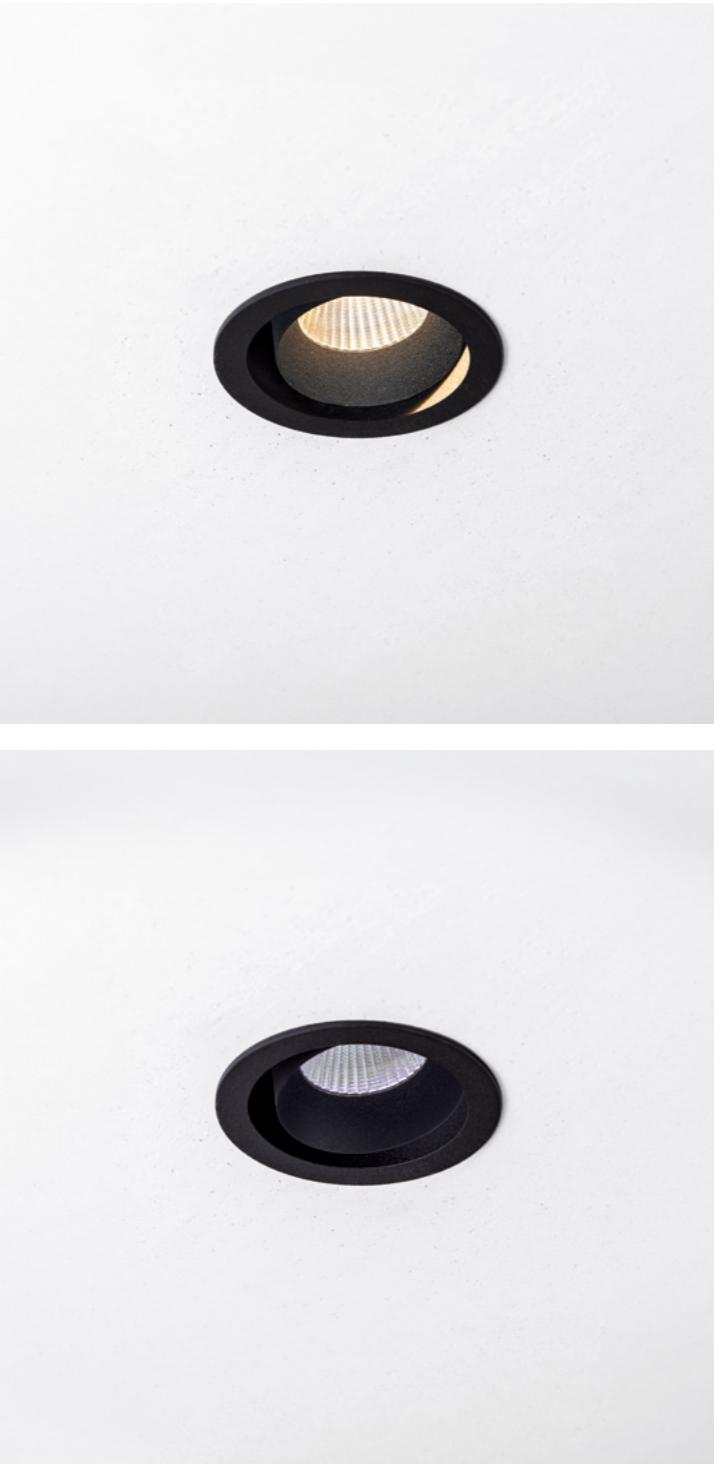

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2209.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2209.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2209.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2209.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2209.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2209.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2209.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2209.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2209.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

2209.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2209.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2209.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2209.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2209.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2209.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2209.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2209.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2209.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

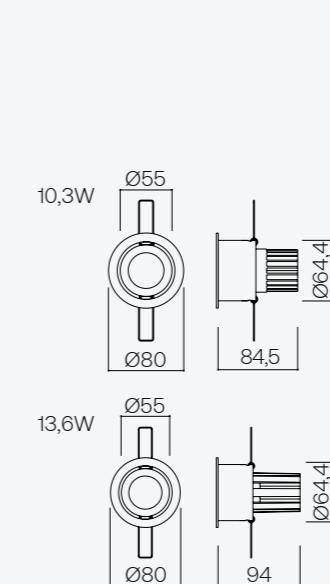

PM 55_in dl-



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico



- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2211.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2211.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2211.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2211.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2211.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2211.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2211.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2211.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2211.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

2211.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2211.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2211.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2211.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2211.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2211.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2211.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2211.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2211.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

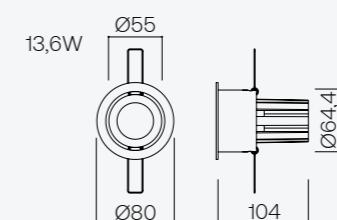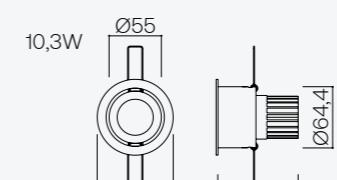


PM 55_in dl+

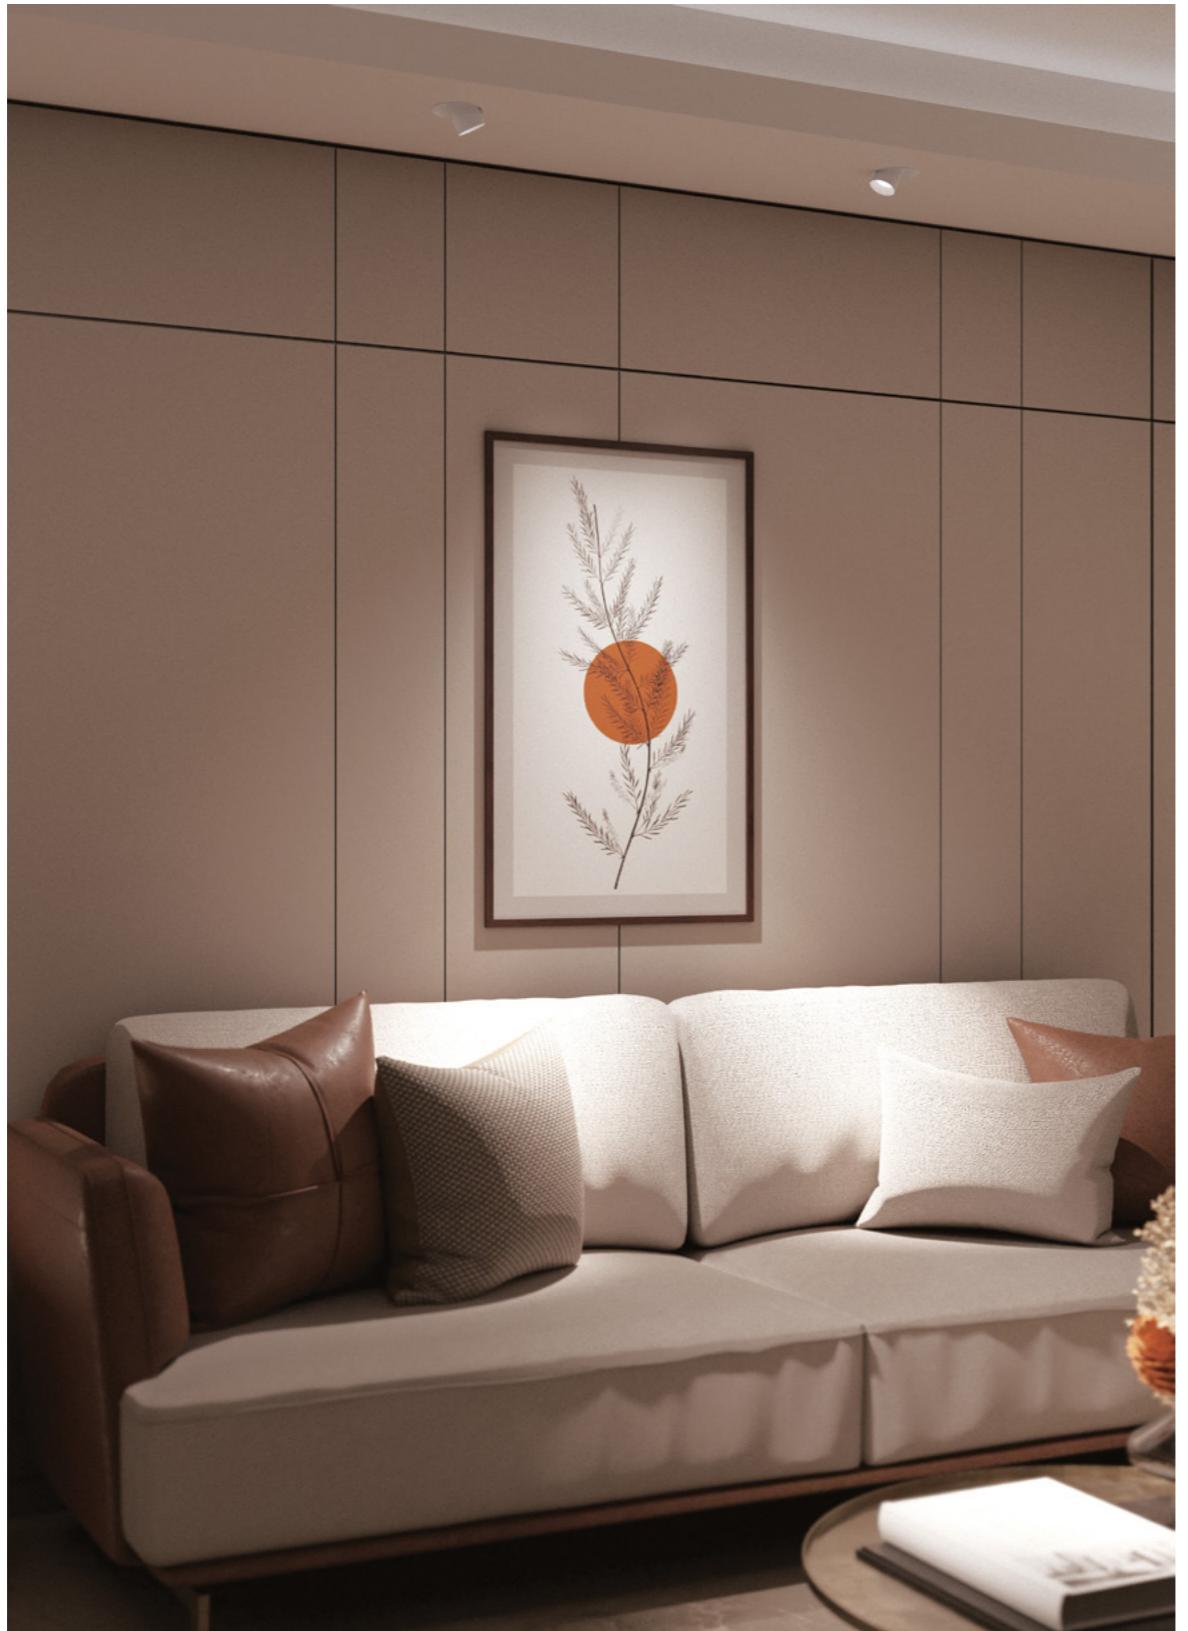

78 – Recessed



PM 55_in dl+



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2230.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2230.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2230.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2230.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2230.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2230.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2230.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2230.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2230.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

2230.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2230.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2230.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2230.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2230.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2230.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2230.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2230.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2230.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

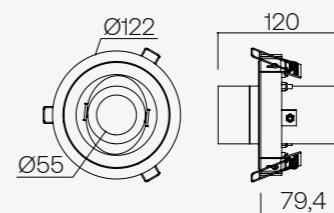

PM 55_in dl+ tl



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2062.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2062.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2062.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2062.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2062.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2062.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2062.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2062.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2062.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

2062.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2062.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2062.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2062.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2062.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2062.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2062.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2062.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2062.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

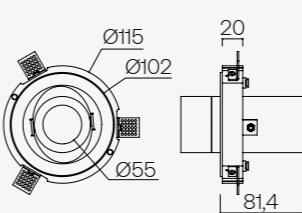

PM 55_in spot

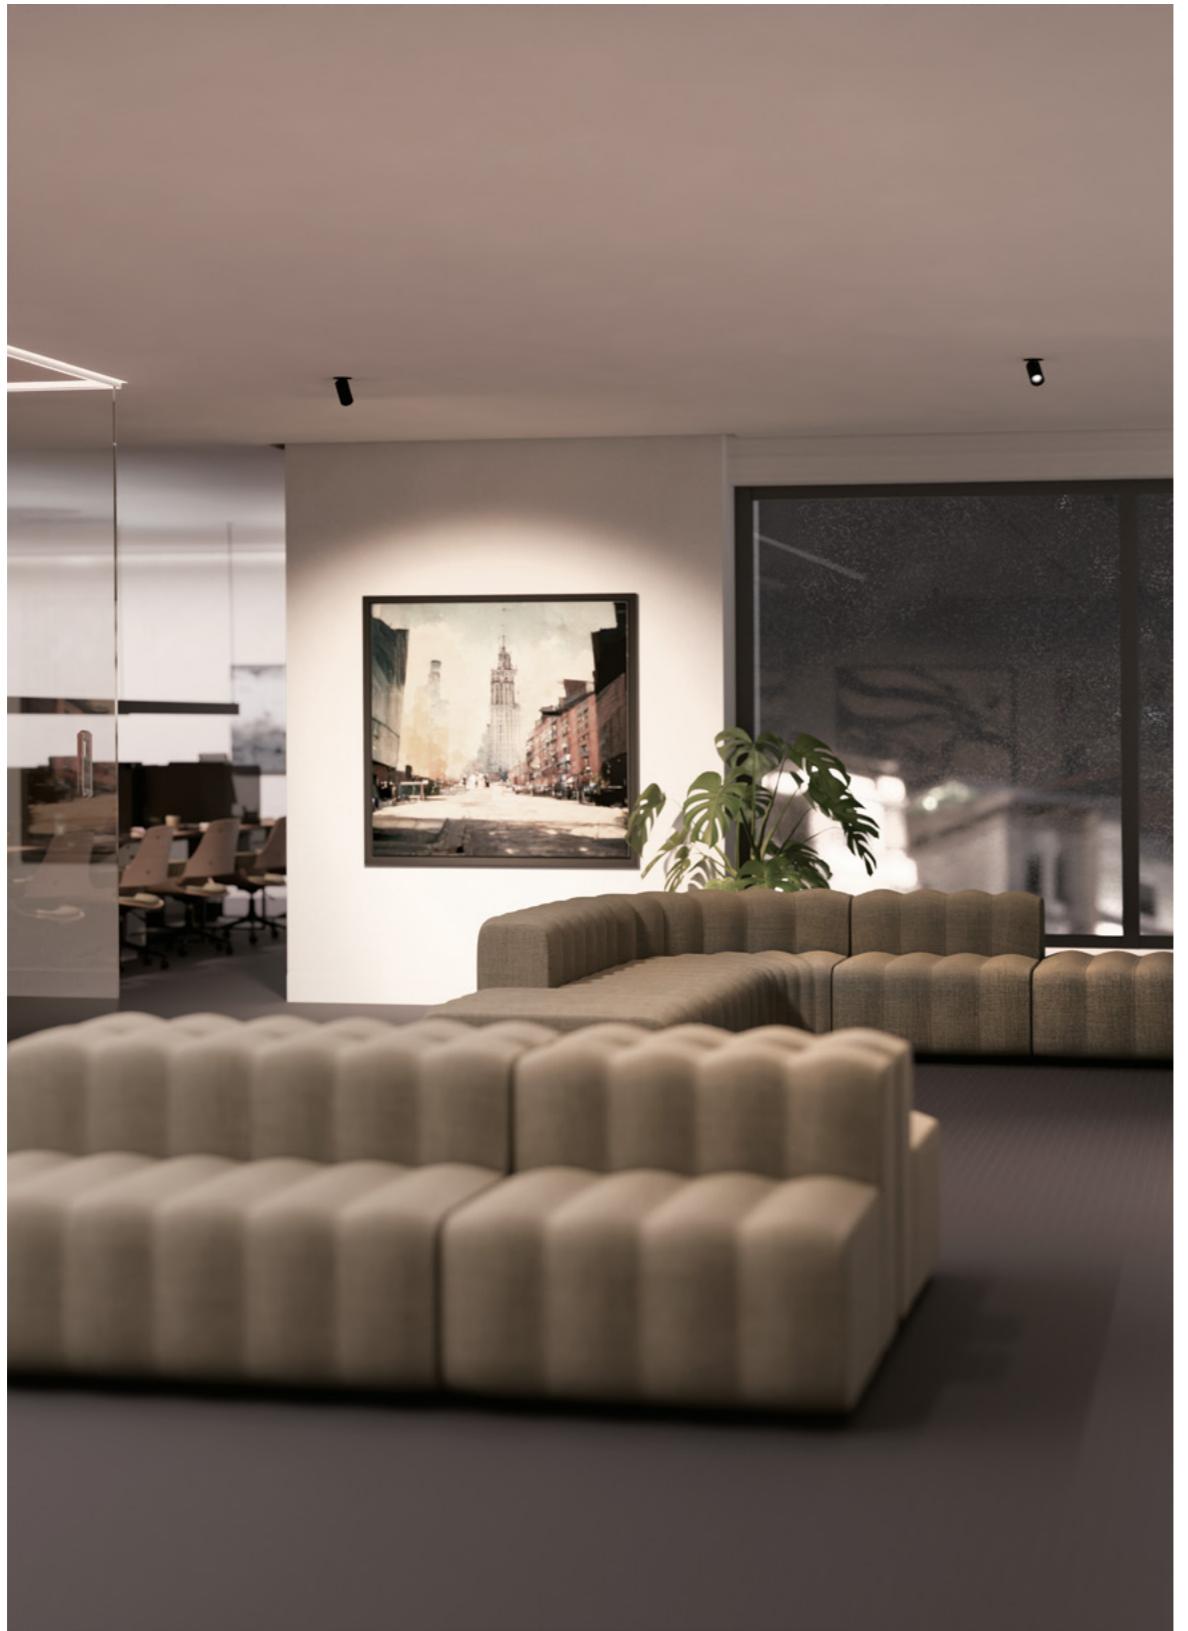

84 – Recessed



PM 55_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2204.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2204.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2204.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2204.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2204.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2204.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2204.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2204.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2204.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

2204.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2204.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2204.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2204.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2204.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2204.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2204.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2204.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2204.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

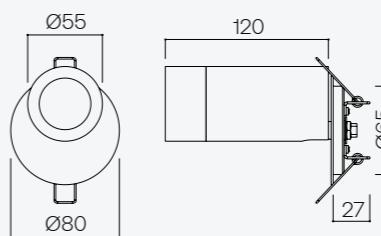

PM 55+_in spot

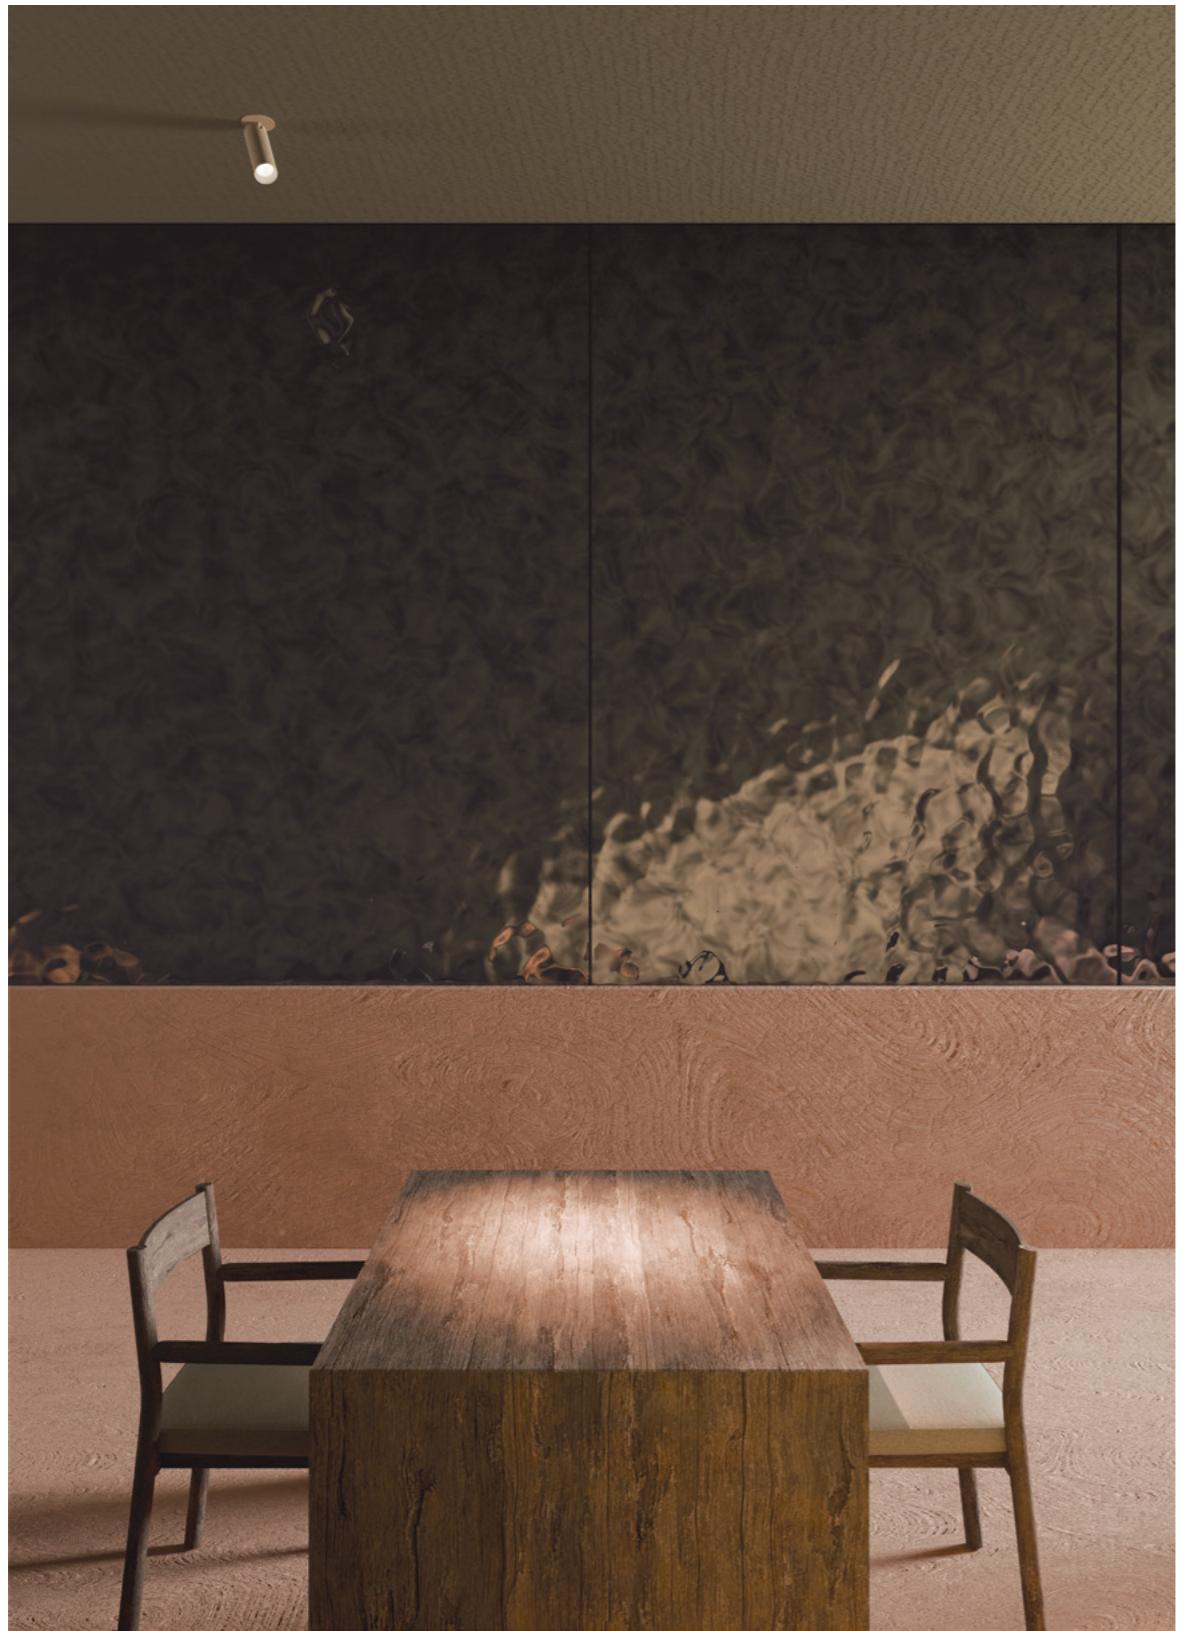

88 — Recessed



PM 55+_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2231.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2231.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2231.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2231.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2231.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2231.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2231.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2231.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2231.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2231.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2231.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2231.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2231.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2231.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2231.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2231.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2231.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2231.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

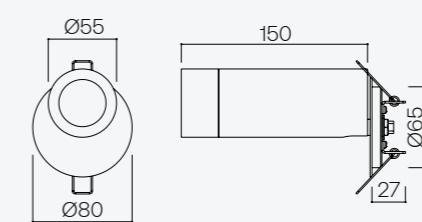


PM 55+_on spot



92 — Surface



PM 55+_on spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficience
2229.92700920x	10,3W	20°	90	2700K	683Lm	67Lm/W
2229.92700940x	10,3W	40°	90	2700K	683Lm	67Lm/W
2229.92700960x	10,3W	60°	90	2700K	683Lm	67Lm/W
2229.93000920x	10,3W	20°	90	3000K	779Lm	76Lm/W
2229.93000940x	10,3W	40°	90	3000K	779Lm	76Lm/W
2229.93000960x	10,3W	60°	90	3000K	779Lm	76Lm/W
2229.94000920x	10,3W	20°	90	4000K	870Lm	85Lm/W
2229.94000940x	10,3W	40°	90	4000K	870Lm	85Lm/W
2229.94000960x	10,3W	60°	90	4000K	870Lm	85Lm/W

2229.92701225x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2229.92701243x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2229.92701260x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2229.93001225x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2229.93001243x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2229.93001260x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2229.94001225x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2229.94001243x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2229.94001260x	13,6W	60°	90	4000K	1318Lm	97Lm/W

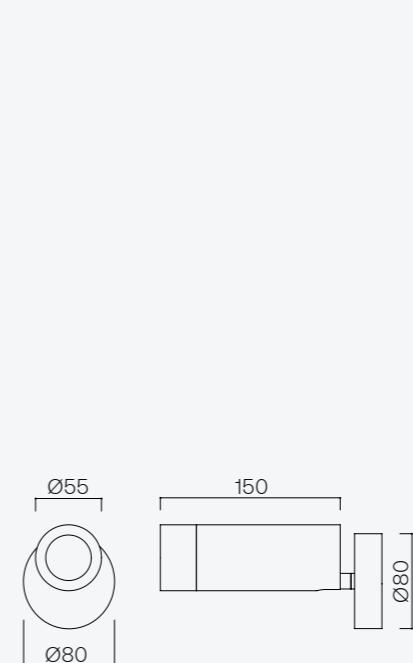

PM 55_trk mag



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - Integrado

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficience
6203.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
6203.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
6203.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
6203.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
6203.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
6203.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
6203.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
6203.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
6203.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
6203.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
6203.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
6203.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
6203.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
6203.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
6203.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
6203.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
6203.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
6203.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

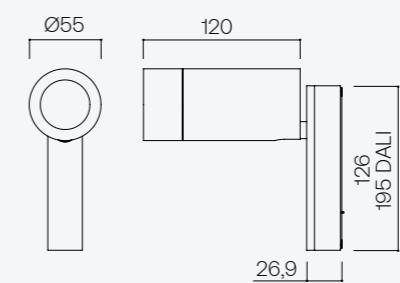

PM 55+_trk mag



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - Integrado

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficience
6208.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
6208.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
6208.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
6208.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
6208.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
6208.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
6208.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
6208.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
6208.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
6208.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
6208.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
6208.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
6208.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
6208.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
6208.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
6208.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
6208.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
6208.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

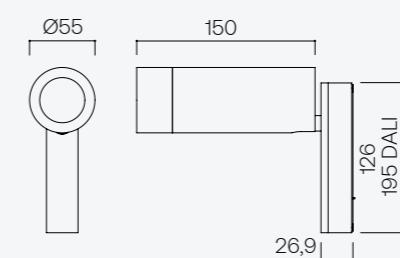

PM 55+_trk 230V



Luminary Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Profile Carril

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficience
6209.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
6209.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
6209.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
6209.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
6209.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
6209.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
6209.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
6209.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
6209.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

6209.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
6209.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
6209.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
6209.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
6209.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
6209.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
6209.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
6209.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
6209.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

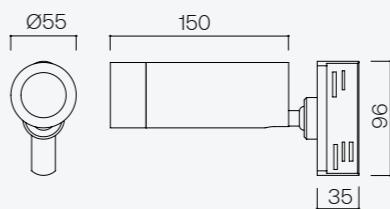

PM 70

by eng



Inspired by the AR70, the PM70 model brings us high quality lighting combined with an exclusive and delicate design.

Inspirado en la AR70, el modelo PM 70 nos aporta una iluminación de gran calidad unido a un exclusivo y delicado diseño.

Recessed

in spot p. 104

Surface

on fix p. 108 on slim p. 112

Pendant

p on p. 116





PM 70_in spot



104 — Recessed



PM 70_in spot

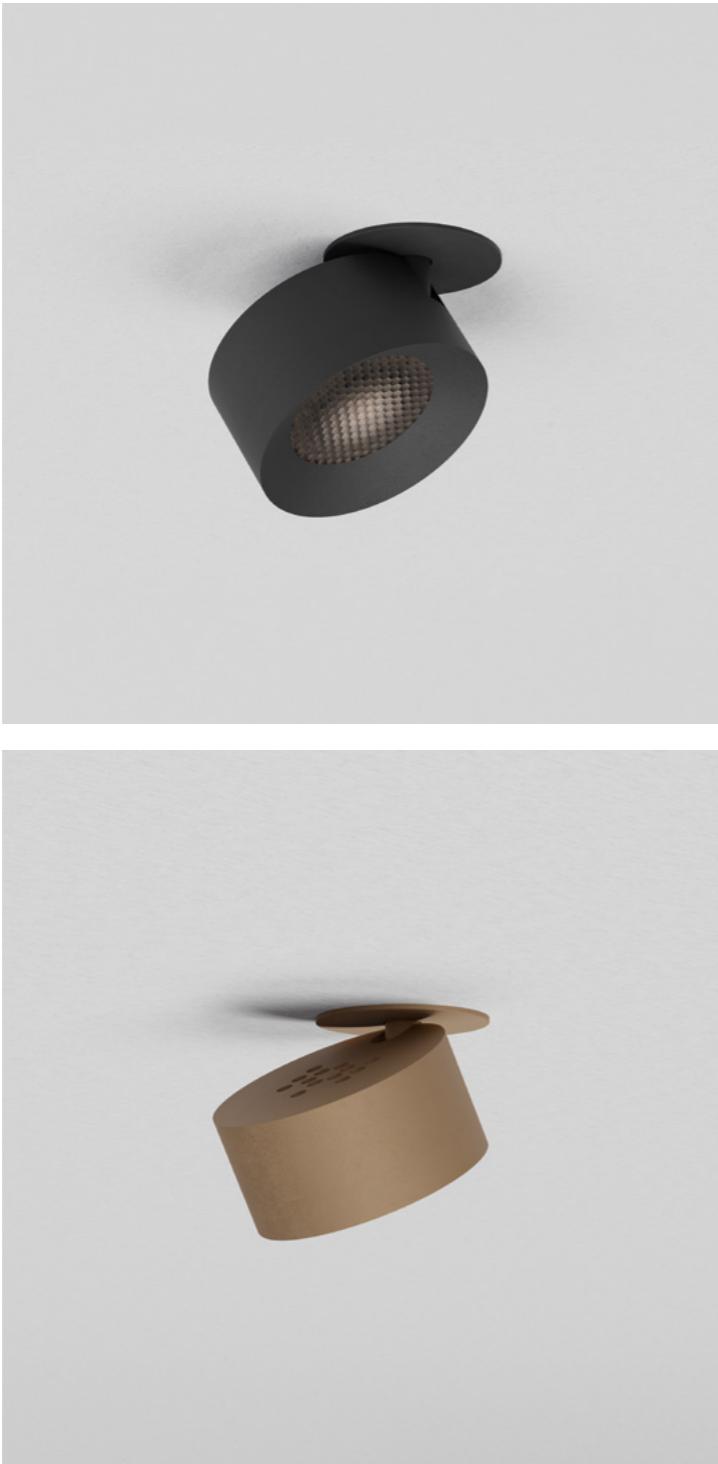

Luminary Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
- Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas





Cod.	W	Beam angle	CRI	K	Lm	Efficience
2249.927007HA.x	8,2W	HC15°	90	2700K	594Lm	73Lm/W
2249.927007HCx	8,2W	HC36°	90	2700K	594Lm	73Lm/W
2249.930007HA.x	8,2W	HC15°	90	3000K	638Lm	78Lm/W
2249.930007HC.x	8,2W	HC36°	90	3000K	638Lm	78Lm/W
2249.940007HA.x	8,2W	HC15°	90	4000K	688Lm	84Lm/W
2249.940007HC.x	8,2W	HC36°	90	4000K	688Lm	84Lm/W

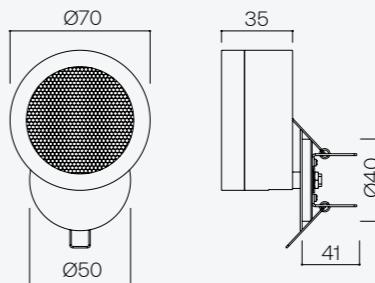

PM 70_on fix



PM 70_on fix

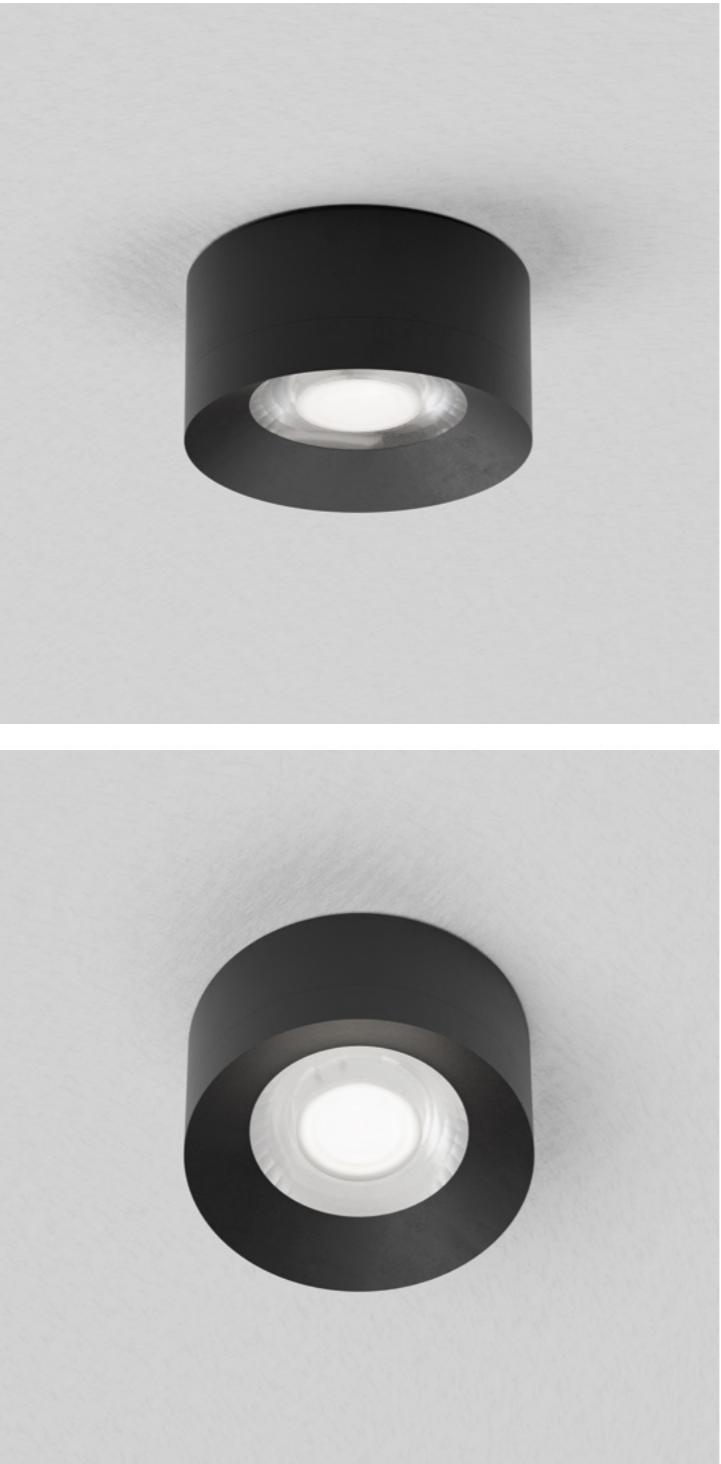

Luminary

- Luminária**
 • L70 > 35000h
 • MacAdam 3
 • UGR <19

Cod.

	W	Beam angle	CRI	K	Lm	Efficiency
2247.92700536.x	6W	36°	90	2700K	383Lm	64Lm/W
2247.93000536.x	6W	36°	90	3000K	417Lm	70Lm/W

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



PM 70_on slim

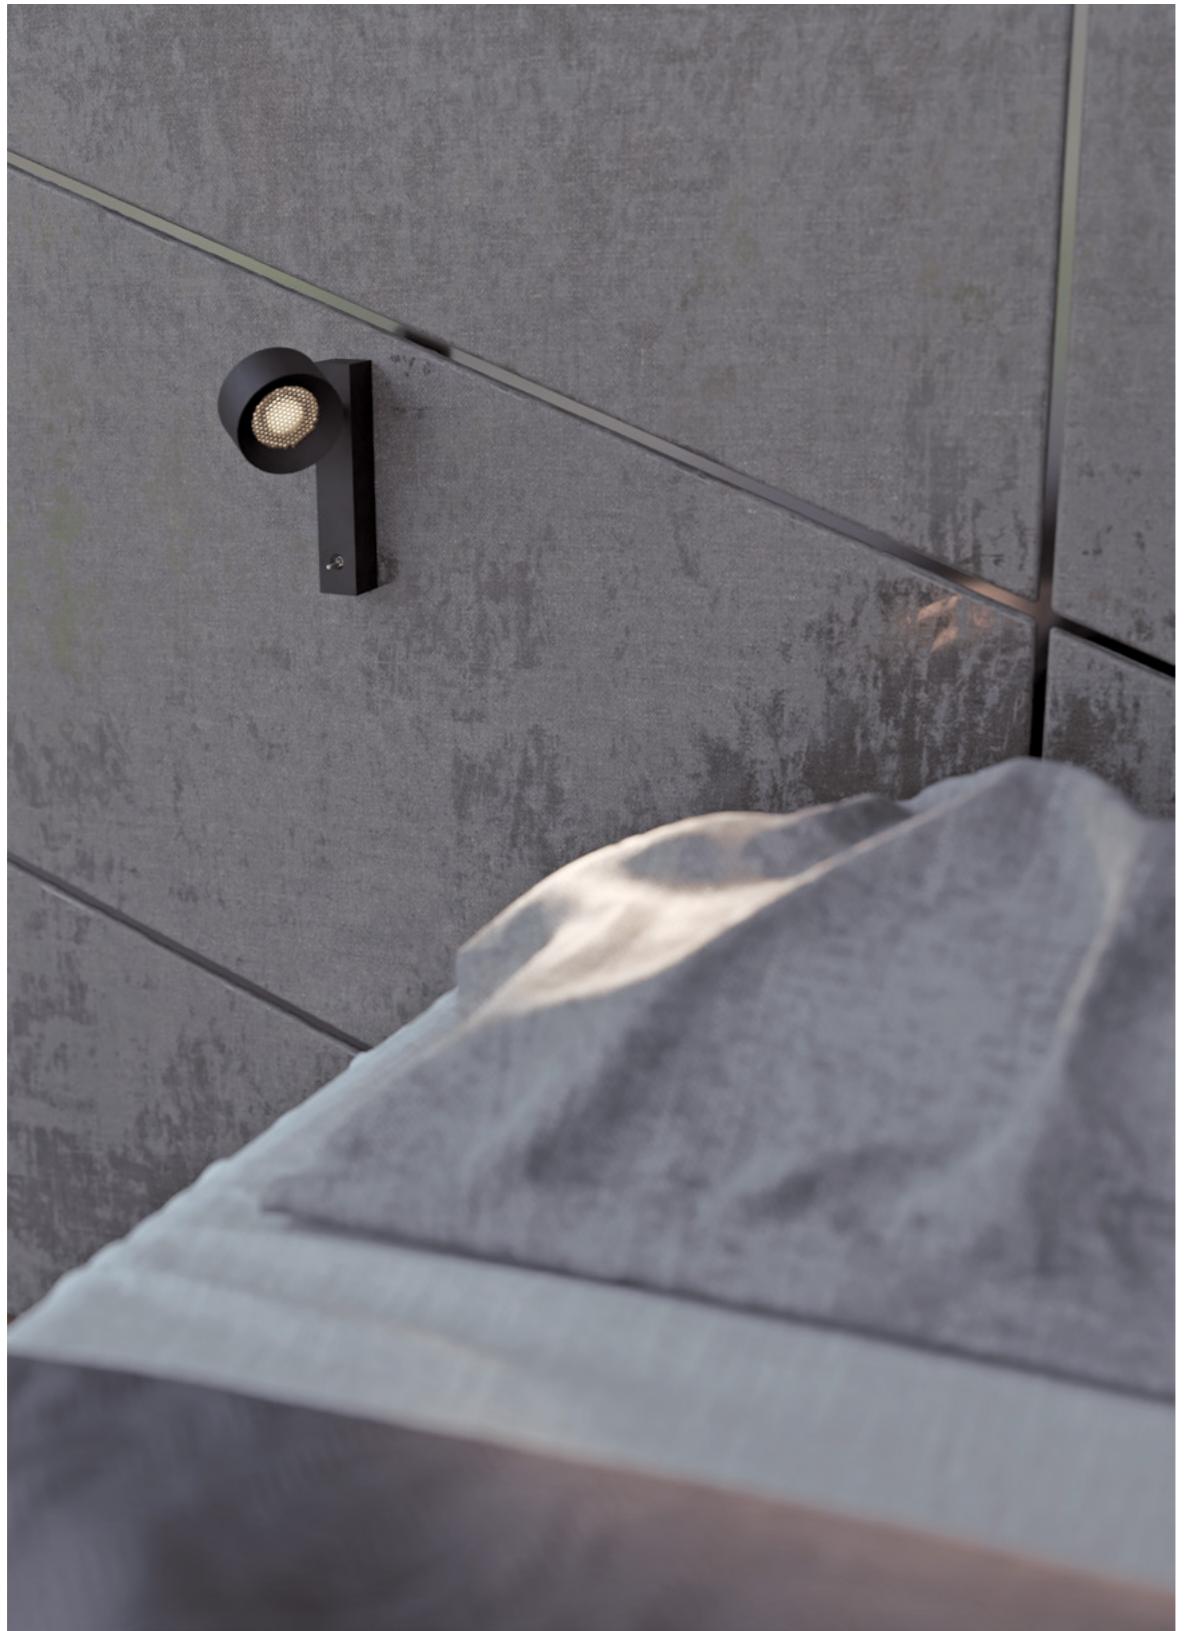

PM 70_on slim



Luminary

Luminária

- L70 > 35000h
- MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Cod.

W

Beam angle

CRI

K

Lm

Efficience

2258.927005HCx	6W	HC36°	90	2700K	475Lm	77Lm/W
2258.927005HA.x	6W	HC15°	90	2700K	475Lm	77Lm/W
2258.930005HCx	6W	HC36°	90	3000K	510Lm	83Lm/W
2258.930005HA.x	6W	HC15°	90	3000K	510Lm	83Lm/W
2258.940005HCx	6W	HC36°	90	4000K	550Lm	89Lm/W
2258.940005HA.x	6W	HC15°	90	4000K	550Lm	89Lm/W

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- With switch
Con interruptor

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas

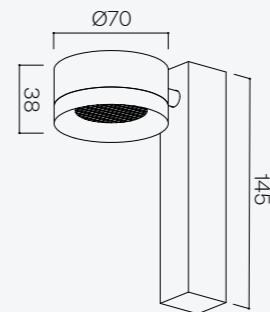


PM 70_p on



116 — Pendant



PM 70_p on



118 — Pendant

Luminary Luminária

- L70 > 35000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
- Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Ask for recessed base.
Base de empotrar, consultar.

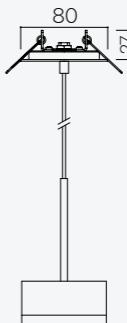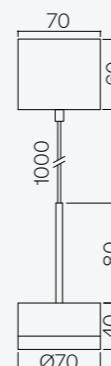

PM 111

by eng



Our innovative design, based on the classic AR111, keeps the elegance and visual comfort of the original, with high luminous efficiency and low energy consumption.

Nuestro innovador diseño basado en la clásica AR111, conserva la elegancia y confort visual original, sumando una gran eficiencia lumínica y bajo consumo.



Recessed

in spot p. 122

Surface

on fix p. 126 on mov p. 130

Pendant

p on p. 134

Magnetic

trk mag p. 138


Track

trk 230v p. 142

Outdoor

baliza p. 226 on fix ip p. 236

PM 111_in spot

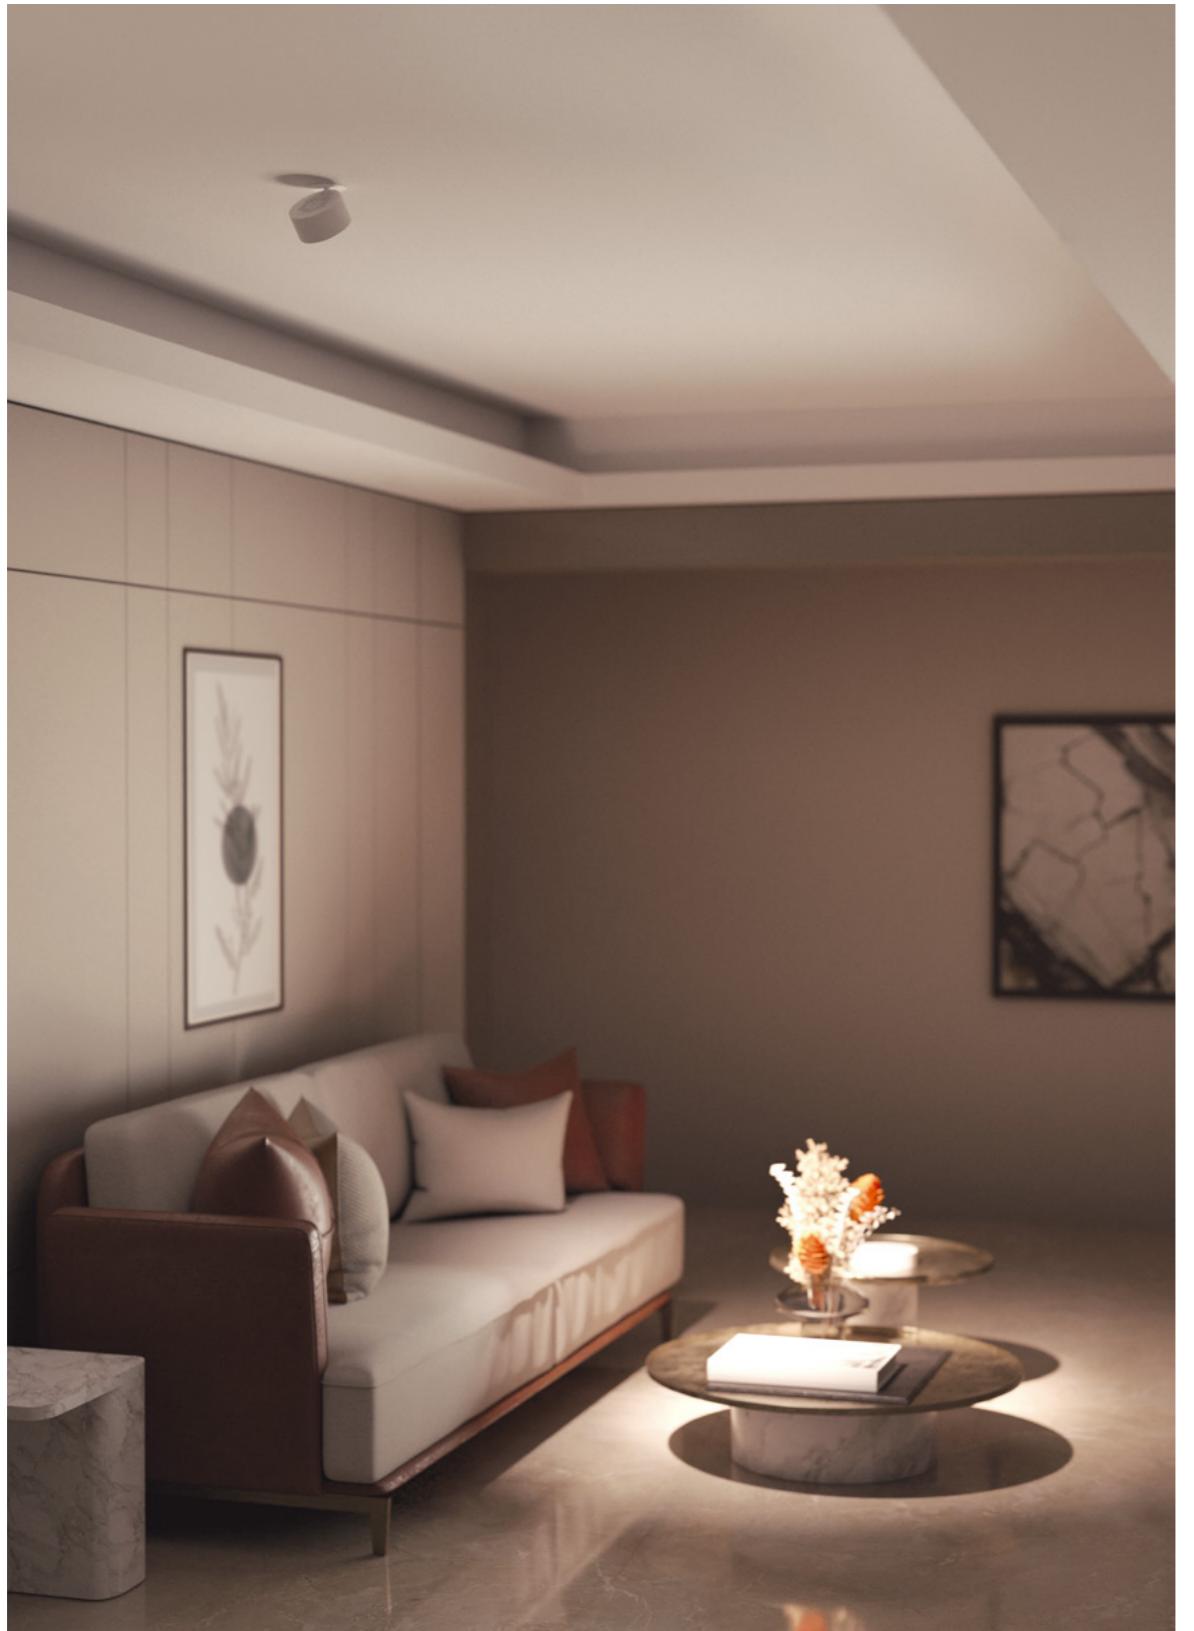

122 — Recessed



PM 111_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Cod.

W

Beam angle

CRI

K

Lm

Efficience

2227.927018HAx	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
2227.927018HCx	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
2227.930018HAx	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
2227.930018HCx	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
2227.940018HAx	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
2227.940018HCx	20,7W	HC36°	90	4000K	1698Lm	82Lm/W

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas

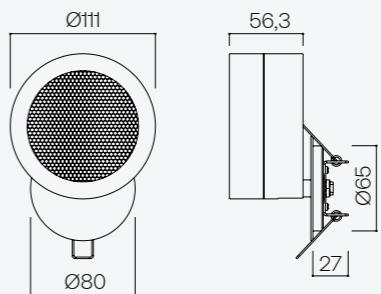


PM 111_on fix



126 — Surface



PM 111_on fix



Luminary

Luminária

- L70 > 35000h
- MacAdam 3
- UGR <19

Cod.

2232.92701336x

W

15W

Beam angle

36°

CRI

90

K

2700K

Lm

1020Lm
68Lm/W

Efficience

73Lm/W

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico



- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas

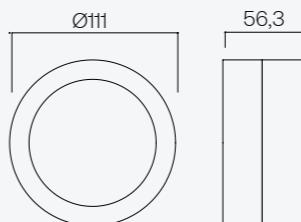


PM 111_on mov

by Her design team

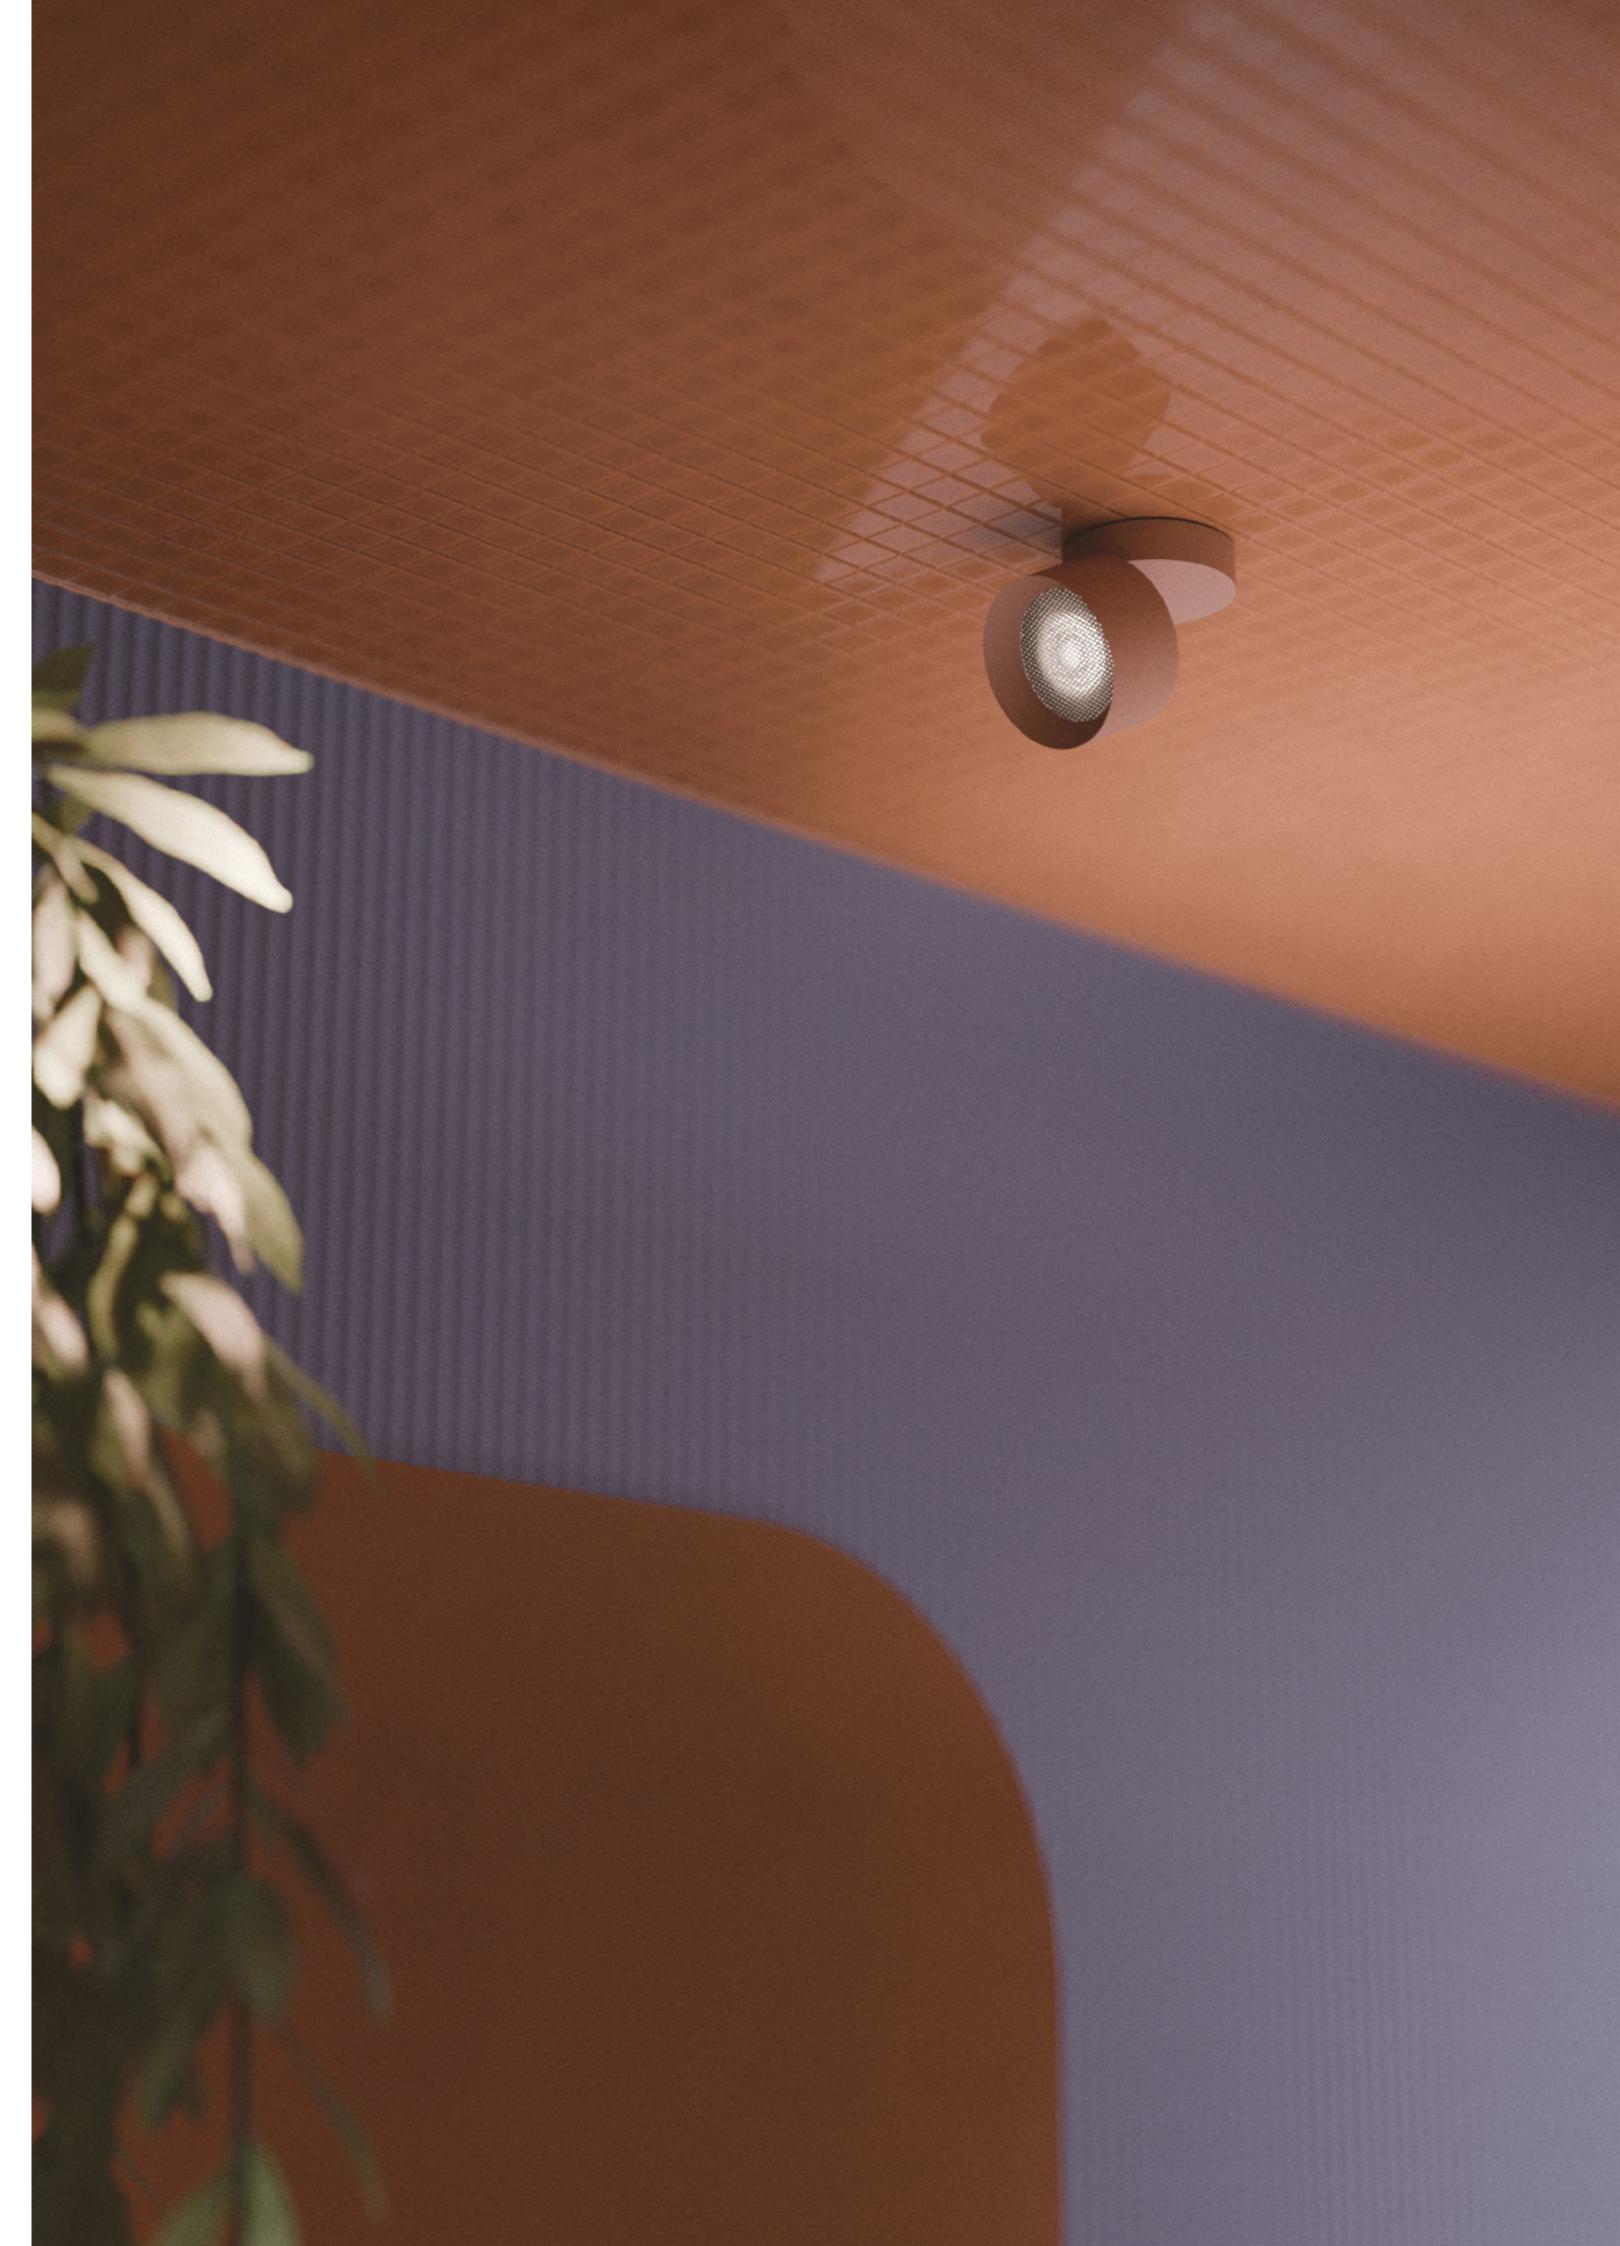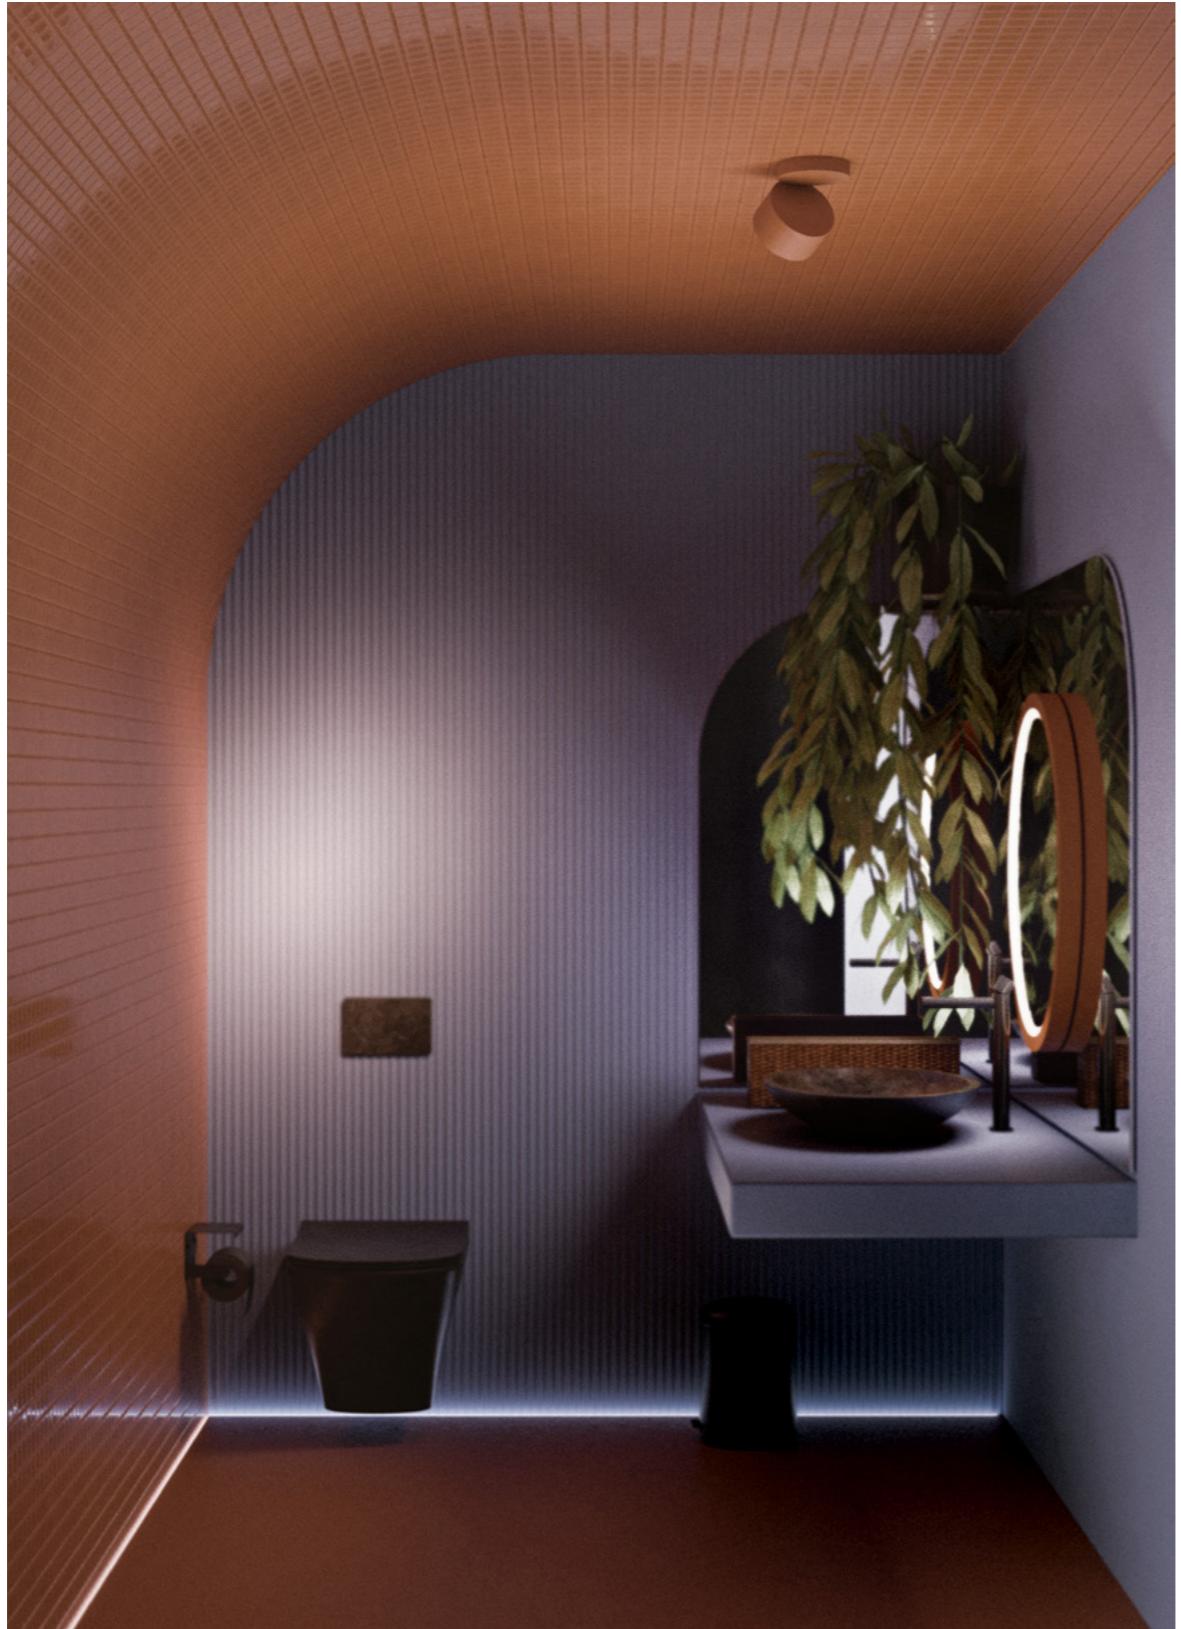

PM 111_on mov



Luminary Luminária

- L70 > 35000h
- MacAdam 3

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
2259.927013HCx	15W	HC36°	90	2700K	1020Lm	68Lm/W
2259.930013HCx	15W	HC36°	90	3000K	1084Lm	73Lm/W

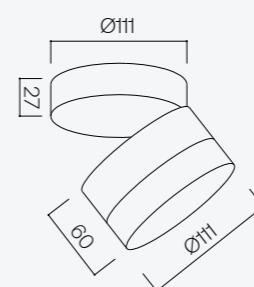


PM 111_p on



134 — Pendant



PM 111_p on



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3
- UGR <19

Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
- Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Ask for recessed base.
Base de empotrar, consultar.

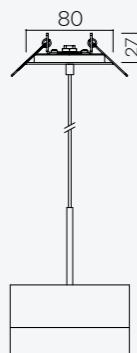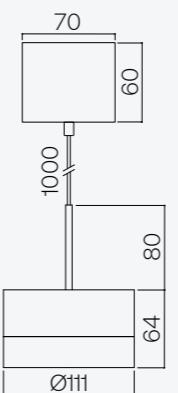

PM 111_trk mag

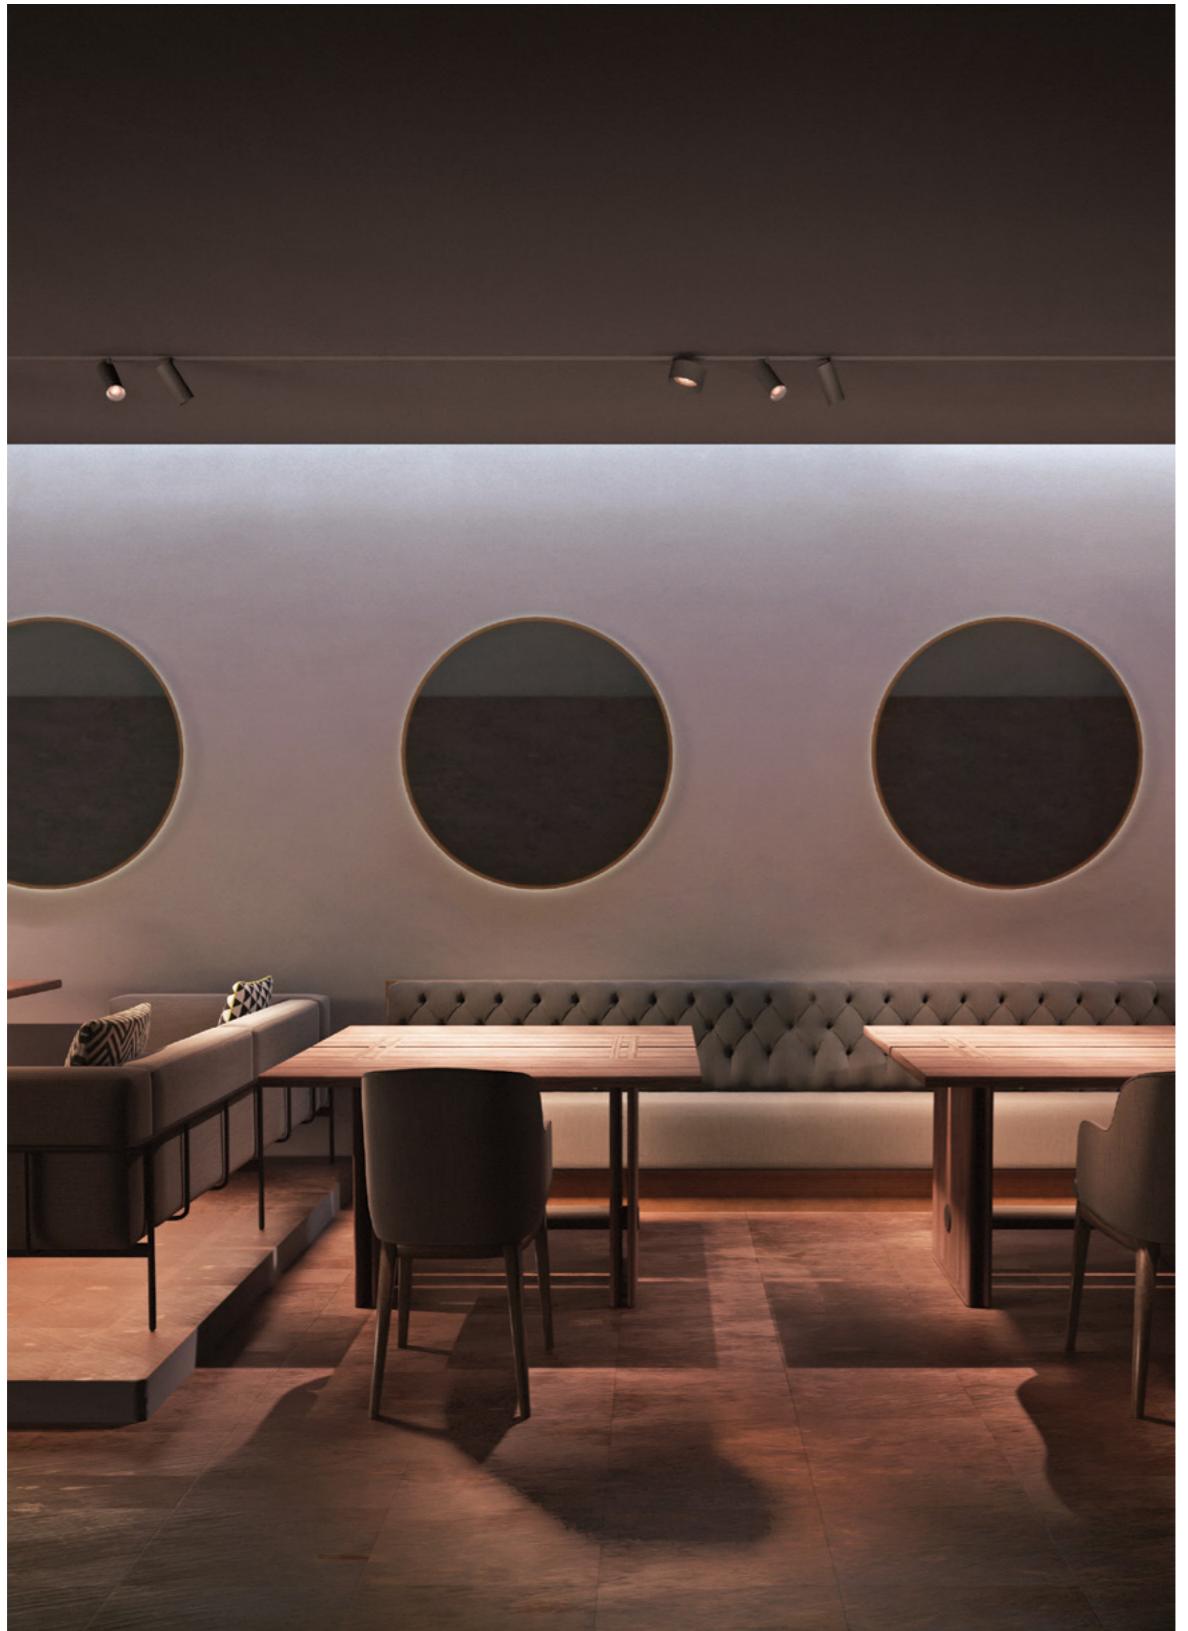

PM 111_trk mag



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Cod.

W

Beam angle

CRI

K

Lm

Efficience

Cod.	W	Beam angle	CRI	K	Lm	Efficience
6211.927018HAx	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
6211.927018HCx	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
6211.930018HAx	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
6211.930018HCx	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
6211.940018HAx	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
6211.940018HCx	20,7W	HC36°	90	4000K	1698Lm	82Lm/W

Driver

- Integrated - Integrado

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS


- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril


Downloads Descargas

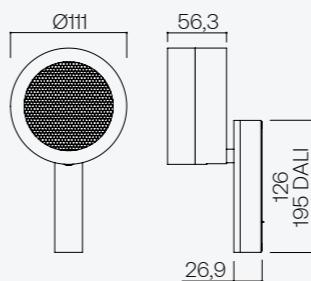

PM 111_trk 230V



PM 111_trk 230V



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Cod.

W

Beam angle

CRI

K

Lm

Efficience

Cod.	W	Beam angle	CRI	K	Lm	Efficience
6210.927018HAx	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
6210.927018HCx	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
6210.930018HAx	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
6210.930018HCx	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
6210.940018HAx	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
6210.940018HCx	20,7W	HC36°	90	4000K	1698Lm	82Lm/W

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS


- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Downloads Descargas

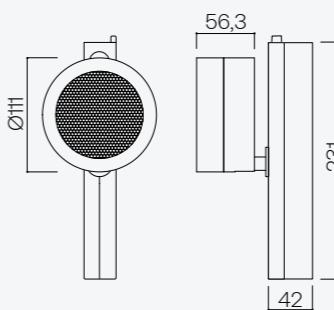

HALO

by Bruno de Avila



Recessed

40_in fix p. 160 73_in fix p. 164


In Halo we have achieved a fusion of elegance and functionality.

A minimalist design that blends perfectly with the ceiling.

*En Halo hemos conseguido aunar la elegancia y la funcionalidad.
Un diseño minimalista que se fusiona de manera perfecta con el techo.*



HALO 40_in fix

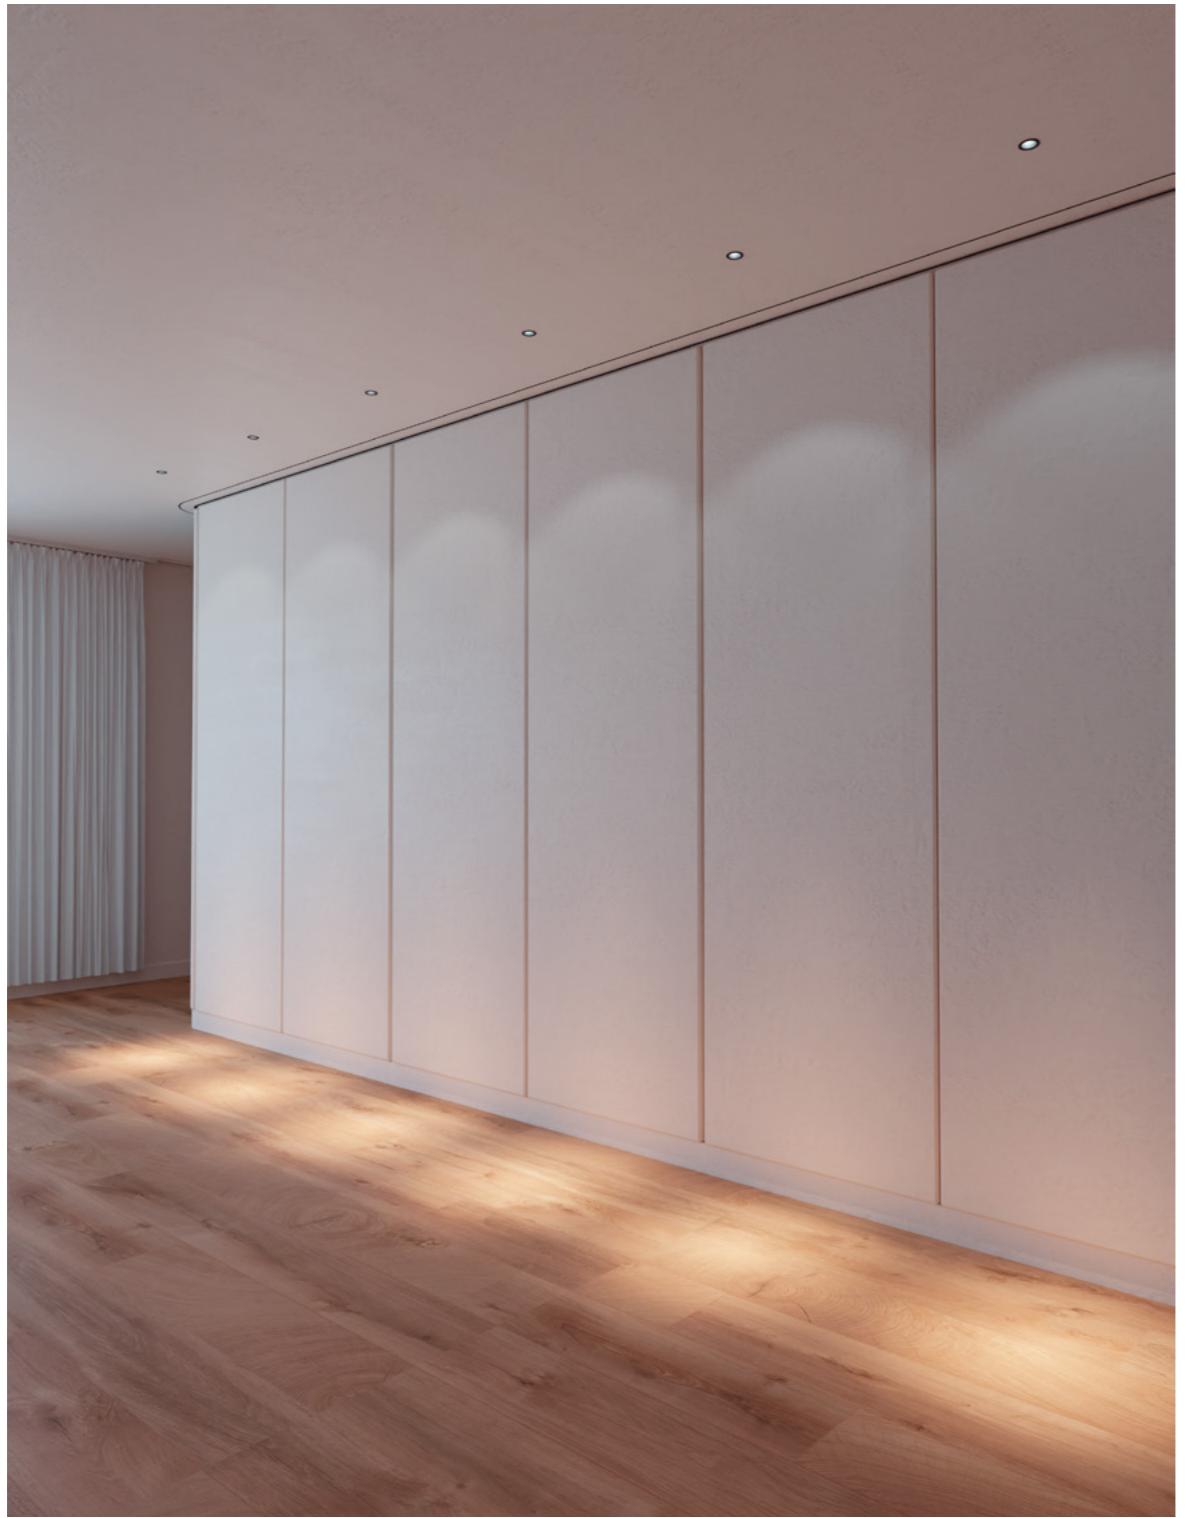

Halo is completely integrated into the space, creating an atmosphere where light is the main protagonist.

Halo se integra completamente en el espacio, creando un ambiente donde el gran protagonista es la luz.



HALO 40_in fix



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- Transparent glass
Cristal transparente

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.


Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2253.I27007H1.x	8,2W	HC10°	95	2700K	527Lm	65Lm/W
2253.I27007HAx	8,2W	HC15°	95	2700K	527Lm	65Lm/W
2253.I27007HBx	8,2W	HC24°	95	2700K	527Lm	65Lm/W
2253.I27007HCx	8,2W	HC36°	95	2700K	527Lm	65Lm/W
2253.I27007H5.x	8,2W	HC50°	95	2700K	527Lm	65Lm/W
2253.I30007H1.x	8,2W	HC10°	95	3000K	547Lm	67Lm/W
2253.I30007HAx	8,2W	HC15°	95	3000K	547Lm	67Lm/W
2253.I30007HBx	8,2W	HC24°	95	3000K	547Lm	67Lm/W
2253.I30007HCx	8,2W	HC36°	95	3000K	547Lm	67Lm/W
2253.I30007H5.x	8,2W	HC50°	95	3000K	547Lm	67Lm/W
2253.I40007H1.x	8,2W	HC10°	95	4000K	574Lm	70Lm/W
2253.I40007HAx	8,2W	HC15°	95	4000K	574Lm	70Lm/W
2253.I40007HBx	8,2W	HC24°	95	4000K	574Lm	70Lm/W
2253.I40007HCx	8,2W	HC36°	95	4000K	574Lm	70Lm/W
2253.I40007H5.x	8,2W	HC50°	95	4000K	574Lm	70Lm/W

Tunable White

2253.TWB005HA.x	6,2W	HC15°	90	1800-4000K	275-450Lm	45-73Lm/W
2253.TWB005HB.x	6,2W	HC24°	90	1800-4000K	275-450Lm	45-73Lm/W
2253.TWB005HC.x	6,2W	HC36°	90	1800-4000K	275-450Lm	45-73Lm/W
2253.TWB005H5.x	6,2W	HC50°	90	1800-4000K	275-450Lm	45-73Lm/W




HALO 73_in fix


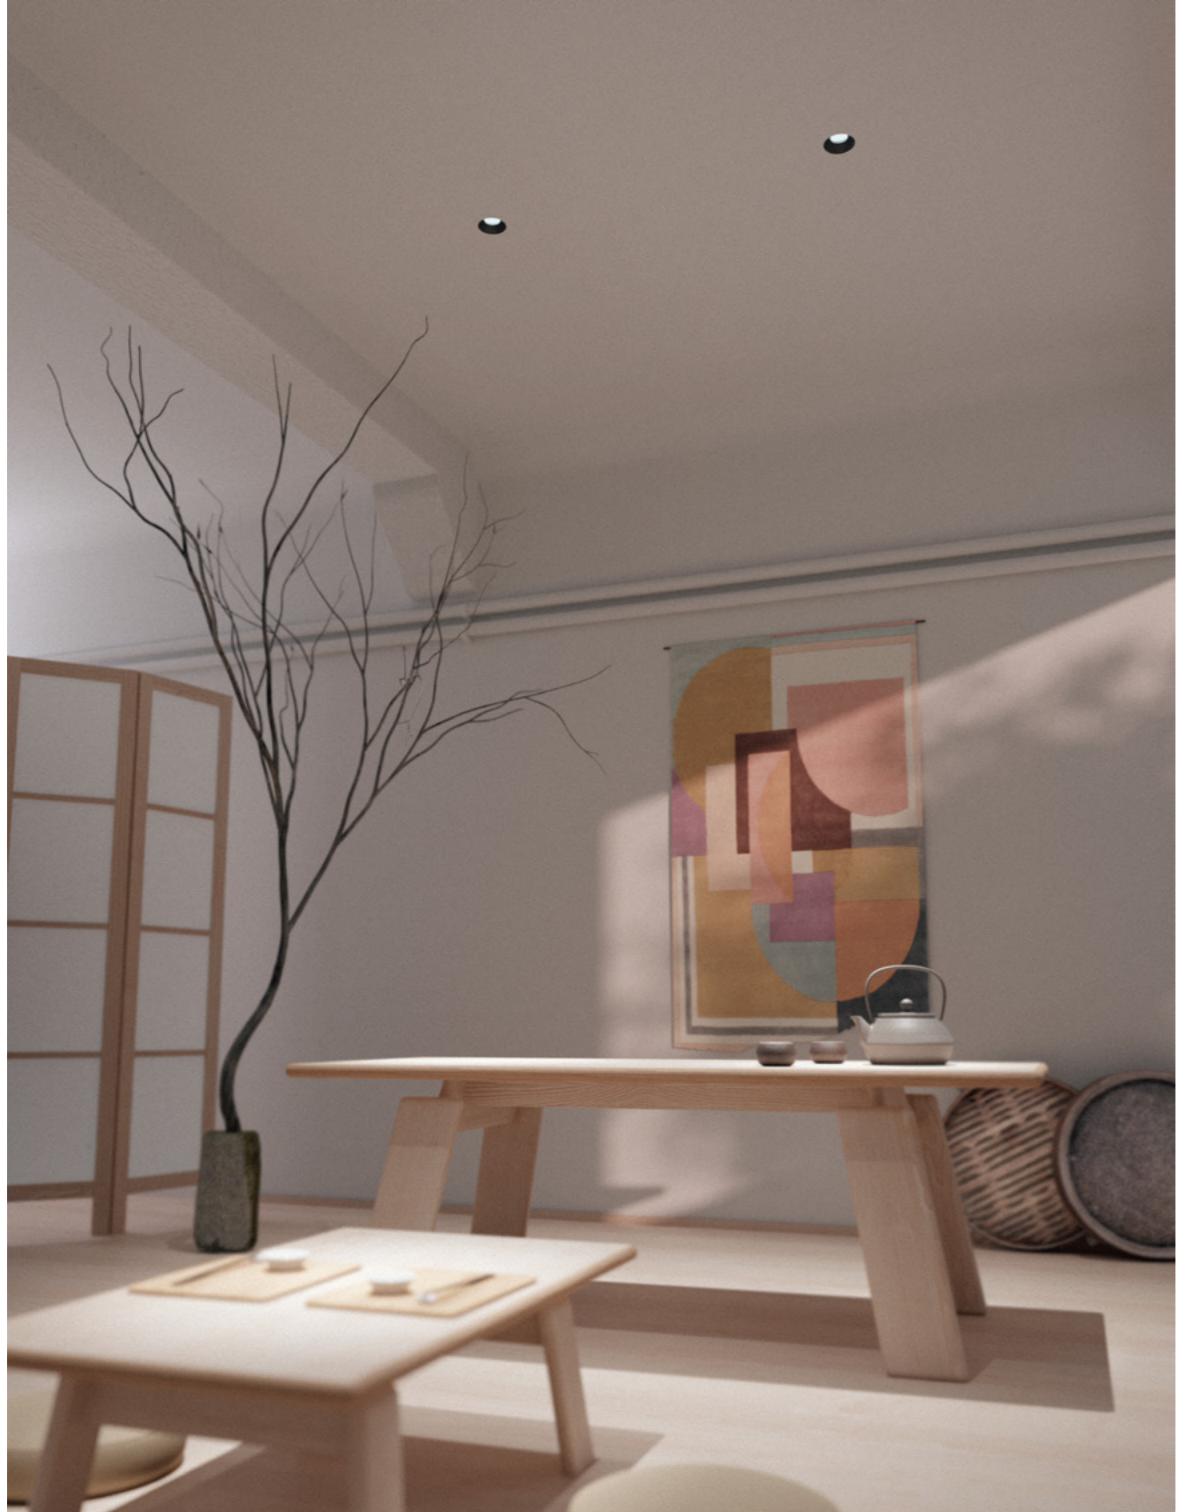


The Halo 73 combines exceptional lighting performance in a compact luminaire that can be integrated subtly into the architecture.

El modelo Halo 73 une un excepcional rendimiento lumínico en una luminaria compacta de integración sutil dentro de la arquitectura.

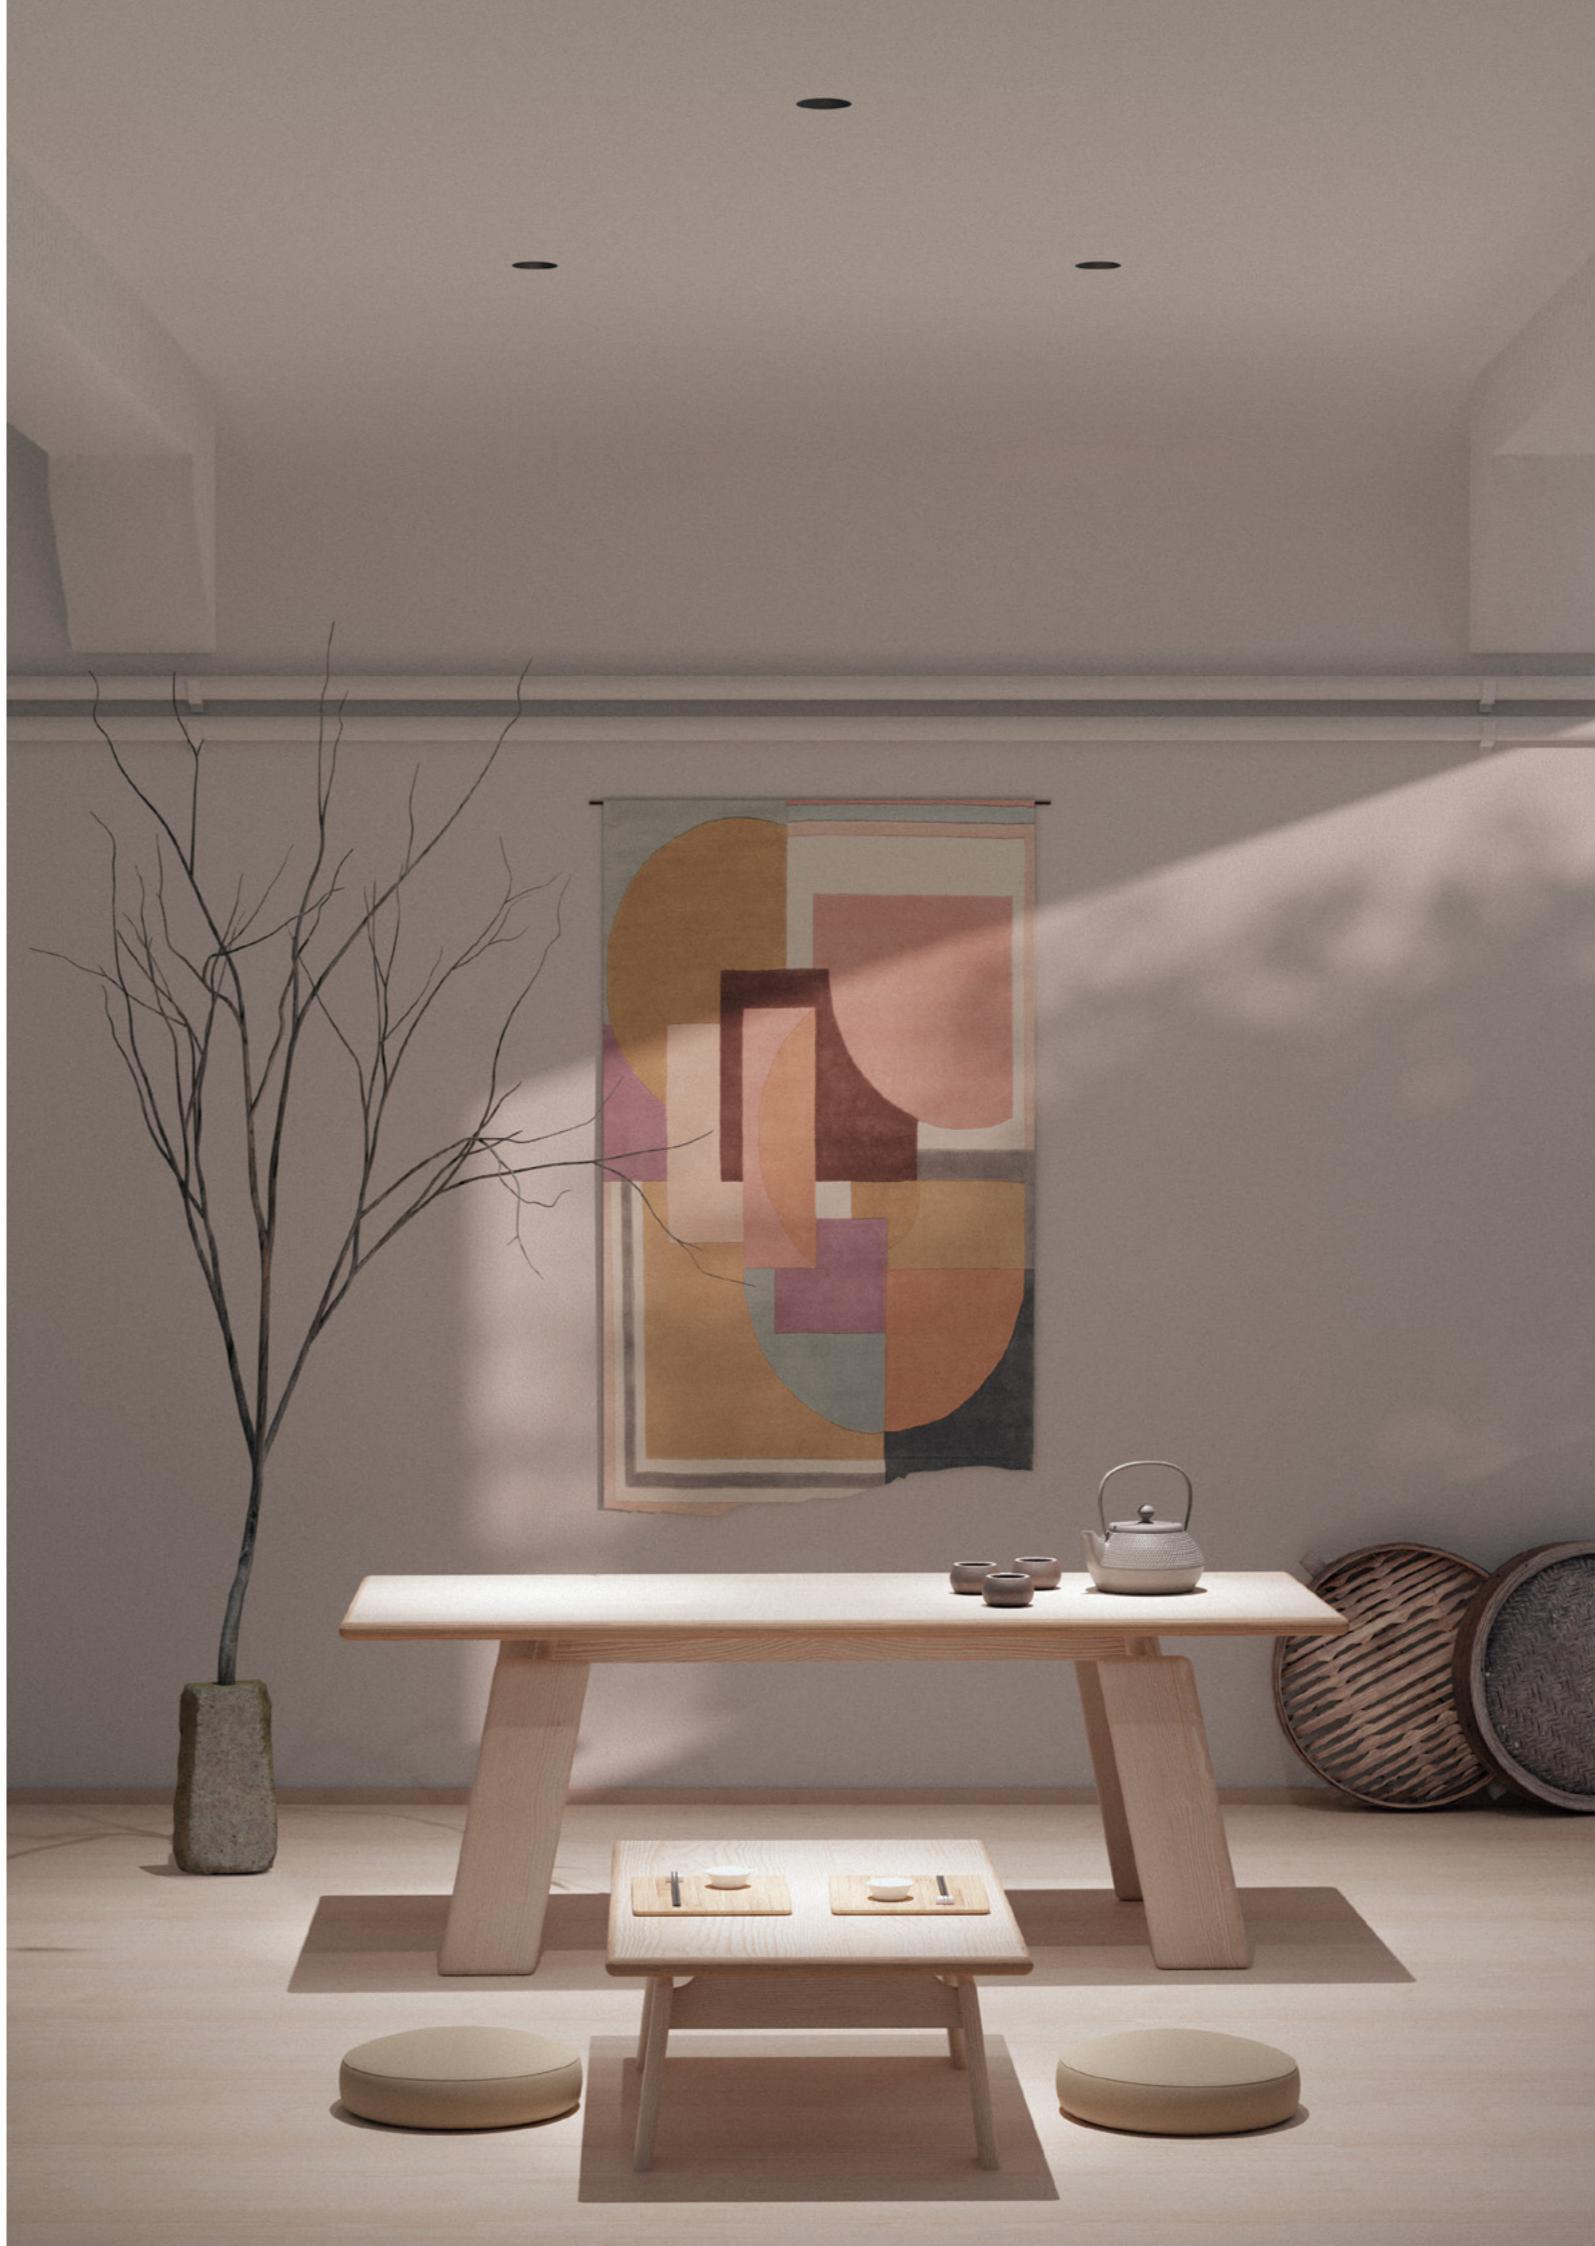

HALO 73_in fix

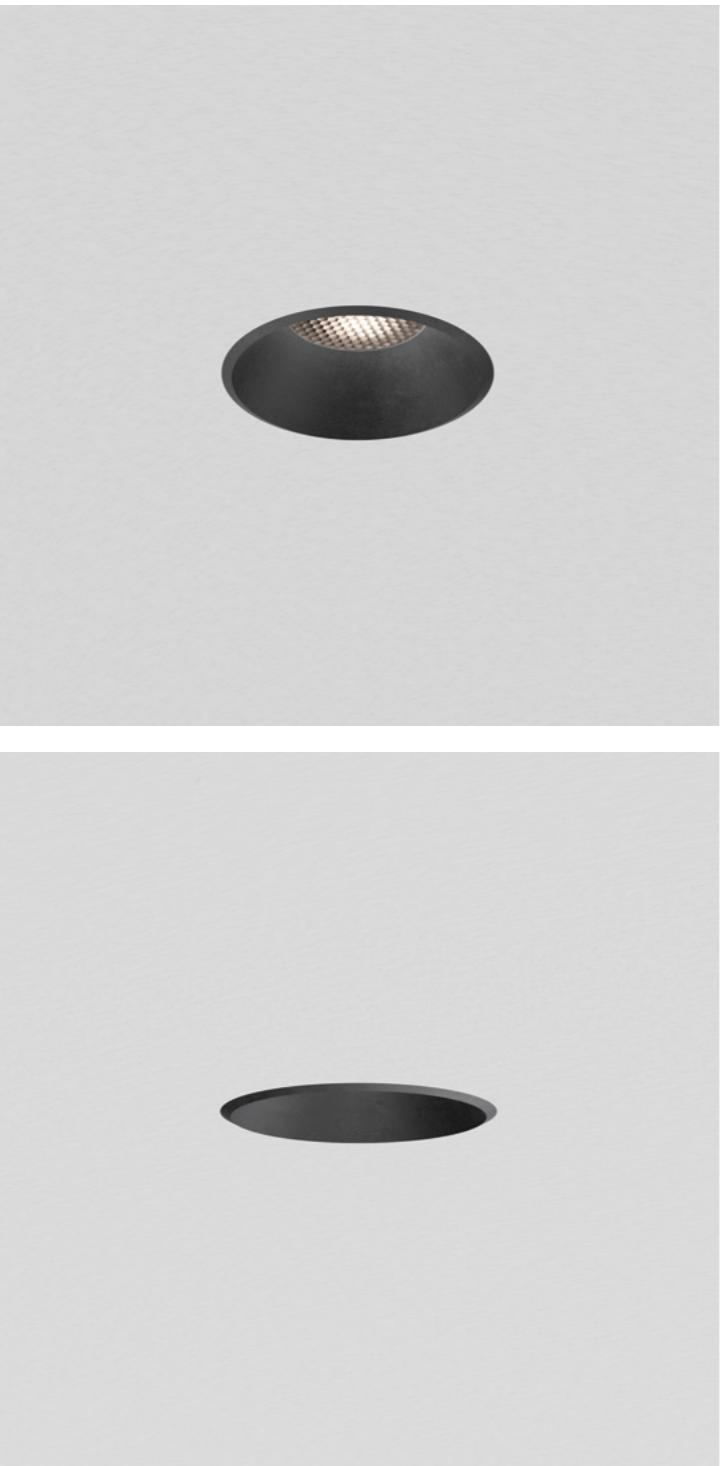

Luminary

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- Transparent glass
Cristal transparent
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2248.927009H2x	10,3W	HC20°	90	2700K	683Lm	67Lm/W
2248.927009H4x	10,3W	HC40°	90	2700K	683Lm	67Lm/W
2248.927009H6x	10,3W	HC60°	90	2700K	683Lm	67Lm/W
2248.930009H2x	10,3W	HC20°	90	3000K	779Lm	76Lm/W
2248.930009H4x	10,3W	HC40°	90	3000K	779Lm	76Lm/W
2248.930009H6x	10,3W	HC60°	90	3000K	779Lm	76Lm/W
2248.940009H2x	10,3W	HC20°	90	4000K	870Lm	85Lm/W
2248.940009H4x	10,3W	HC40°	90	4000K	870Lm	85Lm/W
2248.940009H6x	10,3W	HC60°	90	4000K	870Lm	85Lm/W
2248.927012HBx	13,6W	HC25°	90	2700K	1080Lm	80Lm/W
2248.927012HDx	13,6W	HC43°	90	2700K	1080Lm	80Lm/W
2248.927012H6x	13,6W	HC60°	90	2700K	1080Lm	80Lm/W
2248.930012HBx	13,6W	HC25°	90	3000K	1217Lm	90Lm/W
2248.930012HDx	13,6W	HC43°	90	3000K	1217Lm	90Lm/W
2248.930012H6x	13,6W	HC60°	90	3000K	1217Lm	90Lm/W
2248.940012HBx	13,6W	HC25°	90	4000K	1318Lm	97Lm/W
2248.940012HDx	13,6W	HC43°	90	4000K	1318Lm	97Lm/W
2248.940012H6x	13,6W	HC60°	90	4000K	1318Lm	97Lm/W

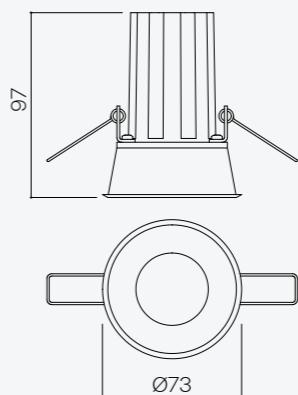

NIO

by Her design team



Recessed

3x1_in p. 158 2x2_in p. 160 5x1_in p. 162 3x3_in p. 164


Surface

2x2_on p. 168 3x3_on p. 170

The NIO collection achieves an unparalleled visual comfort, a glare-free design, creating a warm and comfortable atmosphere.

La colección NIO consigue un confort visual sin igual, un diseño que elimina los brillos y creando un ambiente cálido y confortable.

NIO_in 3x1

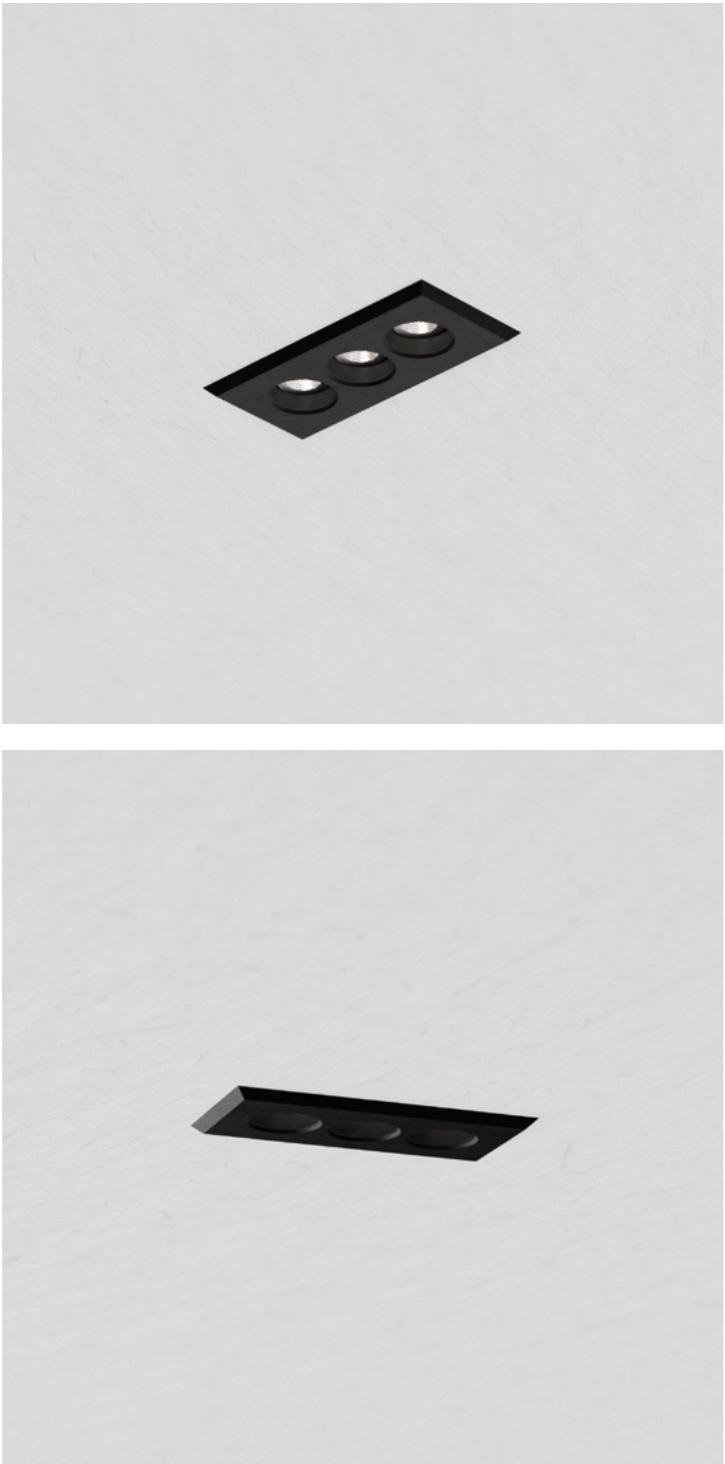

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP65

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava



Downloads Descargas




Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
E431.92700437.x	5,1W	37°	90	2700K	225Lm	45Lm/W
E431.93000437.x	5,1W	37°	90	3000K	240Lm	48Lm/W

E431.92700437.x	5,1W	37°	90	2700K	225Lm	45Lm/W
E431.93000437.x	5,1W	37°	90	3000K	240Lm	48Lm/W

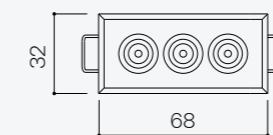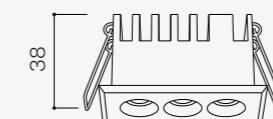

NIO_in 2x2

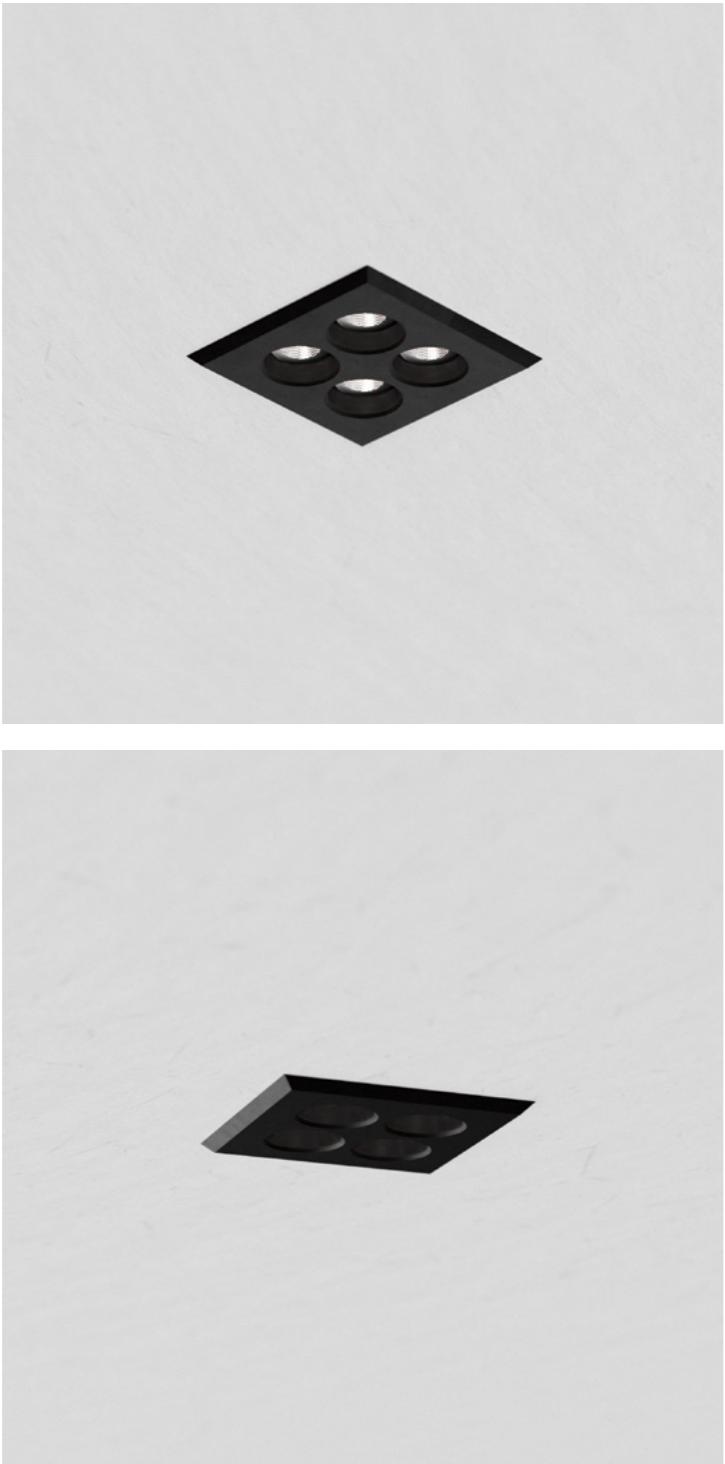

160 — Recessed

Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP65

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

E422.92700637.x

W

6,9W

Beam angle

37°

CRI

90

K

2700K

Lm

315Lm

Efficience

46Lm/W

E422.93000637.x

6,9W


37°

90


3000K

330Lm

48Lm/W

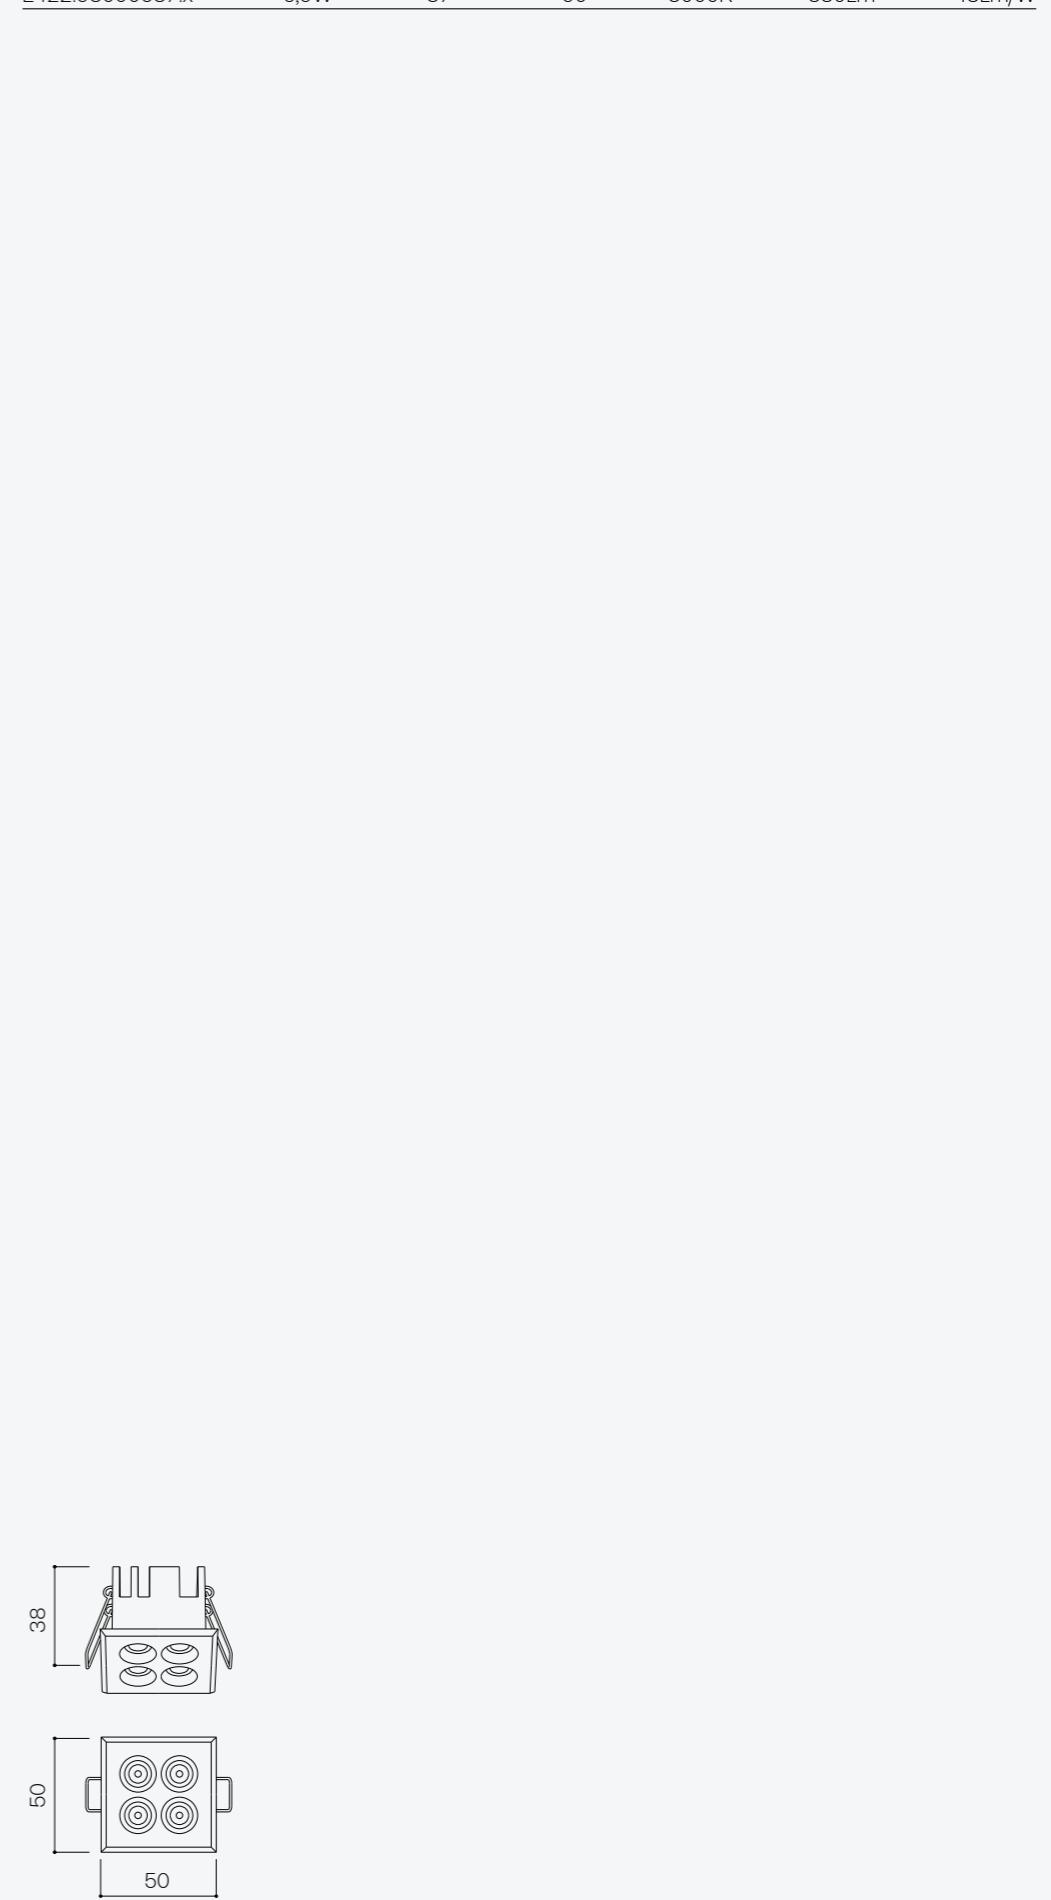

NIO_in 5x1

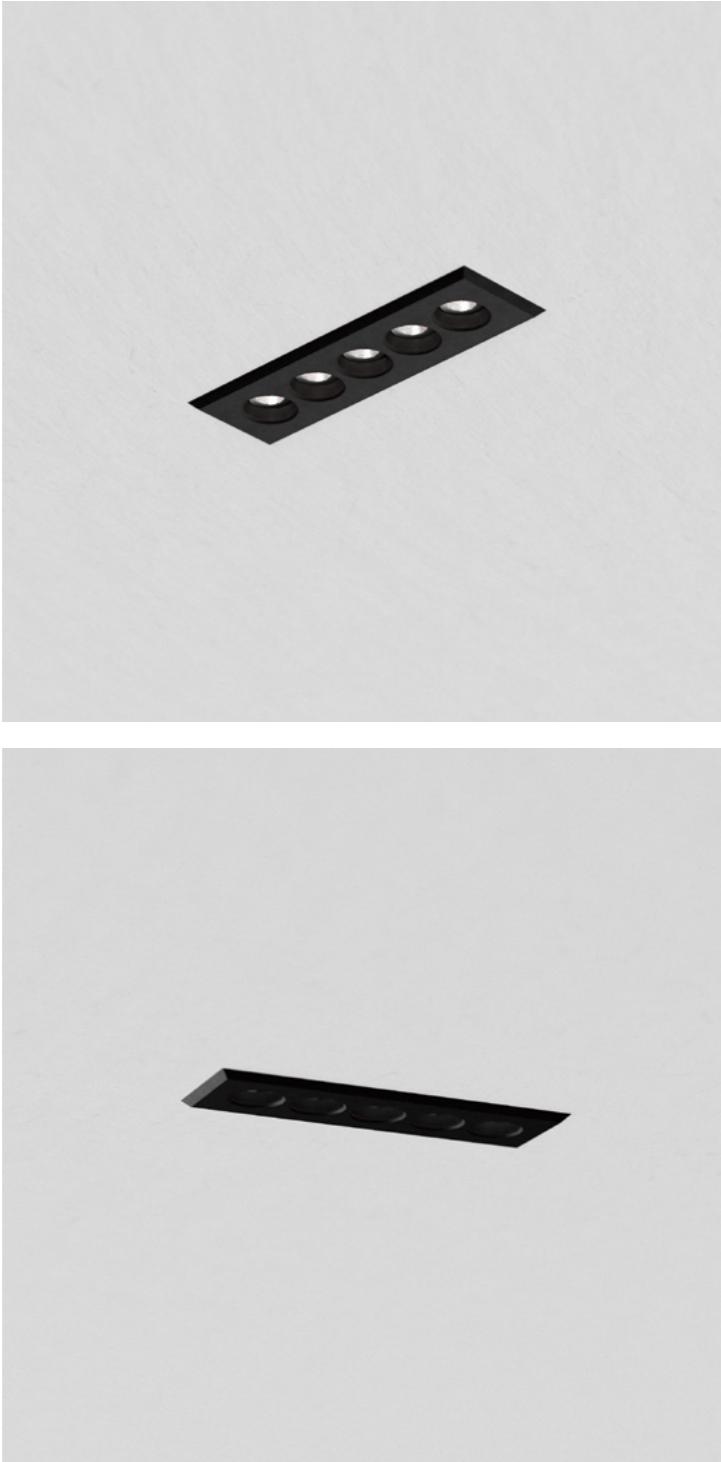

162 — Recessed

Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP65

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

E451.92700737.x

W

8,6W

Beam angle

37°

CRI

90

K

2700K

Lm

385Lm

Efficience

45Lm/W

E451.93000737.x

8,6W

37°

90



3000K

405Lm

48Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficience
E451.92700737.x	8,6W	37°	90	2700K	385Lm	45Lm/W
E451.93000737.x	8,6W	37°	90	3000K	405Lm	48Lm/W

NIO_in 3x3

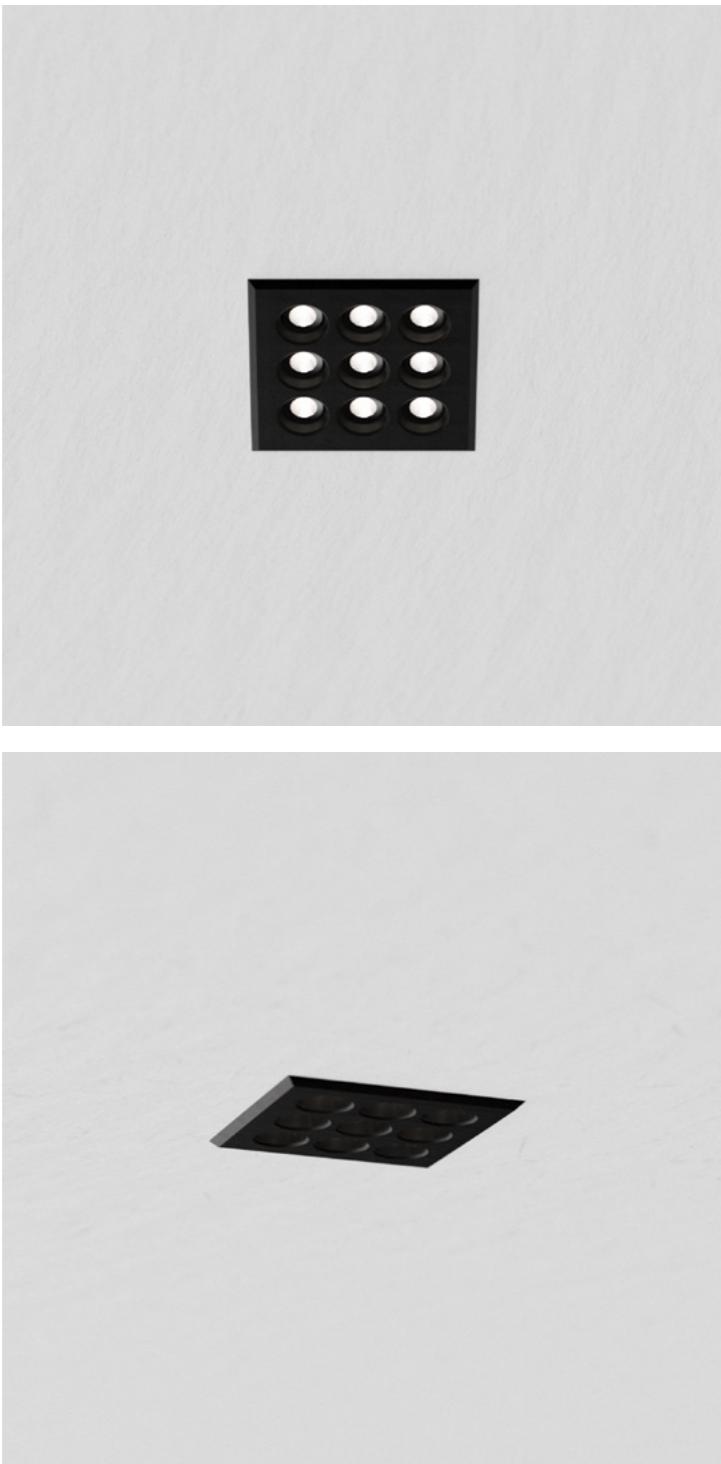

Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP65

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
E433.92701137.x	12,4W	37°	90	2700K	525Lm	43Lm/W
E433.93001137.x	12,4W	37°	90	3000K	555Lm	45Lm/W

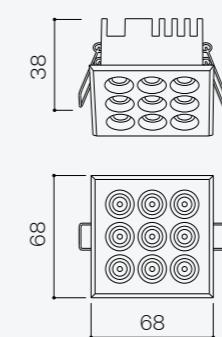

NIO_on

by Her design team



A colourful and different approach to provide
an innovative surface lighting solution.

*Una apuesta colorida y diferente para aportar una
solución innovadora de iluminación de superficie.*



NIO_on 2x2



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP54

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W

S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W

</tbl

NIO_on 3x3



Luminary

- Luminária**
 • L70 > 50000h
 • MacAdam 3
 • UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP54

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040x	11,3W	40°	90	3000K	785Lm	70Lm/W

S433.92701040x	11,3W	40°	90	2700K	750Lm	67Lm/W

<tbl_r cells="7" ix="2" maxcspan="1" max

PM 60_on fix gu10

by eng



PM 60_on fix gu10



GU10 Bulb not included
Bombilla GU10 no incluida
(MR16/GU10 - Ø50 mm)

Voltage Voltaje
• 220-240VAC

Cod.
2266.00000000x

Driver
• Not included

Protection Protección
• IP20


Basic finishes
Acabados básicos
● Black
○ White

Special finishes
Acabados especiales

NCS
● Oliva - S 7010-G30Y
● Ocre - S 5040-Y70R
● Terracota - S 3050-Y60R
● Mocha - S 5010-Y10R
● Sand - S 2005-Y50R

Metallic Metálico
● Gun Metal
● Bronze
● Brushed Copper
● Old Silver
● Cava

Downloads Descargas

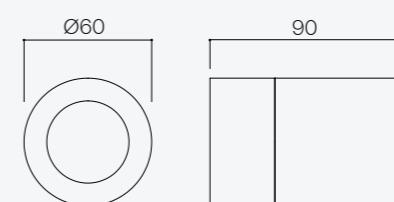


PL 80_in fix e27

by eng



PL 80_in fix e27

by eng

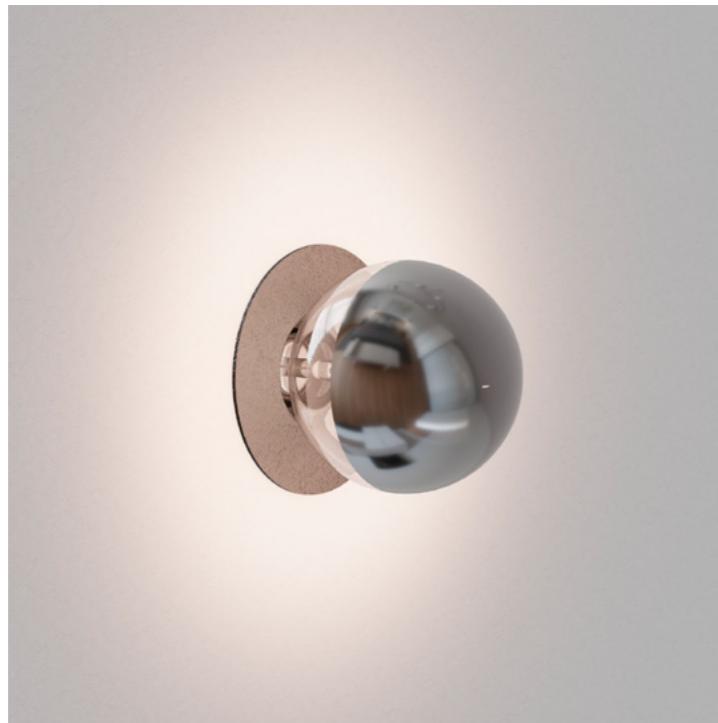

E27 Bulb not included
Bombilla E27 no incluida

Voltage Voltaje
• 220-240VAC

Cod.
2228.00000000x

Driver
• Not included

Protection Protección
• IP20


Basic finishes
Acabados básicos
● Black
○ White

Special finishes
Acabados especiales


NCS
● Oliva - S 7010-G30Y
● Ocre - S 5040-Y70R
● Terracota - S 3050-Y60R
● Mocha - S 5010-Y10R
● Sand - S 2005-Y50R

Metallic Metálico
● Gun Metal
● Bronze
● Brushed Copper
● Old Silver
● Cava

Downloads Descargas

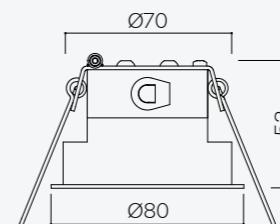



NIK

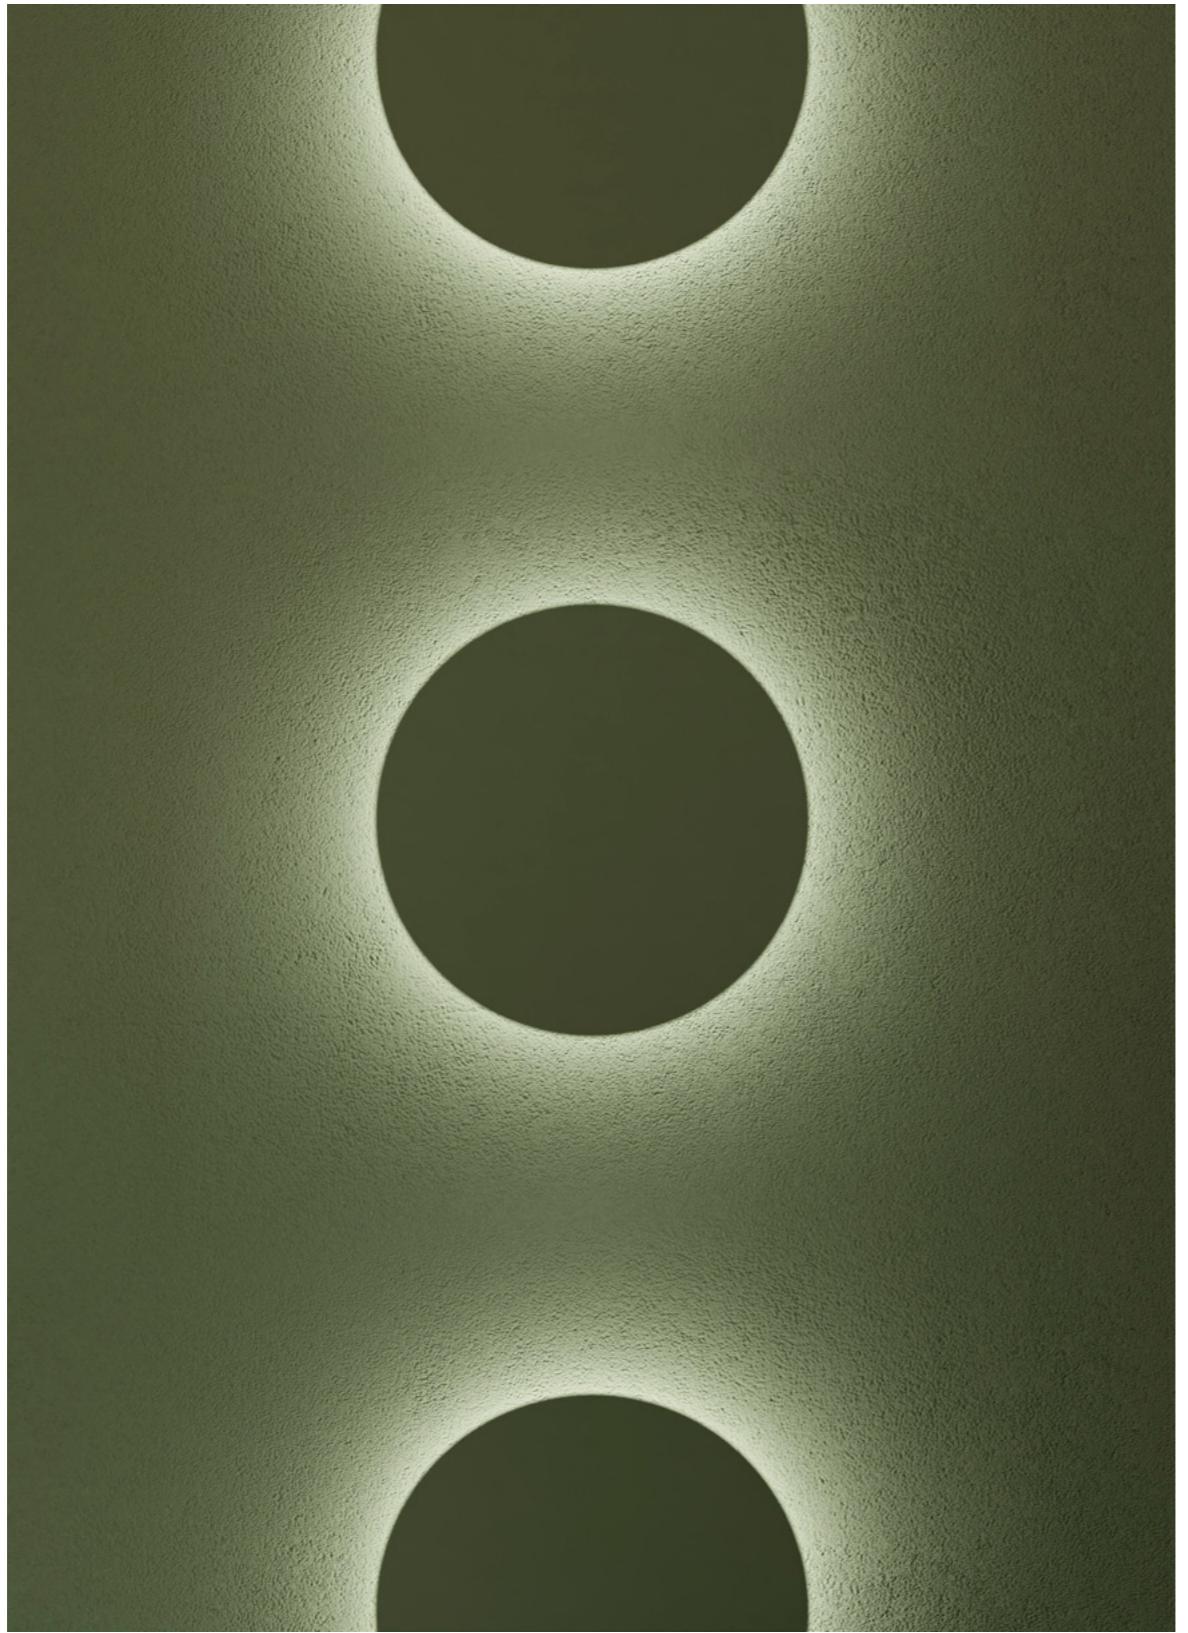

180 — Surface



Nik

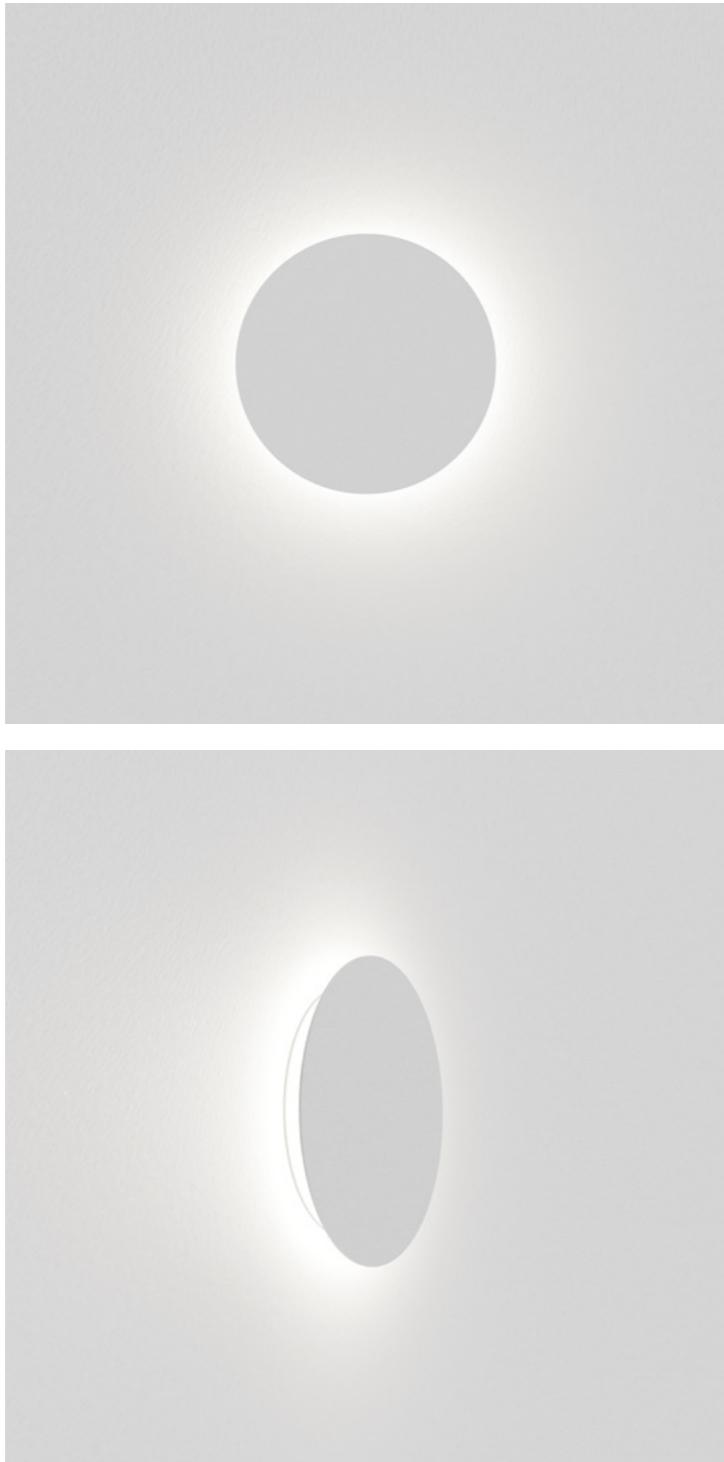

Luminary

- L70 > 50000h
- MacAdam 3

Optic Óptica

- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2263.927002AZ.x	2,4W	360°	90	2700K	106Lm	45Lm/W
2263.930002ZZ.x	2,4W	360°	90	3000K	111Lm	47Lm/W
2263.940002AZ.x	2,4W	360°	90	4000K	114Lm	48Lm/W

*on demand



DOT_trk mag



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3
- UGR <19

Cod.

	W	Beam angle	CRI	K	Lm	Efficience
6204.92701214x	3x4,8W	14°	90	2700K	3x350Lm	73Lm/W
6204.92701239x	3x4,8W	39°	90	2700K	3x350Lm	73Lm/W
6204.93001214x	3x4,8W	14°	90	3000K	3x350Lm	73Lm/W
6204.93001239x	3x4,8W	39°	90	3000K	3x350Lm	73Lm/W

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS



- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Downloads Descargas

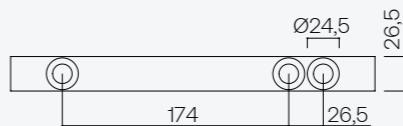

Structure

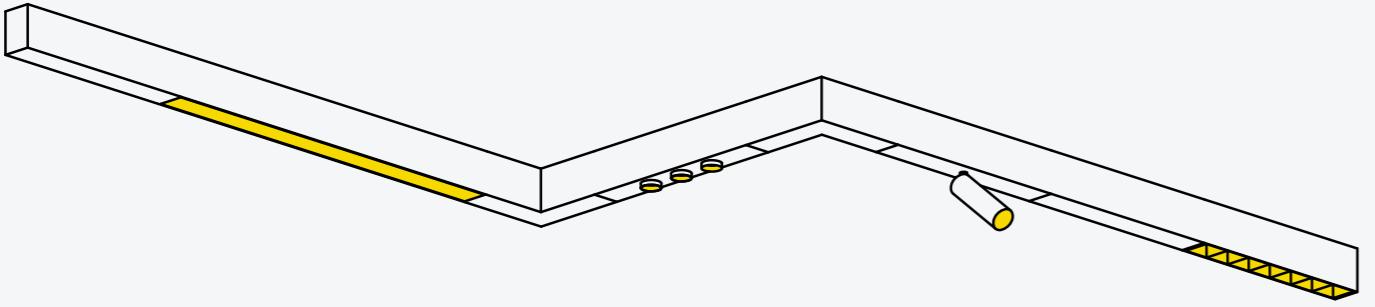


DESCRIPTION


With a vast array of design options at your fingertips, from corner profiles to recessed, surface, and pendant variations, you have the power to sculpt the atmosphere precisely to your vision.

DESCRIPCIÓN



Con una amplia gama de opciones de diseño a su alcance, desde perfiles de esquina hasta variaciones empotradas, de superficie y colgantes, tiene el poder de esculpir la atmósfera con precisión según su visión.

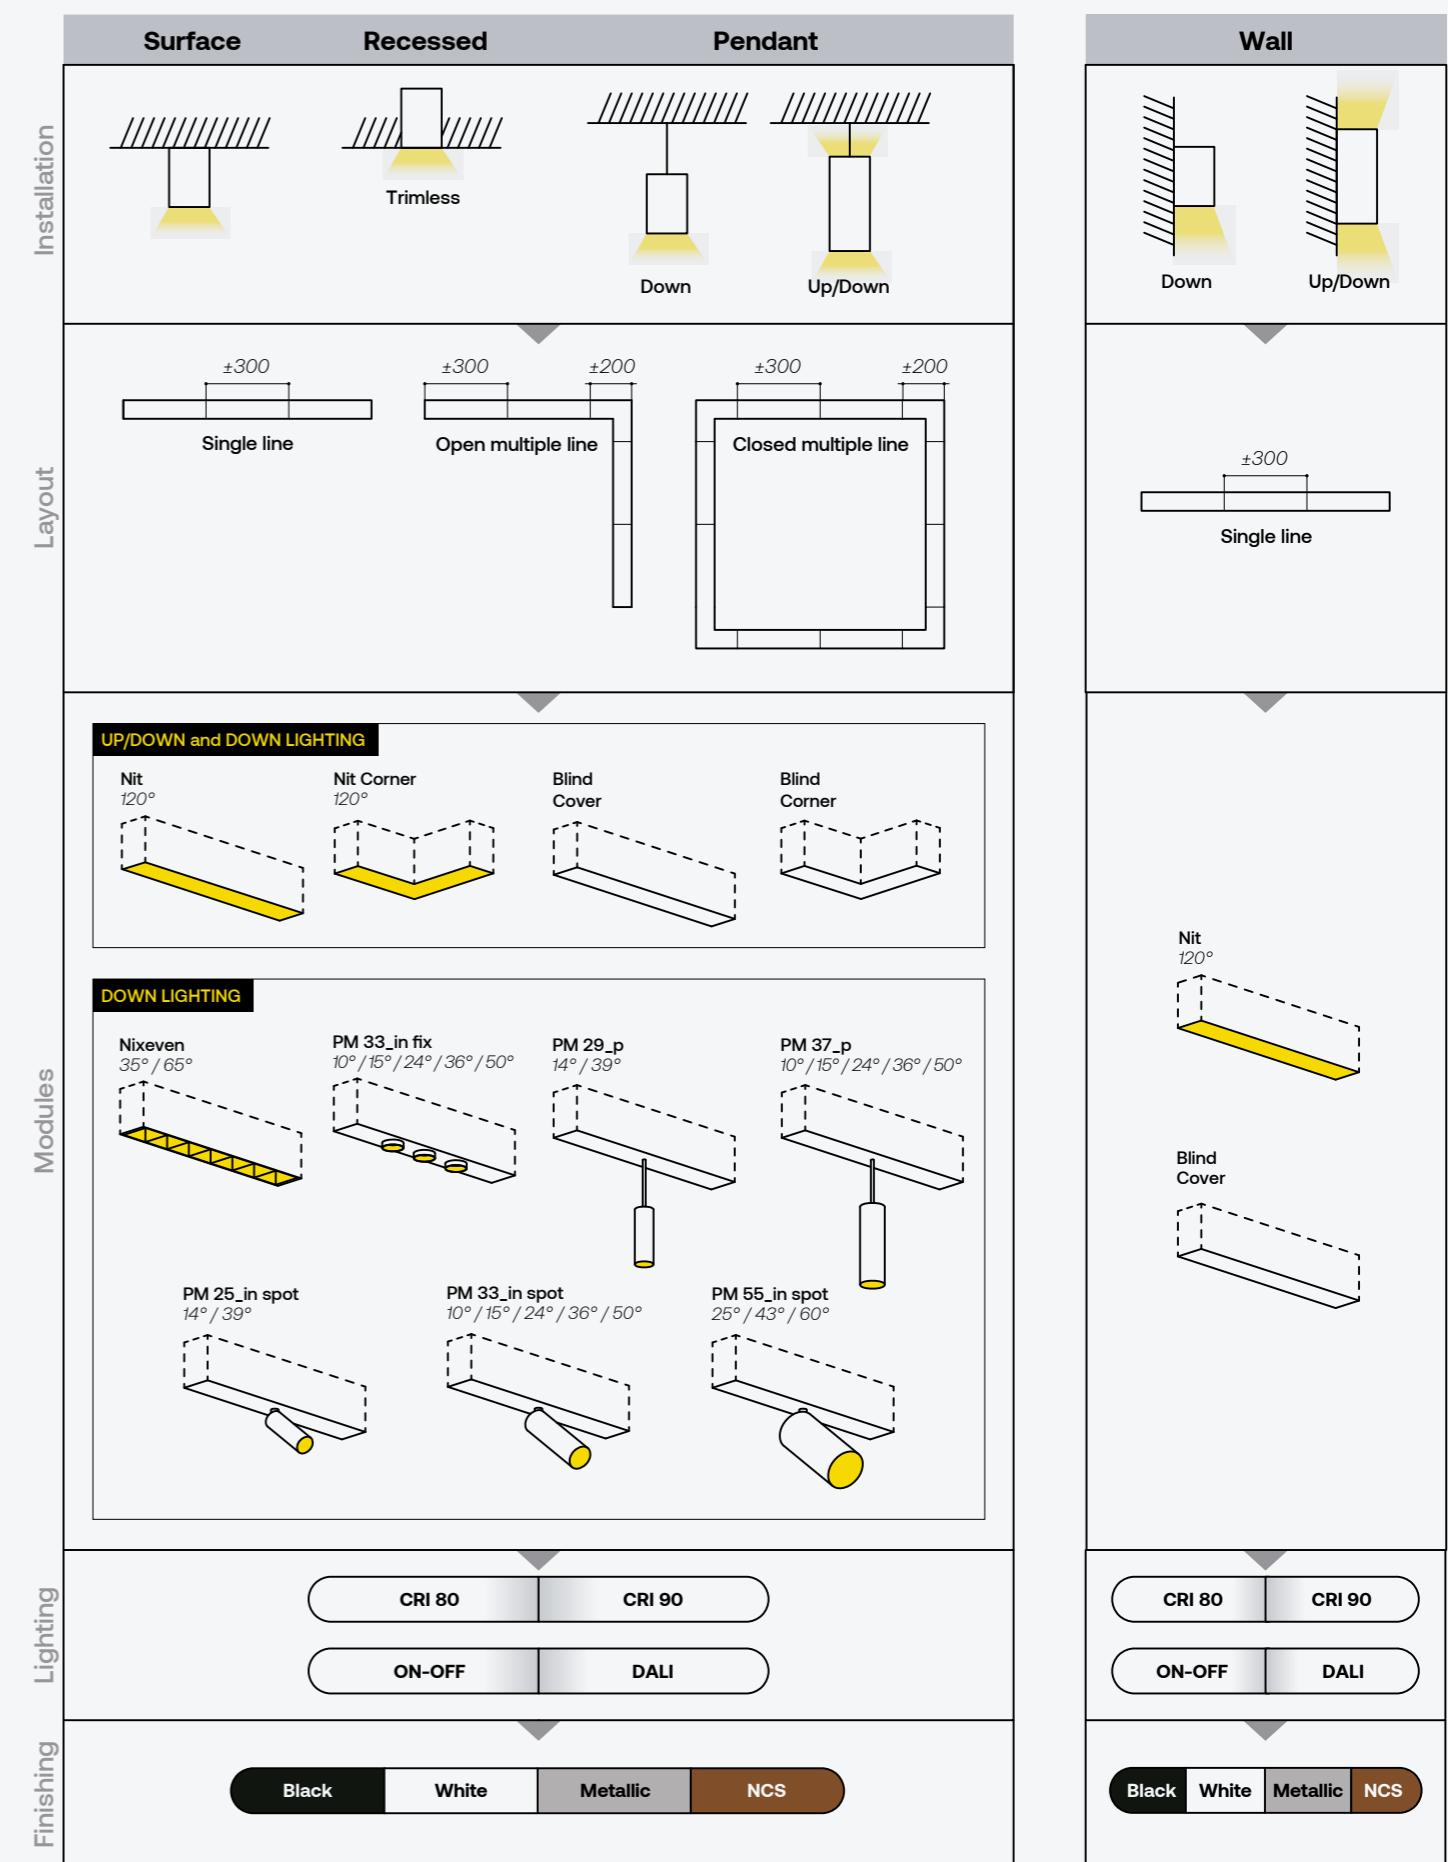

Nit Down Pendant

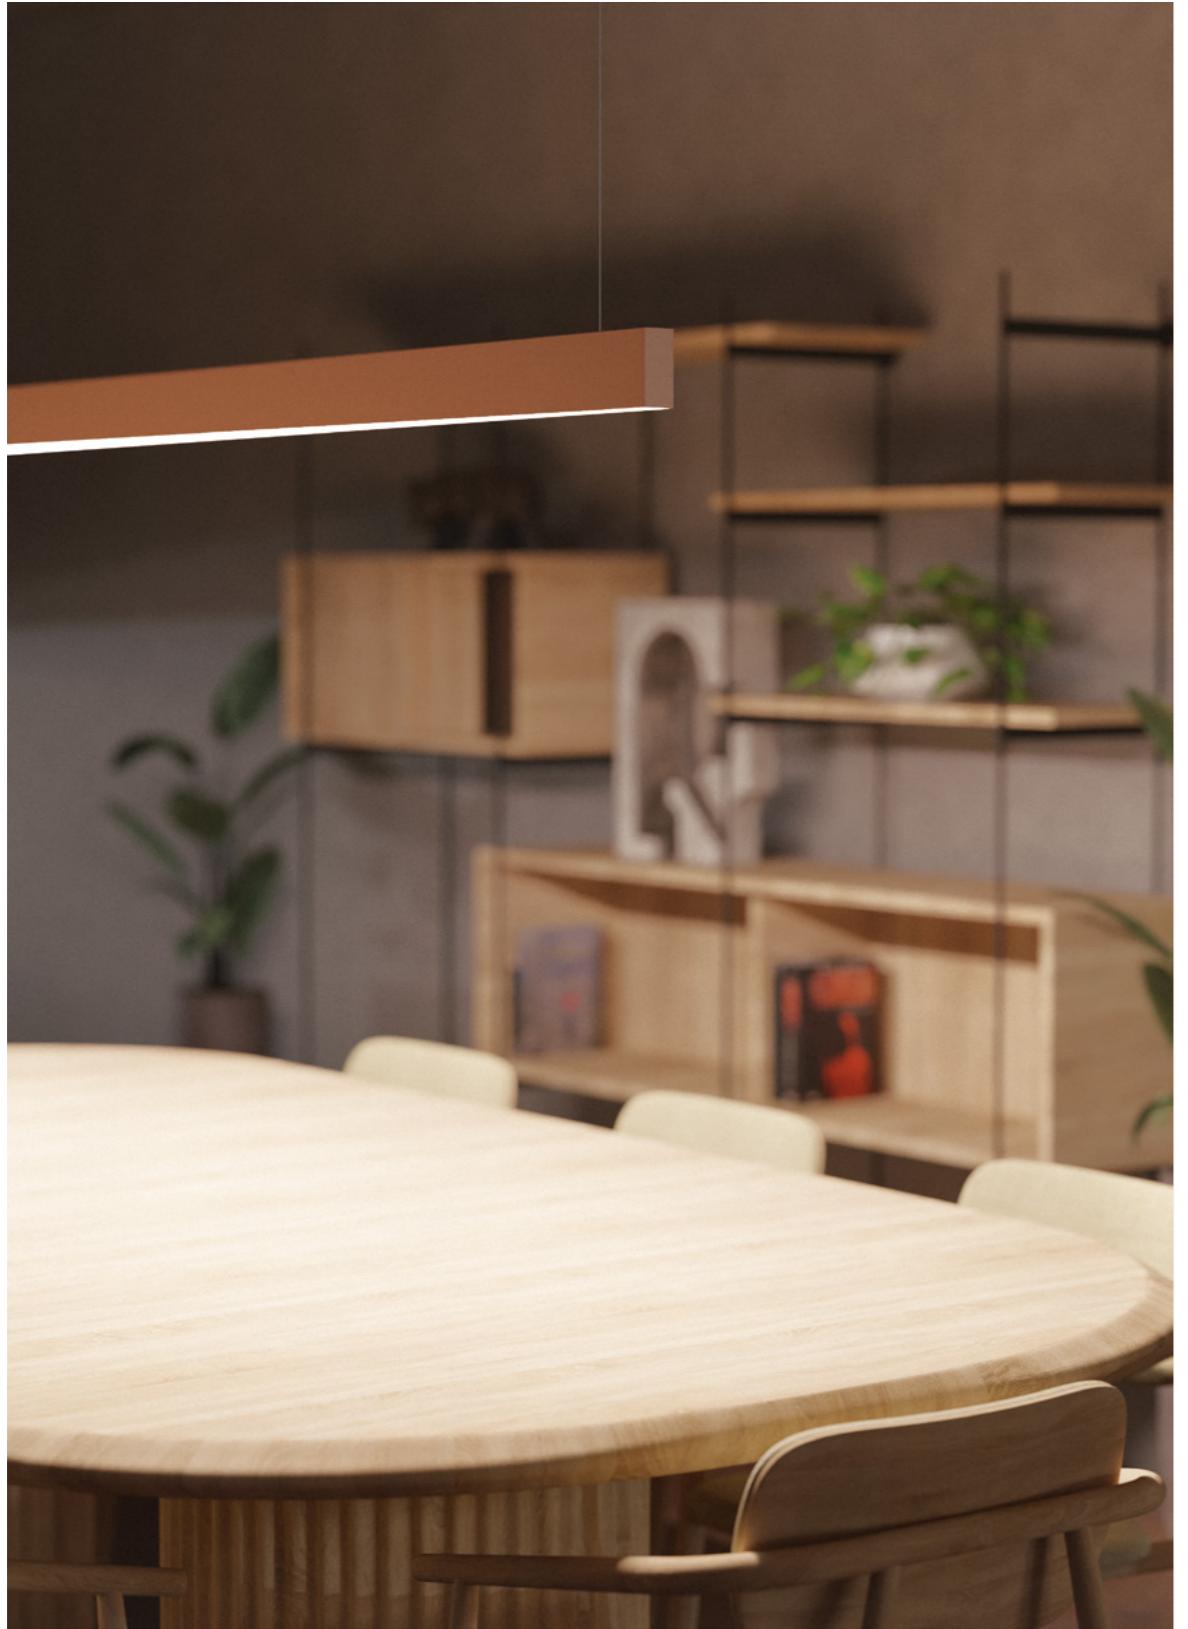

Nit Down Pendant

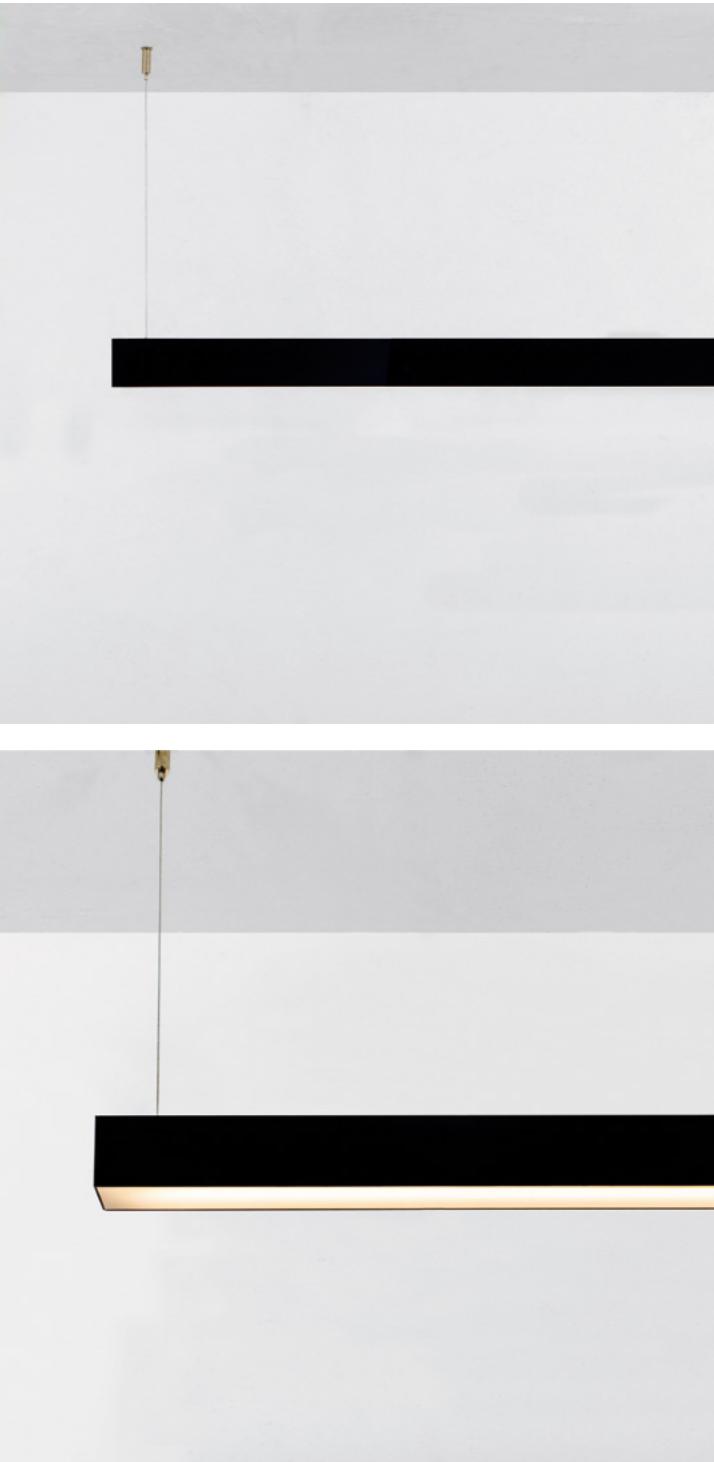

Luminary Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 4m cables
Cables de 4m
- 890-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes Acabados básicos

- Black
- White

Special finishes Acabados especiales

- NCS**
- Oliva - S 7010-G30Y
 - Ocre - S 5040-Y70R
 - Terracota - S 3050-Y60R
 - Mocha - S 5010-Y10R
 - Sand - S 2005-Y50R
- Metallic Metálico**
- Gun Metal
 - Bronze
 - Brushed Copper
 - Old Silver
 - Cava

Downloads Descargas



Cod.

Nit Down Pendant IND 330 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficience
C1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
C1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
C1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W

Nit Down Pendant IND 610 mm

C2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
C2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
C2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W

Nit Down Pendant IND 890 mm

C3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
C3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
C3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W

Nit Down Pendant IND 1170 mm

C4A0.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
C4A0.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
C4A0.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W

Nit Down Pendant IND 1450 mm

C5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
C5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
C5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W

Nit Down Pendant IND 1730 mm

C6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
C6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
C6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W

Nit Down Pendant IND 2010 mm

C7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
C7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
C7A0.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W

Nit Down Pendant IND 2290 mm


C8A0.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
C8A0.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
C8A0.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W

Nit Down Pendant IND 2570 mm



C9A0.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
C9A0.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
C9A0.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W

Nit Down Pendant IND 2850 mm

CXA0.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
CXA0.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
CXA0.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W

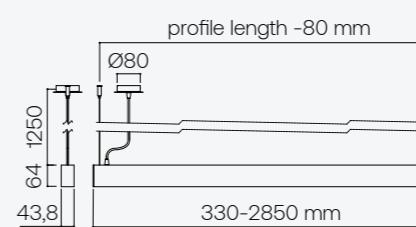

Nit UpDown Pendant

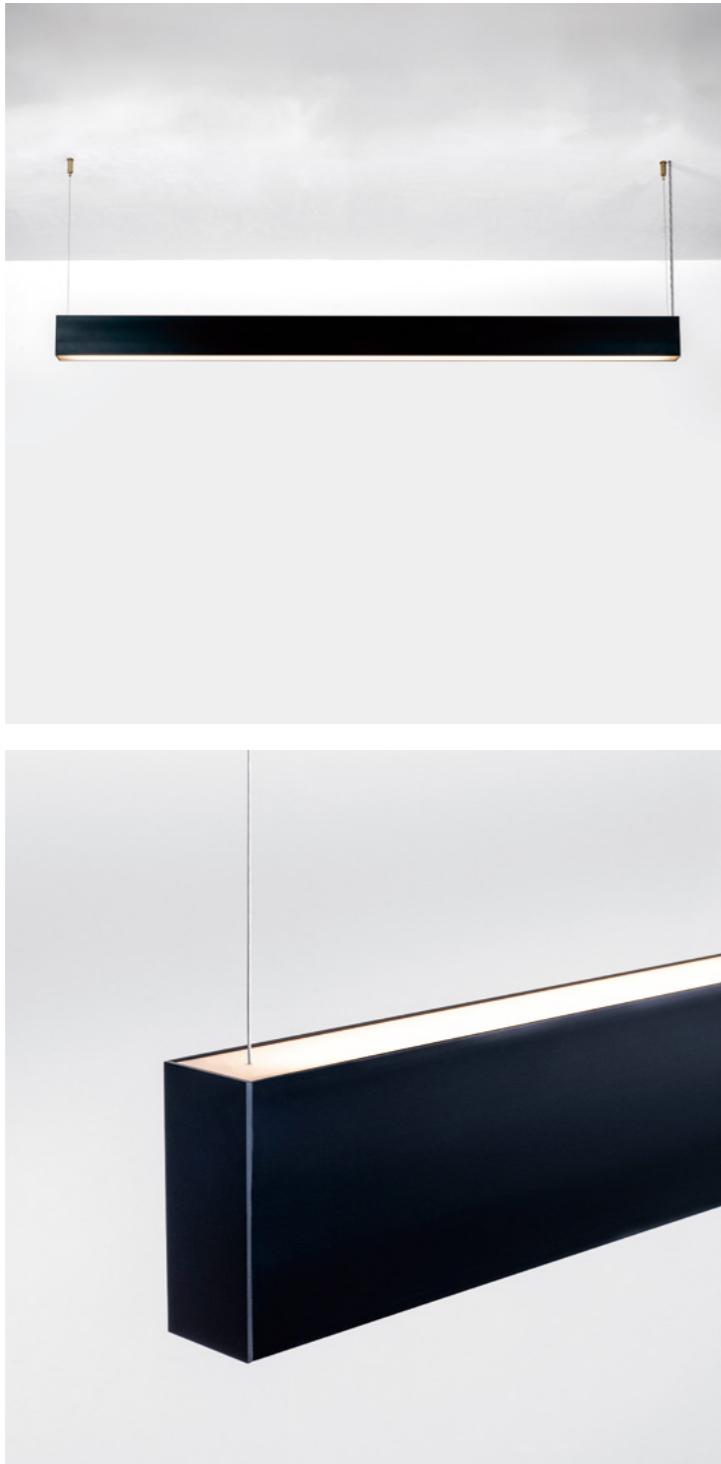

Luminary Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 4m cables
Cables de 4m
- 1450-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes Acabados básicos

- Black
- White

Special finishes Acabados especiales

- NCS**
 - Oliva - S 7010-G30Y
 - Ocre - S 5040-Y70R
 - Terracota - S 3050-Y60R
 - Mocha - S 5010-Y10R
 - Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

W Beam angle CRI K Lm Efficience

Nit UpDown Pendant IND 330 mm

F1A0.827015C0.x	2x8,8W	120°	80	2700K	2x810Lm	93Lm/W
F1A0.830015C0.x	2x8,8W	120°	80	3000K	2x830Lm	95Lm/W
F1A0.840015C0.x	2x8,8W	120°	80	4000K	2x880Lm	100Lm/W

Nit UpDown Pendant IND 610 mm

F2A0.827031C0.x	2x17,7W	120°	80	2700K	2x1620Lm	92Lm/W
F2A0.830031C0.x	2x17,7W	120°	80	3000K	2x1660Lm	94Lm/W
F2A0.840031C0.x	2x17,7W	120°	80	4000K	2x1760Lm	100Lm/W

Nit UpDown Pendant IND 890 mm

F3A0.827046C0.x	2x26,5W	120°	80	2700K	2x2430Lm	92Lm/W
F3A0.830046C0.x	2x26,5W	120°	80	3000K	2x2485Lm	94Lm/W
F3A0.840046C0.x	2x26,5W	120°	80	4000K	2x2640Lm	100Lm/W

Nit UpDown Pendant IND 1170 mm

F4A0.827061C0.x	2x35,4W	120°	80	2700K	2x3240Lm	92Lm/W
F4A0.830061C0.x	2x35,4W	120°	80	3000K	2x3315Lm	94Lm/W
F4A0.840061C0.x	2x35,4W	120°	80	4000K	2x3515Lm	100Lm/W

Nit UpDown Pendant IND 1450 mm

F5A0.827077C0.x	2x44,2W	120°	80	2700K	2x4050Lm	92Lm/W
F5A0.830077C0.x	2x44,2W	120°	80	3000K	2x4145Lm	94Lm/W
F5A0.840077C0.x	2x44,2W	120°	80	4000K	2x4395Lm	100Lm/W

Nit UpDown Pendant IND 1730 mm

F6A0.827092C0.x	2x53,1W	120°	80	2700K	2x4860Lm	92Lm/W
F6A0.830092C0.x	2x53,1W	120°	80	3000K	2x4975Lm	94Lm/W
F6A0.840092C0.x	2x53,1W	120°	80	4000K	2x5275Lm	100Lm/W

Nit UpDown Pendant IND 2010 mm

F7A0.827108C0.x	2x61,9W	120°	80	2700K	2x5670Lm	92Lm/W
F7A0.830108C0.x	2x61,9W	120°	80	3000K	2x5805Lm	94Lm/W
F7A0.840108C0.x	2x61,9W	120°	80	4000K	2x6155Lm	100Lm/W

Nit UpDown Pendant IND 2290 mm


F8A0.827123C0.x	2x70,8W	120°	80	2700K	2x6480Lm	92Lm/W
F8A0.830123C0.x	2x70,8W	120°	80	3000K	2x6630Lm	94Lm/W
F8A0.840123C0.x	2x70,8W	120°	80	4000K	2x7035Lm	100Lm/W

Nit UpDown Pendant IND 2570 mm

F9A0.827138C0.x	2x79,6W	120°	80	2700K	2x7290Lm	92Lm/W
F9A0.830138C0.x	2x79,6W	120°	80	3000K	2x7460Lm	94Lm/W
F9A0.840138C0.x	2x79,6W	120°	80	4000K	2x7915Lm	100Lm/W

Nit UpDown Pendant IND 2850 mm


FXA0.827154C0.x	2x88,5W	120°	80	2700K	2x8105Lm	92Lm/W
FXA0.830154C0.x	2x88,5W	120°	80	3000K	2x8290Lm	94Lm/W
FXA0.840154C0.x	2x88,5W	120°	80	4000K	2x8795Lm	100Lm/W

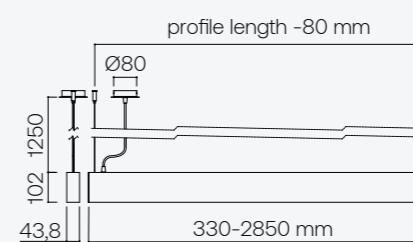

Nit Down Surface



Nit Down Surface



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 890-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Nit Down Surface IND 330 mm

	W	Beam angle	CRI	K	Lm	Efficience
A1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
A1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
A1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W

Nit Down Surface IND 610 mm

A2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
A2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
A2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W

Nit Down Surface IND 890 mm

A3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
A3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
A3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W

Nit Down Surface IND 1170 mm

A4A0.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
A4A0.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
A4A0.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W

Nit Down Surface IND 1450 mm

A5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
A5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
A5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W

Nit Down Surface IND 1730 mm

A6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
A6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
A6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W

Nit Down Surface IND 2010 mm

A7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
A7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
A7A0.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W

Nit Down Surface IND 2290 mm


A8A0.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
A8A0.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
A8A0.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W

Nit Down Surface IND 2570 mm


A9A0.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
A9A0.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
A9A0.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W

Nit Down Surface IND 2850 mm


AXA0.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
AXA0.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
AXA0.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W

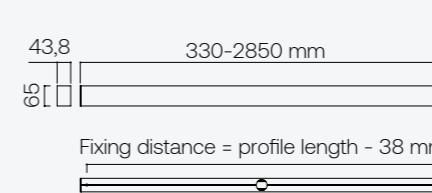

Nit Down Trimless

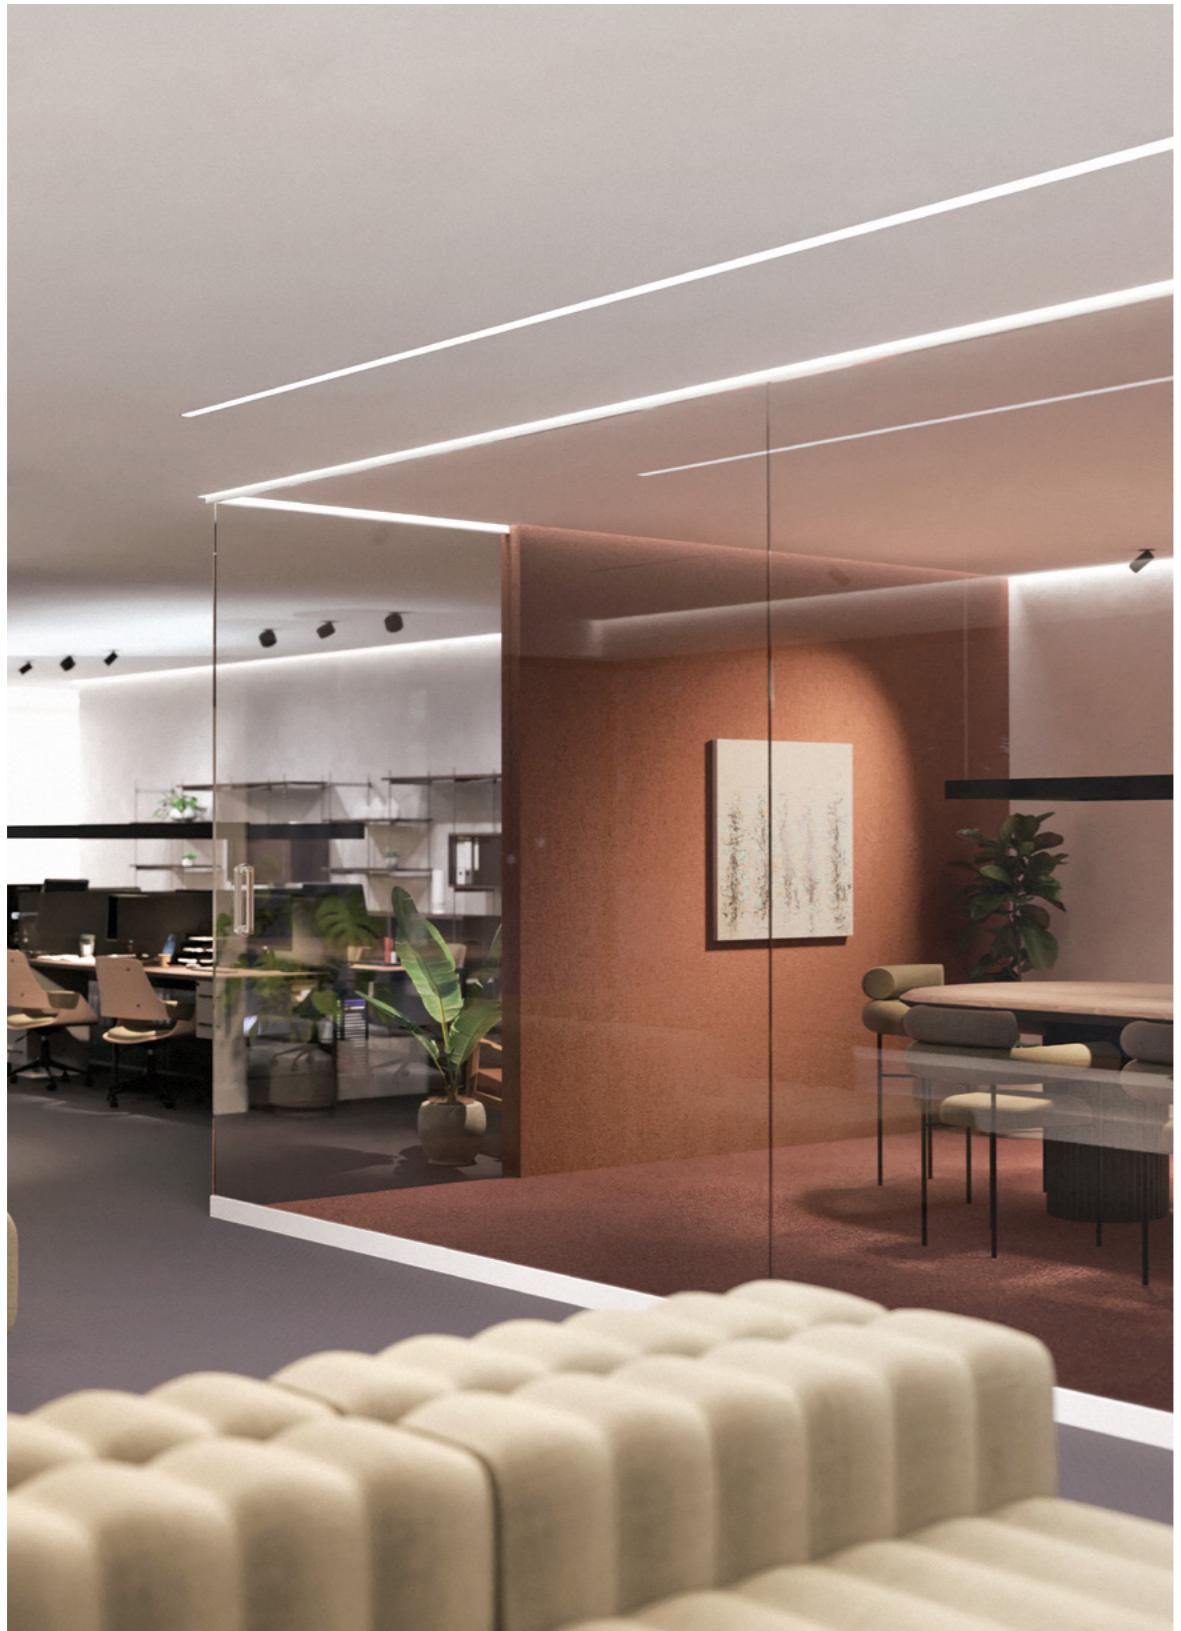

Nit Down Trimless

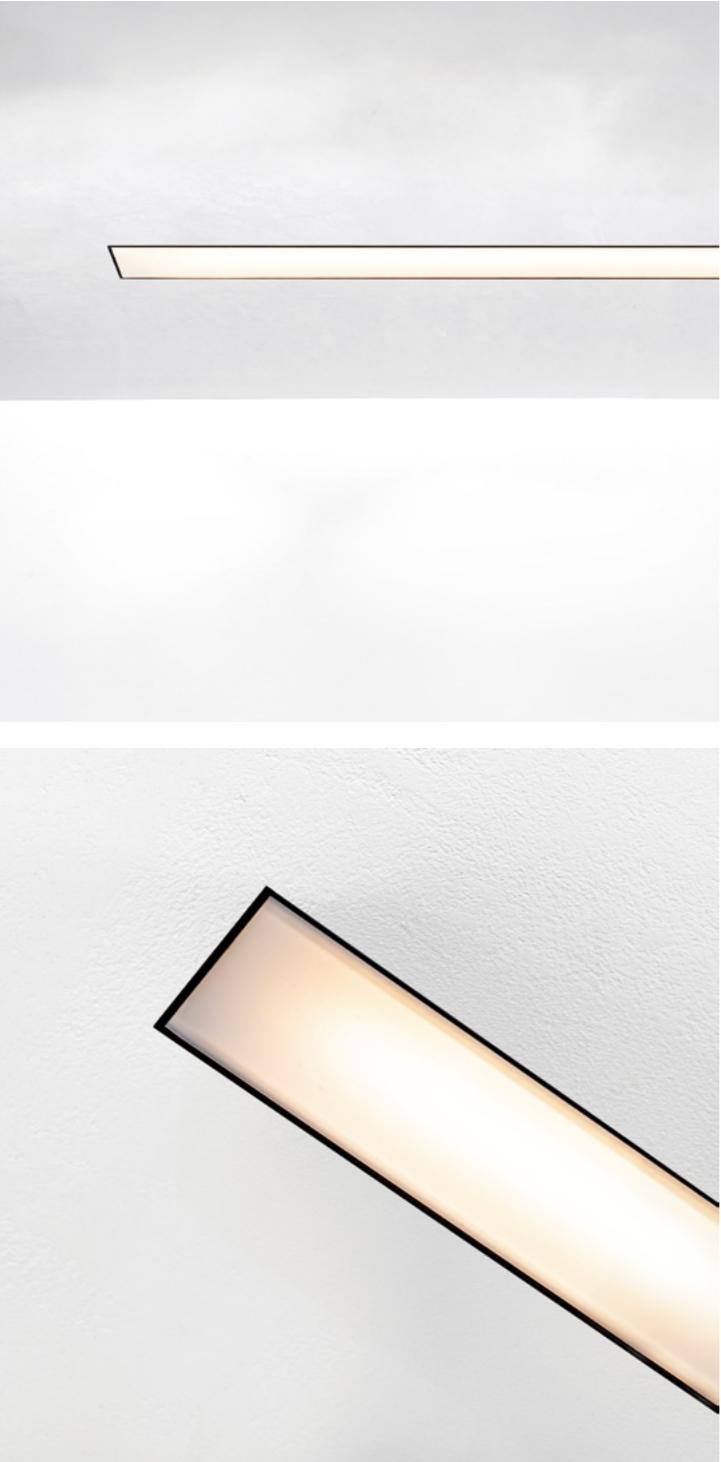

44x~
mm

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 890-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Nit Down In Trimless IND 330 mm

	W	Beam angle	CRI	K	Lm	Efficience
A1A6.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
A1A6.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
A1A6.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W

Nit Down In Trimless IND 610 mm

A2A6.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
A2A6.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
A2A6.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W

Nit Down In Trimless IND 890 mm

A3A6.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
A3A6.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
A3A6.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W

Nit Down In Trimless IND 1170 mm

A4A6.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
A4A6.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
A4A6.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W

Nit Down In Trimless IND 1450 mm

A5A6.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
A5A6.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
A5A6.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W

Nit Down In Trimless IND 1730 mm

A6A6.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
A6A6.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
A6A6.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W

Nit Down In Trimless IND 2010 mm

A7A6.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
A7A6.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
A7A6.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W

Nit Down In Trimless IND 2290 mm


A8A6.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
A8A6.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
A8A6.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W

Nit Down In Trimless IND 2570 mm


A9A6.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
A9A6.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
A9A6.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W

Nit Down In Trimless IND 2850 mm


AXA6.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
AXA6.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
AXA6.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W

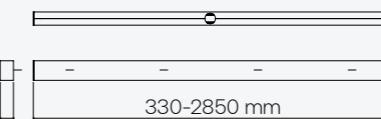

Nit Wall

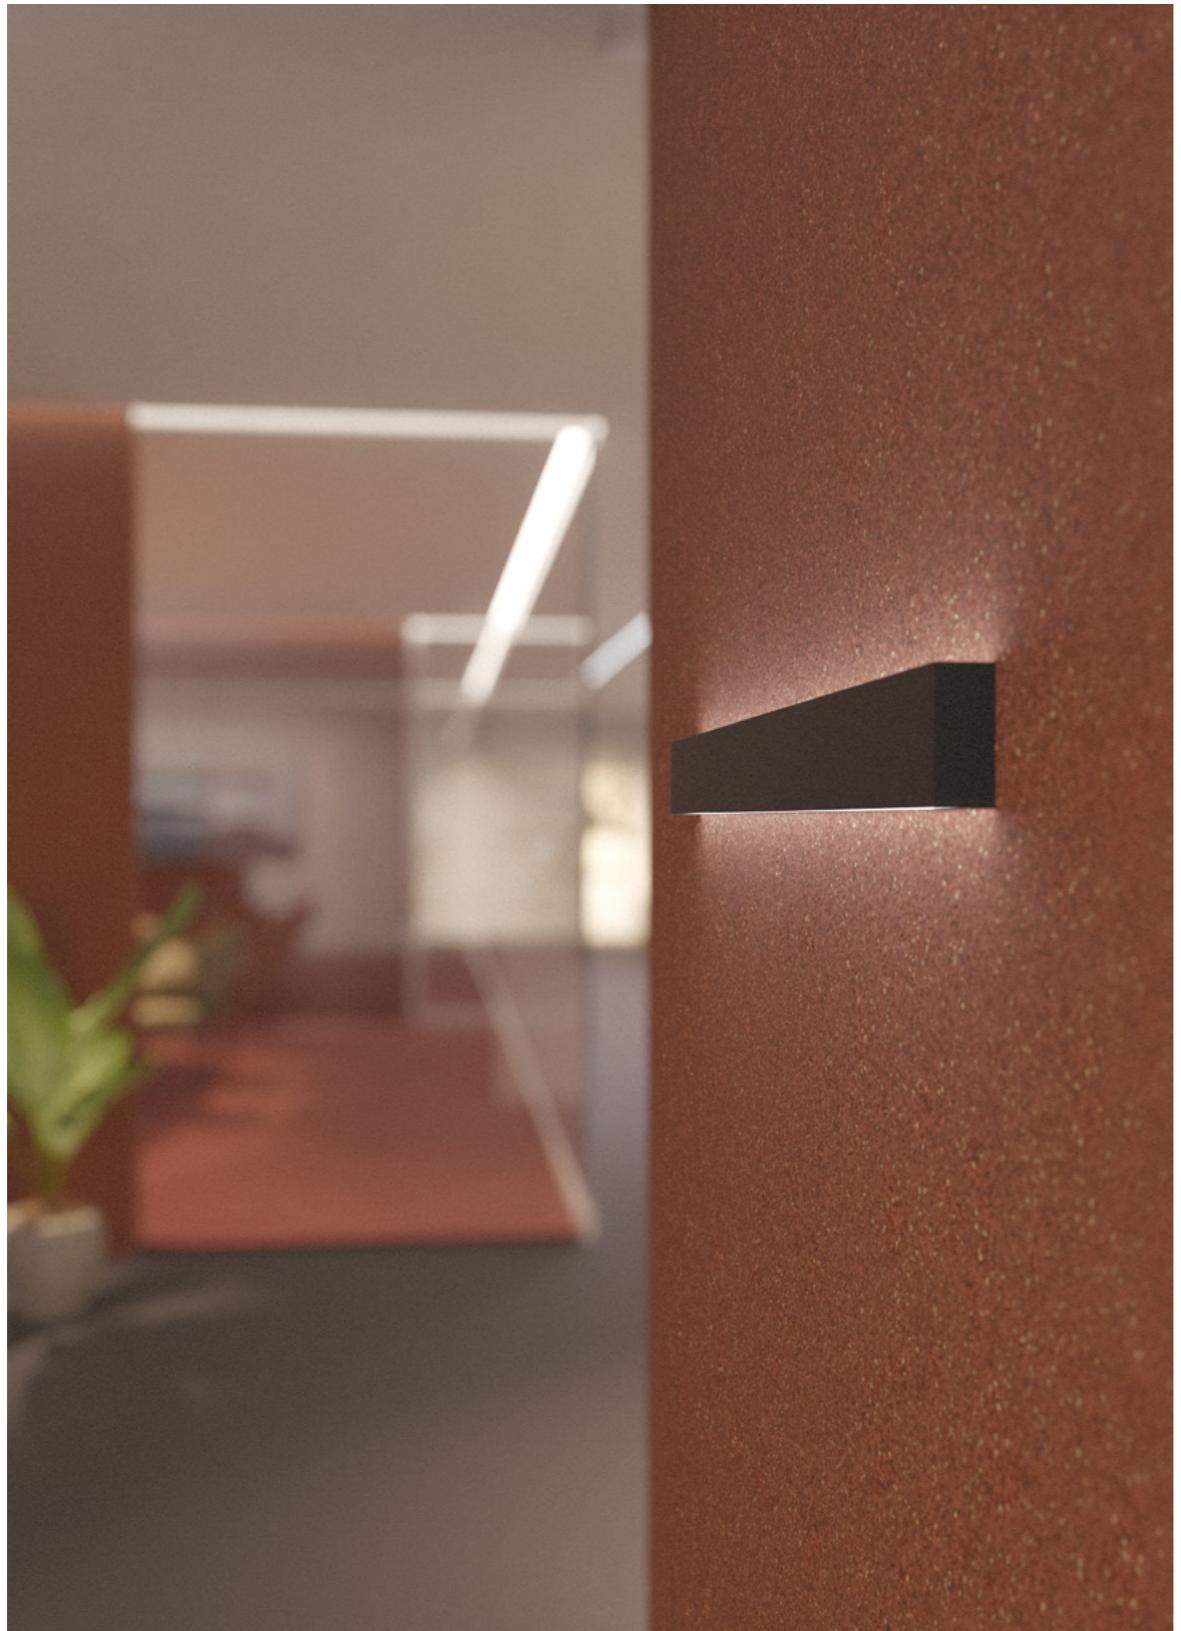

Nit Down Wall

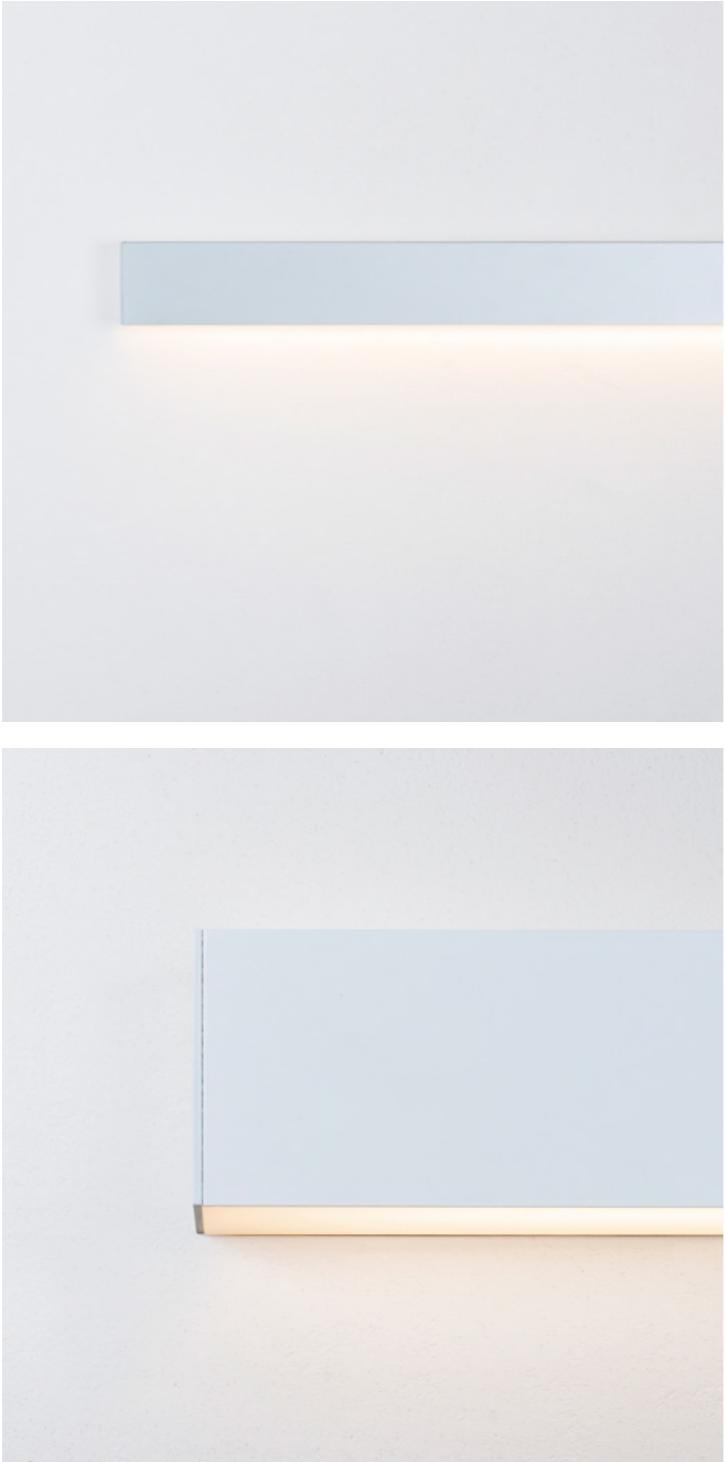

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 890-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Nit Down Wall IND 330mm

	W	Beam angle	CRI	K	Lm	Efficience
B1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
B1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
B1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W

Nit Down Wall IND 610 mm

B2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
B2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
B2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W

Nit Down Wall IND 890 mm

B3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
B3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
B3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W

Nit Down Wall IND 1170 mm

B4A0.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
B4A0.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
B4A0.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W

Nit Down Wall IND 1450 mm

B5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
B5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
B5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W

Nit Down Wall IND 1730 mm

B6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
B6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
B6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W

Nit Down Wall IND 2010 mm

B7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
B7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
B7A0.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W

Nit Down Wall IND 2290 mm

B8A0.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
B8A0.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
B8A0.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W

Nit Down Wall IND 2570 mm



B9A0.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
B9A0.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
B9A0.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W

Nit Down Wall IND 2850 mm


BXA0.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
BXA0.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
BXA0.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W



330-2850 mm



Nit UpDown Wall



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 1450-2570 mm:
- 1h emergency kit
- Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

Nit UpDown Wall IND 330mm

	W	Beam angle	CRI	K	Lm	Efficience
E1A0.827015C0.x	2x8,8W	120°	80	2700K	2x810Lm	93Lm/W
E1A0.830015C0.x	2x8,8W	120°	80	3000K	2x830Lm	95Lm/W
E1A0.840015C0.x	2x8,8W	120°	80	4000K	2x880Lm	100Lm/W

Nit UpDown Wall IND 610mm

E2A0.827031C0.x	2x17,7W	120°	80	2700K	2x1620Lm	92Lm/W
E2A0.830031C0.x	2x17,7W	120°	80	3000K	2x1660Lm	94Lm/W
E2A0.840031C0.x	2x17,7W	120°	80	4000K	2x1760Lm	100Lm/W

Nit UpDown Wall IND 890mm

E3A0.827046C0.x	2x26,5W	120°	80	2700K	2x2430Lm	92Lm/W
E3A0.830046C0.x	2x26,5W	120°	80	3000K	2x2485Lm	94Lm/W
E3A0.840046C0.x	2x26,5W	120°	80	4000K	2x2640Lm	100Lm/W

Nit UpDown Wall IND 1170mm

E4A0.827061C0.x	2x35,4W	120°	80	2700K	2x3240Lm	92Lm/W
E4A0.830061C0.x	2x35,4W	120°	80	3000K	2x3315Lm	94Lm/W
E4A0.840061C0.x	2x35,4W	120°	80	4000K	2x3515Lm	100Lm/W

Nit UpDown Wall IND 1450mm

E5A0.827077C0.x	2x44,2W	120°	80	2700K	2x4050Lm	92Lm/W
E5A0.830077C0.x	2x44,2W	120°	80	3000K	2x4145Lm	94Lm/W
E5A0.840077C0.x	2x44,2W	120°	80	4000K	2x4395Lm	100Lm/W

Nit UpDown Wall IND 1730mm

E6A0.827092C0.x	2x53,1W	120°	80	2700K	2x4860Lm	92Lm/W
E6A0.830092C0.x	2x53,1W	120°	80	3000K	2x4975Lm	94Lm/W
E6A0.840092C0.x	2x53,1W	120°	80	4000K	2x5275Lm	100Lm/W

Nit UpDown Wall IND 2010mm

E7A0.827108C0.x	2x61,9W	120°	80	2700K	2x5670Lm	92Lm/W
E7A0.830108C0.x	2x61,9W	120°	80	3000K	2x5805Lm	94Lm/W
E7A0.840108C0.x	2x61,9W	120°	80	4000K	2x6155Lm	100Lm/W

Nit UpDown Wall IND 2290mm

E8A0.827123C0.x	2x70,8W	120°	80	2700K	2x6480Lm	92Lm/W
E8A0.830123C0.x	2x70,8W	120°	80	3000K	2x6630Lm	94Lm/W
E8A0.840123C0.x	2x70,8W	120°	80	4000K	2x7035Lm	100Lm/W


Nit UpDown Wall IND 2570mm

E9A0.827138C0.x	2x79,6W	120°	80	2700K	2x7290Lm	92Lm/W
E9A0.830138C0.x	2x79,6W	120°	80	3000K	2x7460Lm	94Lm/W
E9A0.840138C0.x	2x79,6W	120°	80	4000K	2x7915Lm	100Lm/W


Nit UpDown Wall IND 2850mm

EXA0.827154C0.x	2x88,5W	120°	80	2700K	2x8105Lm	92Lm/W
EXA0.830154C0.x	2x88,5W	120°	80	3000K	2x8290Lm	94Lm/W
EXA0.840154C0.x	2x88,5W	120°	80	4000K	2x8795Lm	100Lm/W

330-2850 mm

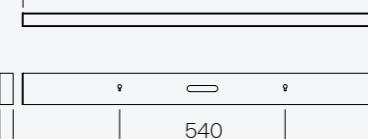


Nixeven Pendant

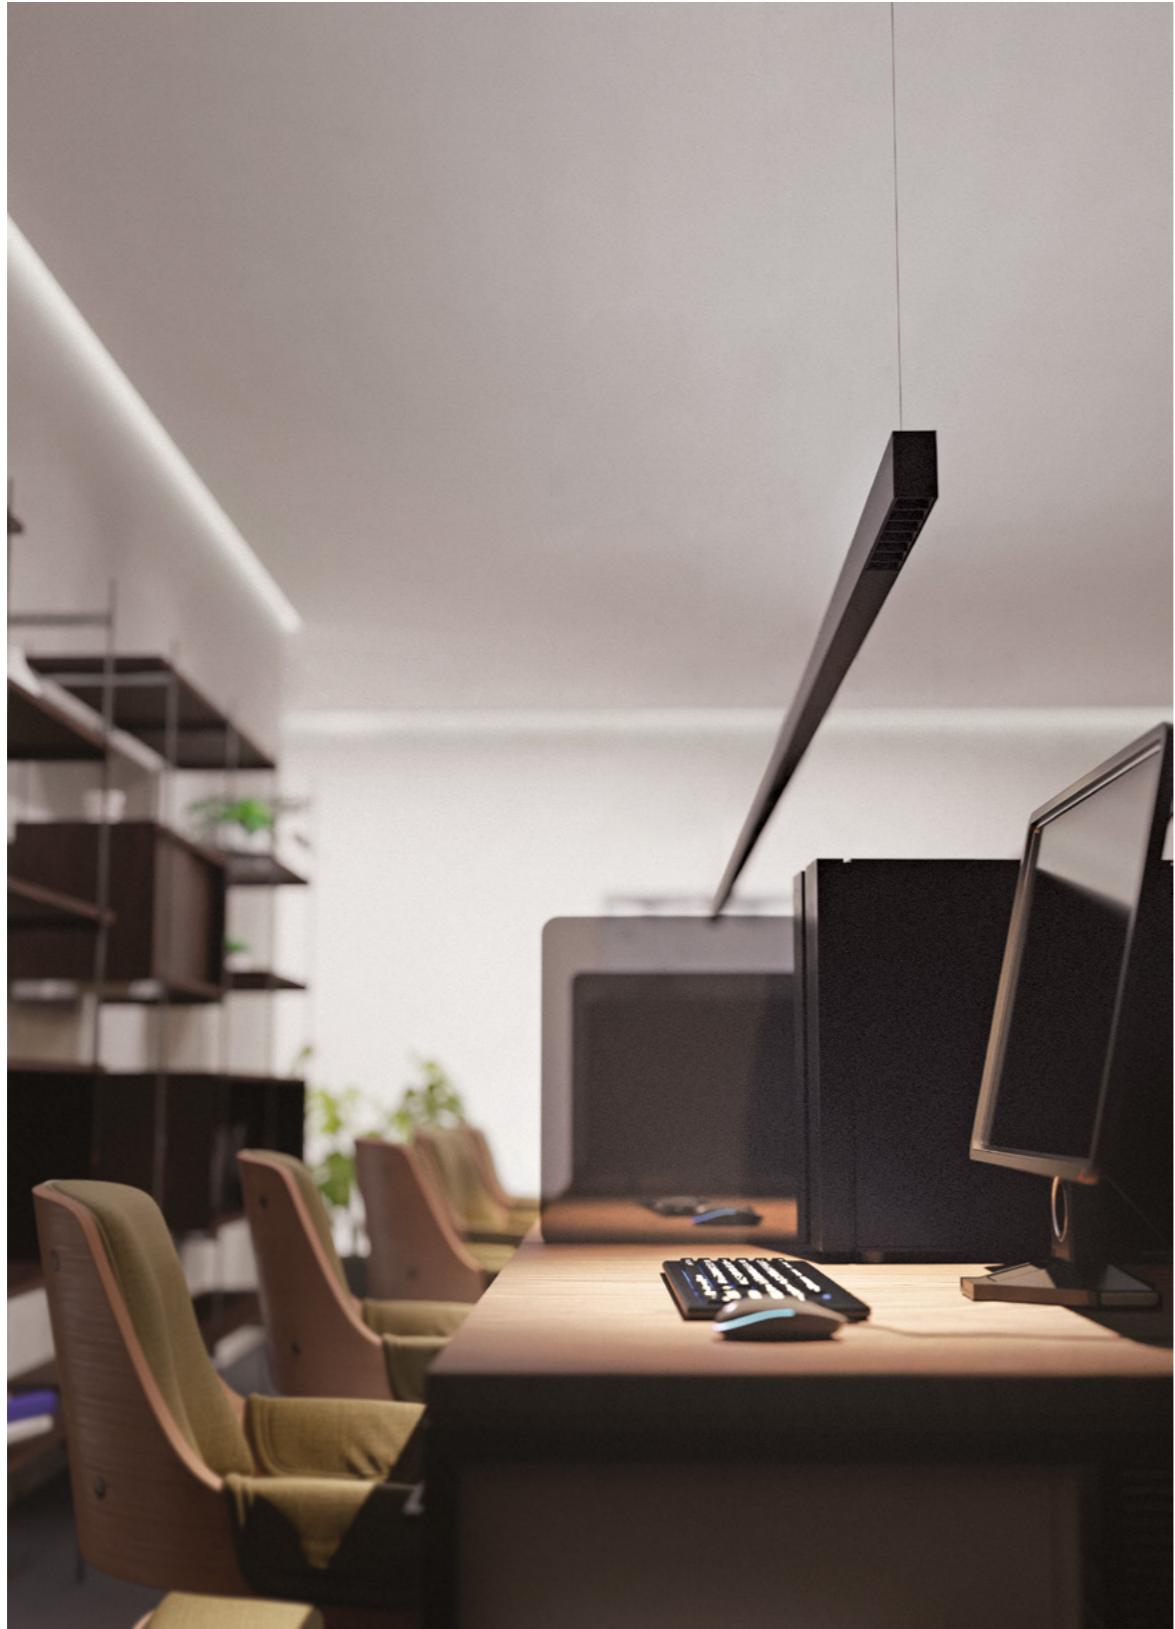

MADE IN
BCN
BY HER



Nixeven Pendant



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- PCB TRIDONIC
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 4m cables
- Cables de 4m

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Xtrem

Full


Zebra



Cod.	W	Beam angle	CRI	K	Lm	Efficience
Nixevel Full Pend. IND 610 mm						
M2A0.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
M2A0.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
M2A0.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
M2A0.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
M2A0.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
M2A0.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixevel Full Pend. IND 890 mm						
M3A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
M3A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
M3A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
M3A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
M3A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
M3A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixevel Full Pend. IND 1170 mm						
M4A0.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
M4A0.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
M4A0.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
M4A0.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
M4A0.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
M4A0.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixevel Full Pend. IND 1450 mm						
M5A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
M5A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
M5A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
M5A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
M5A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
M5A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixevel Full Pend. IND 1730 mm						
M6A0.82703335.x	38,2W	35°	80	2700K	5040Lm	132Lm/W
M6A0.82703365.x	38,2W	65°	80	2700K	5040Lm	132Lm/W
M6A0.83004535.x	52,4W	35°	80	3000K	6960Lm	133Lm/W
M6A0.83004565.x	52,4W	65°	80	3000K	6960Lm	133Lm/W
M6A0.84004535.x	52,4W	35°	80	4000K	7320Lm	140Lm/W
M6A0.84004565.x	52,4W	65°	80	4000K	7320Lm	140Lm/W
Nixevel Full Pend. IND 2010 mm						
M7A0.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
M7A0.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
M7A0.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
M7A0.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
M7A0.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
M7A0.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixevel Full Pend. IND 2290 mm						
M8A0.82704435.x	51W	35°	80	2700K	6720Lm	132Lm/W
M8A0.82704465.x	51W	65°	80	2700K	6720Lm	132Lm/W
M8A0.83006135.x	69,9W	35°	80	3000K	9280Lm	133Lm/W
M8A0.83006165.x	69,9W	65°	80	3000K	9280Lm	133Lm/W
M8A0.84006135.x	69,9W	35°	80	4000K	9760Lm	140Lm/W
M8A0.84006165.x	69,9W	65°	80	4000K	9760Lm	140Lm/W
Nixevel Full Pend. IND 2570 mm						
M9A0.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
M9A0.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
M9A0.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
M9A0.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
M9A0.84006835.x	78,6W	35°	80	4000K	10980Lm	140Lm/W
M9A0.84006865.x	78,6W	65°	80	4000K	10980Lm	140Lm/W
Nixevel Full Pend. IND 2850 mm						
MXA0.82705535.x	63,8W	35°	80	2700K	8400Lm	132Lm/W
MXA0.82705565.x	63,8W	65°	80	2700K	8400Lm	132Lm/W
MXA0.83007635.x	87,4W	35°	80	3000K	11600Lm	133Lm/W
MXA0.83007665.x	87,4W	65°	80	3000K	11600Lm	133Lm/W
MXA0.84007635.x	87,4W	35°	80	4000K	12200Lm	140Lm/W
MXA0.84007665.x	87,4W	65°	80	4000K	12200Lm	140Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficience
Nixevel Zebra Pend. IND 890 mm						
O3A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
O3A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
O3A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
O3A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
O3A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
O3A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixevel Zebra Pend. IND 1450 mm						
O5A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
O5A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
O5A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
O5A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
O5A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
O5A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixevel Zebra Pend. IND 2010 mm						
O7A0.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
O7A0.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
O7A0.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
O7A0.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
O7A0.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
O7A0.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixevel Zebra Pend. IND 2570 mm						
O9A0.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
O9A0.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
O9A0.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
O9A0.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
O9A0.84006835.x	78,6W	35°	80	4000K	10980Lm	140L

Nixeven Surface



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- PCB TRIDONIC
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Xtrem

Full


Zebra



Cod.	W	Beam angle	CRI	K	Lm	Efficience
Nixevel Full Surf. IND 610 mm						
L2A0.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
L2A0.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
L2A0.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
L2A0.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
L2A0.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
L2A0.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixevel Full Surf. IND 890 mm						
L3A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
L3A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
L3A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
L3A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
L3A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
L3A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixevel Full Surf. IND 1170 mm						
L4A0.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
L4A0.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
L4A0.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
L4A0.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
L4A0.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
L4A0.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixevel Full Surf. IND 1450 mm						
L5A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
L5A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
L5A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
L5A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
L5A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
L5A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixevel Full Surf. IND 1730 mm						
L6A0.82703335.x	38,2W	35°	80	2700K	5040Lm	132Lm/W
L6A0.82703365.x	38,2W	65°	80	2700K	5040Lm	132Lm/W
L6A0.83004535.x	52,4W	35°	80	3000K	6960Lm	133Lm/W
L6A0.83004565.x	52,4W	65°	80	3000K	6960Lm	133Lm/W
L6A0.84004535.x	52,4W	35°	80	4000K	7320Lm	140Lm/W
L6A0.84004565.x	52,4W	65°	80	4000K	7320Lm	140Lm/W
Nixevel Full Surf. IND 2010 mm						
L7A0.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
L7A0.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
L7A0.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
L7A0.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
L7A0.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
L7A0.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixevel Full Surf. IND 2290 mm						
L8A0.82704435.x	51W	35°	80	2700K	6720Lm	132Lm/W
L8A0.82704465.x	51W	65°	80	2700K	6720Lm	132Lm/W
L8A0.83006135.x	69,9W	35°	80	3000K	9280Lm	133Lm/W
L8A0.83006165.x	69,9W	65°	80	3000K	9280Lm	133Lm/W
L8A0.84006135.x	69,9W	35°	80	4000K	9760Lm	140Lm/W
L8A0.84006165.x	69,9W	65°	80	4000K	9760Lm	140Lm/W
Nixevel Full Surf. IND 2570 mm						
L9A0.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
L9A0.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
L9A0.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
L9A0.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
L9A0.84006835.x	78,6W	35°	80	4000K	10980Lm	140Lm/W
L9A0.84006865.x	78,6W	65°	80	4000K	10980Lm	140Lm/W
Nixevel Full Surf. IND 2850 mm						
LXA0.82705535.x	63,8W	35°	80	2700K	8400Lm	132Lm/W
LXA0.82705565.x	63,8W	65°	80	2700K	8400Lm	132Lm/W
LXA0.83007635.x	87,4W	35°	80	3000K	11600Lm	133Lm/W
LXA0.83007665.x	87,4W	65°	80	3000K	11600Lm	133Lm/W
LXA0.84007635.x	87,4W	35°	80	4000K	12200Lm	140Lm/W
LXA0.84007665.x	87,4W	65°	80	4000K	12200Lm	140Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficience
Nixevel Zebra Surf. IND 890 mm						
N3A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
N3A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
N3A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
N3A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
N3A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
N3A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixevel Zebra Surf. IND 1450 mm						
N5A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
N5A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
N5A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
N5A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
N5A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
N5A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixevel Zebra Surf. IND 2010 mm						
N7A0.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
N7A0.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
N7A0.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
N7A0.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
N7A0.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
N7A0.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixevel Zebra Surf. IND 2570 mm						
N9A0.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
N9A0.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
N9A0.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
N9A0.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
N9A0.84006835.x	78,6W	35°	80	4000K	10980Lm	140L

Nixeven Trimless



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- PCB TRIDONIC
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Xtrem



Full



Zebra



334 - 2854

Cod.	W	Beam angle	CRI	K	Lm	Efficience
Nixevel Full In Trimless IND 610 mm						
L2A6.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
L2A6.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
L2A6.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
L2A6.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
L2A6.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
L2A6.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixevel Full In Trimless IND 890 mm						
L3A6.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
L3A6.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
L3A6.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
L3A6.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
L3A6.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
L3A6.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixevel Full In Trimless IND 1170 mm						
L4A6.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
L4A6.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
L4A6.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
L4A6.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
L4A6.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
L4A6.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixevel Full In Trimless IND 1450 mm						
L5A6.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
L5A6.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
L5A6.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
L5A6.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
L5A6.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
L5A6.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixevel Full In Trimless IND 1730 mm						
L6A6.82703335.x	38,2W	35°	80	2700K	5040Lm	132Lm/W
L6A6.82703365.x	38,2W	65°	80	2700K	5040Lm	132Lm/W
L6A6.83004535.x	52,4W	35°	80	3000K	6960Lm	133Lm/W
L6A6.83004565.x	52,4W	65°	80	3000K	6960Lm	133Lm/W
L6A6.84004535.x	52,4W	35°	80	4000K	7320Lm	140Lm/W
L6A6.84004565.x	52,4W	65°	80	4000K	7320Lm	140Lm/W
Nixevel Full In Trimless IND 2010 mm						
L7A6.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
L7A6.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
L7A6.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
L7A6.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
L7A6.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
L7A6.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixevel Full In Trimless IND 2290 mm						
L8A6.82704435.x	51W	35°	80	2700K	6720Lm	132Lm/W
L8A6.82704465.x	51W	65°	80	2700K	6720Lm	132Lm/W
L8A6.83006135.x	69,9W	35°	80	3000K	9280Lm	133Lm/W
L8A6.83006165.x	69,9W	65°	80	3000K	9280Lm	133Lm/W
L8A6.84006135.x	69,9W	35°	80	4000K	9760Lm	140Lm/W
L8A6.84006165.x	69,9W	65°	80	4000K	9760Lm	140Lm/W
Nixevel Full In Trimless IND 2570 mm						
L9A6.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
L9A6.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
L9A6.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
L9A6.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
L9A6.84006835.x	78,6W	35°	80	4000K	10980Lm	140Lm/W
L9A6.84006865.x	78,6W	65°	80	4000K	10980Lm	140Lm/W
Nixevel Full In Trimless IND 2850 mm						
LXA6.82705535.x	63,8W	35°	80	2700K	8400Lm	132Lm/W
LXA6.82705565.x	63,8W	65°	80	2700K	8400Lm	132Lm/W
LXA6.83007635.x	87,4W	35°	80	3000K	11600Lm	133Lm/W
LXA6.83007665.x	87,4W	65°	80	3000K	11600Lm	133Lm/W
LXA6.84007635.x	87,4W	35°	80	4000K	12200Lm	140Lm/W
LXA6.84007665.x	87,4W	65°	80	4000K	12200Lm	140Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficience
Nixevel Zebra In Trimless IND 890 mm						
N3A6.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
N3A6.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
N3A6.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
N3A6.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
N3A6.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
N3A6.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixevel Zebra In Trimless IND 1450 mm						
N5A6.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
N5A6.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
N5A6.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
N5A6.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
N5A6.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
N5A6.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixevel Zebra In Trimless IND 2010 mm						
N7A6.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
N7A6.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
N7A6.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
N7A6.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
N7A6.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
N7A6.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixevel Zebra In Trimless IND 2570 mm						
N9A6.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
N9A6.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
N9A6.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
N9A6.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
N9A6.84006835.x	78,6W	35°	80	4000K	109	

LIV_baliza

by Bruno de Avila



A pure and functional outdoor design, conceived to
create a comfortable and warm atmosphere.

Un diseño de exterior puro y funcional, concebido
para crear una atmósfera confortable y cálida.



LIV_baliza

by Bruno de Avila



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 24VDC

Protection Protección

- IP65

Basic finishes

Acabados básicos

- Black
- White

400 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficience
3210.927004l0.x	4,5W	180°	90	2700K	211Lm	47Lm/W
3210.930004l0.x	4,5W	180°	90	3000K	219Lm	49Lm/W
3210.940004l0.x	4,5W	180°	90	4000K	230Lm	52Lm/W


600 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficience
3211.927004l0.x	4,5W	180°	90	2700K	211Lm	47Lm/W
3211.930004l0.x	4,5W	180°	90	3000K	219Lm	49Lm/W
3211.940004l0.x	4,5W	180°	90	4000K	230Lm	52Lm/W

800 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficience
3212.927004l0.x	4,5W	180°	90	2700K	211Lm	47Lm/W
3212.930004l0.x	4,5W	180°	90	3000K	219Lm	49Lm/W
3212.940004l0.x	4,5W	180°	90	4000K	230Lm	52Lm/W

Downloads Descargas


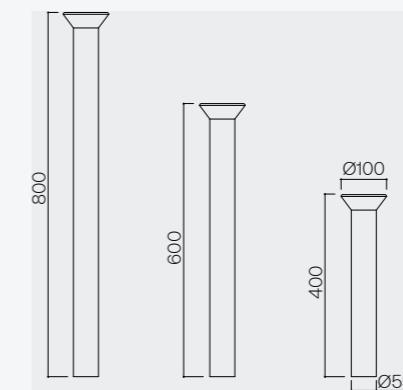


PM 111_baliza

by Her design team



PM 111_baliza

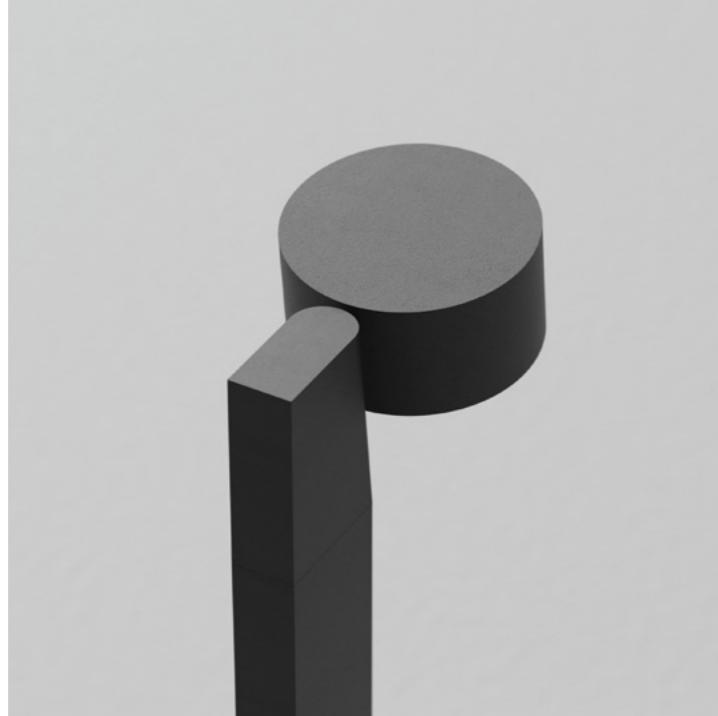

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 24VDC

Protection Protección

- IP54

Accessories Accesorios

- Honeycomb (included)
- Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Downloads Descargas



200 mm


Cod.	W	Beam angle	CRI	K	Lm	Efficience
3207.927004HA.x	4,5W	HC15°	90	2700K	375Lm	84Lm/W
3207.927004HCx	4,5W	HC36°	90	2700K	375Lm	84Lm/W
3207.930004HA.x	4,5W	HC15°	90	3000K	395Lm	88Lm/W
3207.930004HCx	4,5W	HC36°	90	3000K	395Lm	88Lm/W
3207.940004HA.x	4,5W	HC15°	90	4000K	420Lm	94Lm/W
3207.940004HCx	4,5W	HC36°	90	4000K	420Lm	94Lm/W

400 mm


Cod.	W	Beam angle	CRI	K	Lm	Efficience
3208.927004HA.x	4,5W	HC15°	90	2700K	375Lm	84Lm/W
3208.927004HCx	4,5W	HC36°	90	2700K	375Lm	84Lm/W
3208.930004HA.x	4,5W	HC15°	90	3000K	395Lm	88Lm/W
3208.930004HCx	4,5W	HC36°	90	3000K	395Lm	88Lm/W
3208.940004HA.x	4,5W	HC15°	90	4000K	420Lm	94Lm/W
3208.940004HCx	4,5W	HC36°	90	4000K	420Lm	94Lm/W

600 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficience
3209.927004HA.x	4,5W	HC15°	90	2700K	375Lm	84Lm/W
3209.927004HCx	4,5W	HC36°	90	2700K	375Lm	84Lm/W
3209.930004HA.x	4,5W	HC15°	90	3000K	395Lm	88Lm/W
3209.930004HCx	4,5W	HC36°	90	3000K	395Lm	88Lm/W
3209.940004HA.x	4,5W	HC15°	90	4000K	420Lm	94Lm/W
3209.940004HCx	4,5W	HC36°	90	4000K	420Lm	94Lm/W

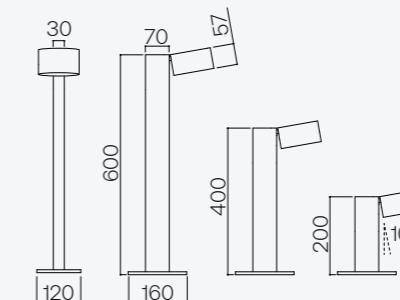


PM 25_on slim ip

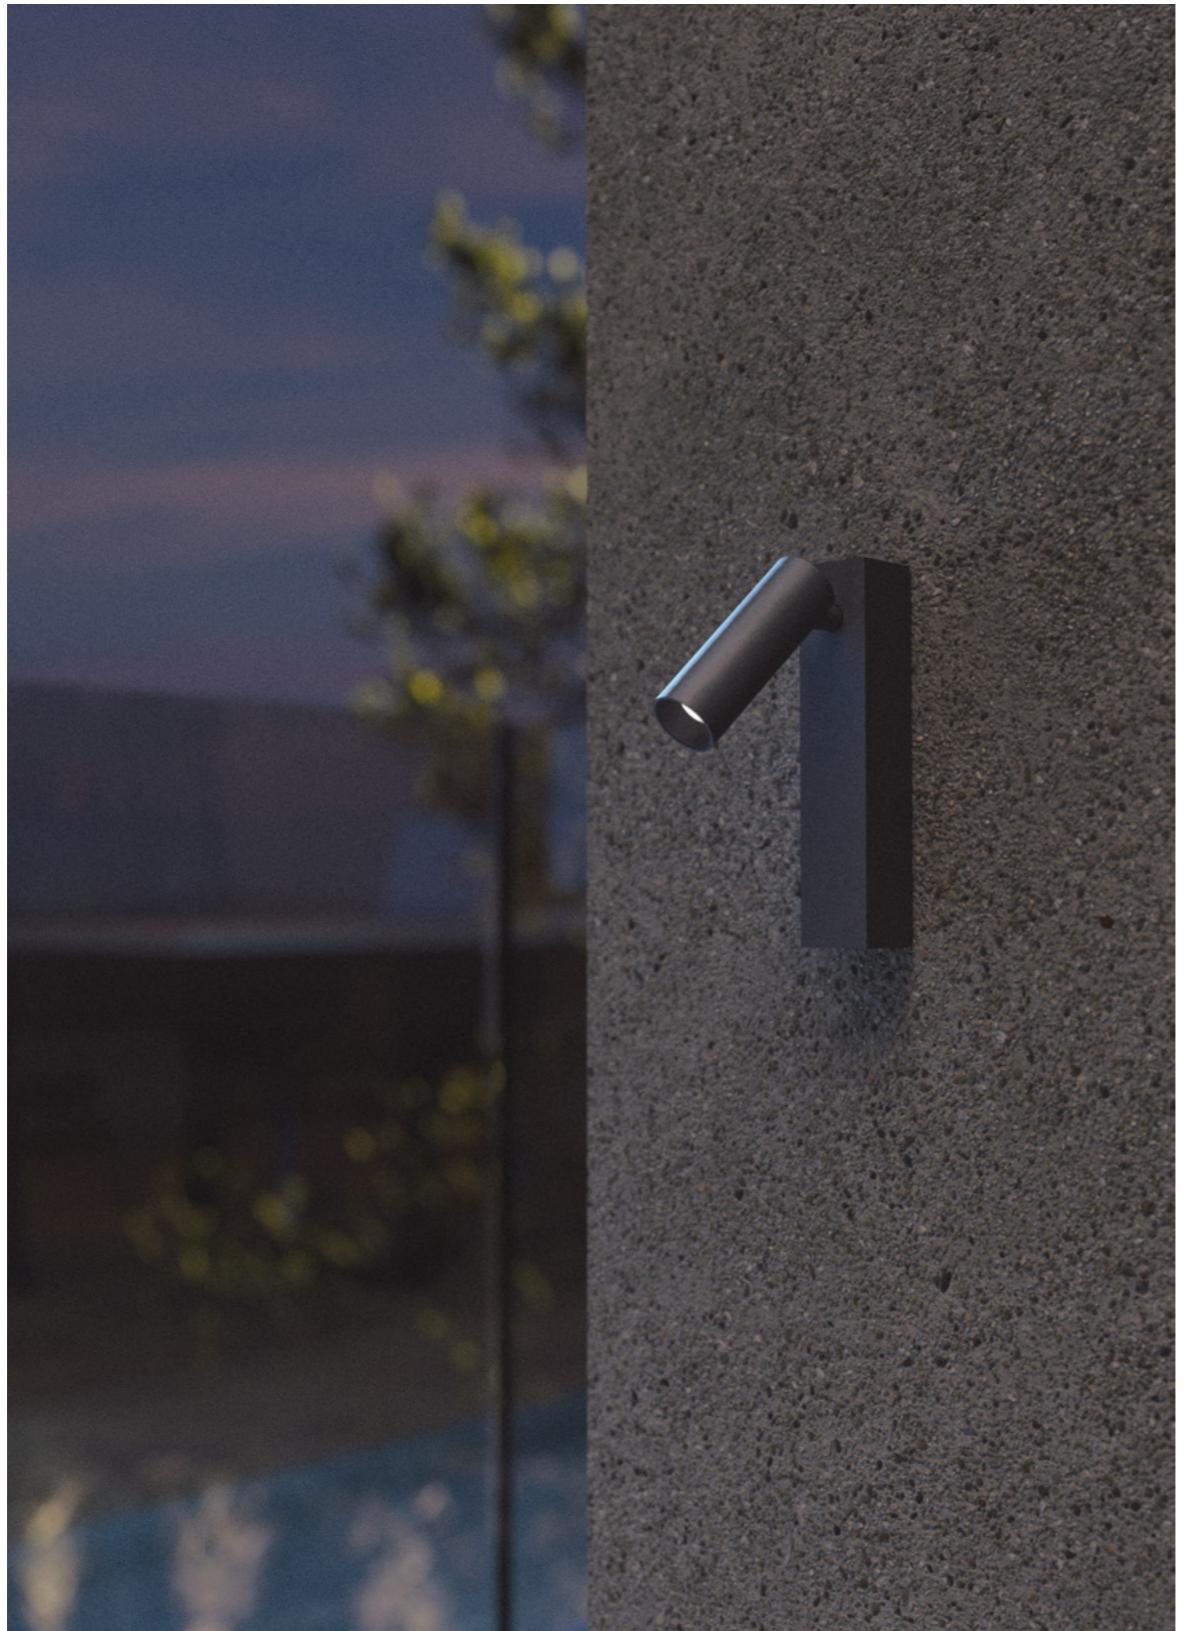

230 — Outdoor



PM 25_on slim ip



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP54

Basic finishes


Acabados básicos

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficience
3205.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
3205.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
3205.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
3205.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

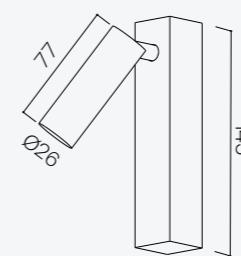

PM 25_in spot ip



234 — Outdoor

Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Included - Incluido

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP54

Basic finishes


Acabados básicos

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficience
3206.92700414x	4,8W	14°	90	2700K	350Lm	73Lm/W
3206.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
3206.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
3206.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

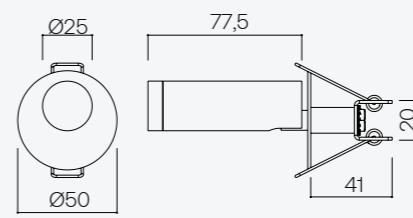

PM 111_on fix ip

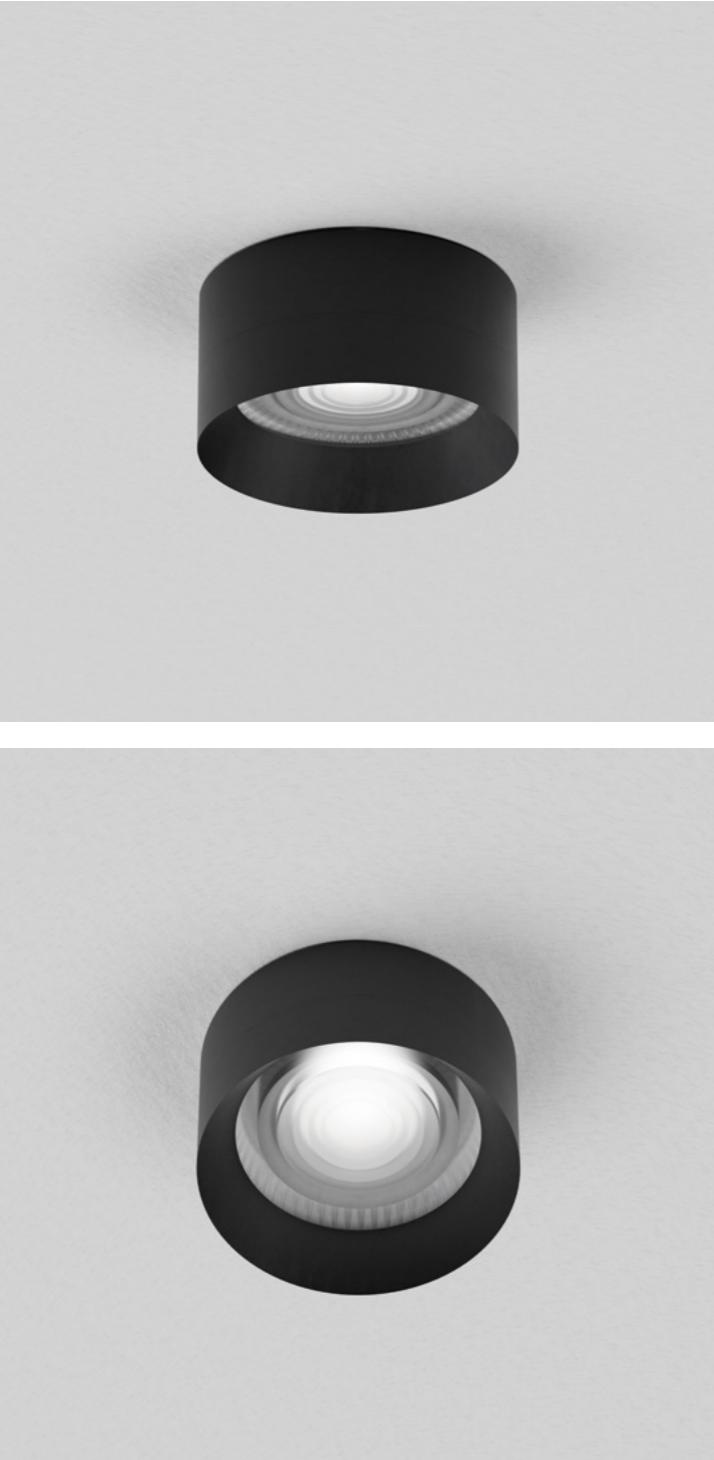

Luminary

Luminária

- L70 > 35000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP54

Basic finishes

Acabados básicos


- Black
- White

Downloads Descargas



Cod.

Cod.	W	Beam angle	CRI	K	Lm	Efficience
3203.92701336x	15,6W	36°	90	2700K	1020Lm	66Lm/W
3203.93001336x	15,6W	36°	90	3000K	1084Lm	70Lm/W

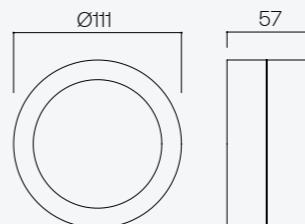

Tar

Magnetic Track

DESCRIPTION

Low voltage electrified rail system with luminaire anchorage using a high power magnetic system.

Optimized design to ensure constant tension in lengths up to 50m. Simple and elegant design.

Available in surface, pendant and recessed version.
Availability of DALI system without changing track.


DESCRIPCIÓN

Sistema de carril electrificado de bajo voltaje con anclaje de las luminarias mediante un sistema magnético de gran sujeción.


Diseño optimizado para asegurar una tensión constante en longitudes de hasta 50m. De diseño simple y elegante.

Disponible en versión de superficie, suspensión y empotrar. Disponibilidad de sistema DALI sin necesidad de cambiar carril.


ELECTRIC INSTALLATION - INSTALACIÓN VOLTAJE

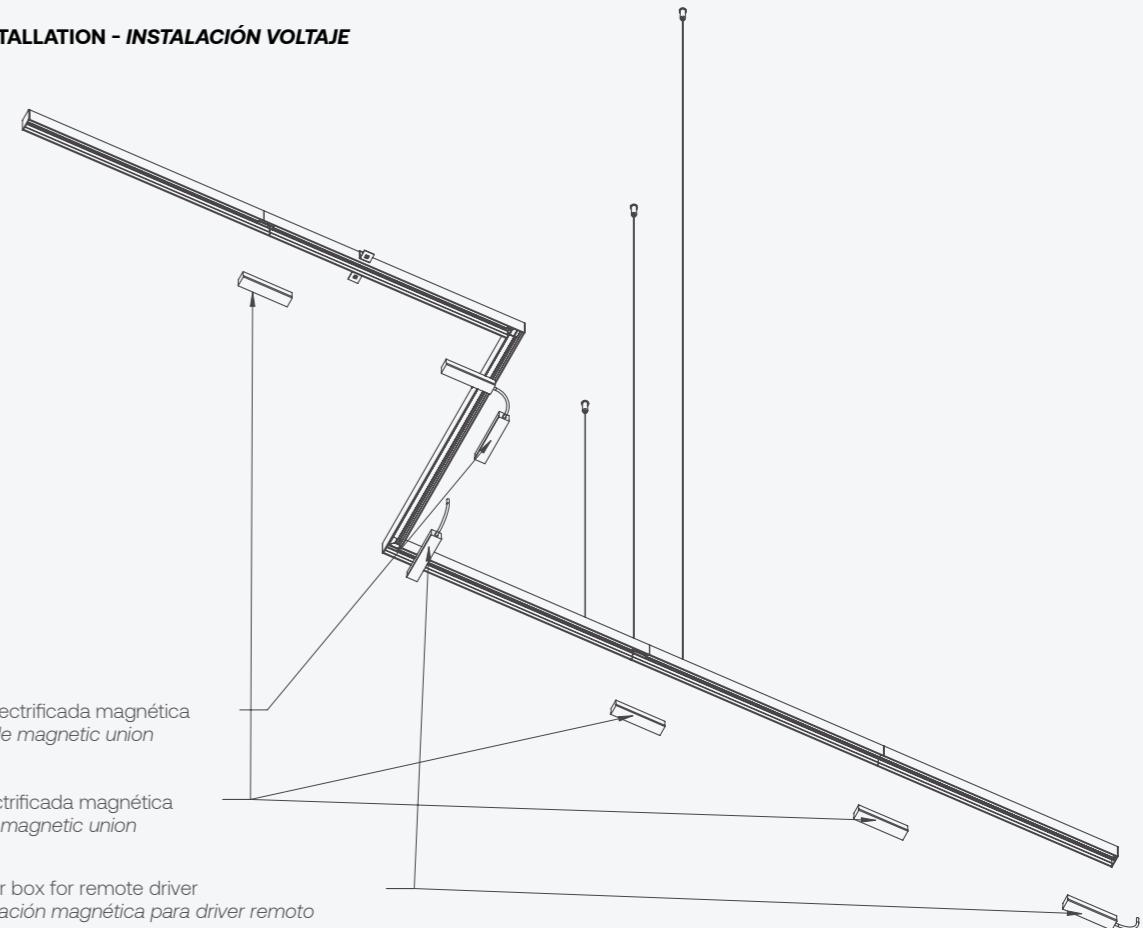


MECHANICAL INSTALLATION - INSTALACIÓN MECÁNICA

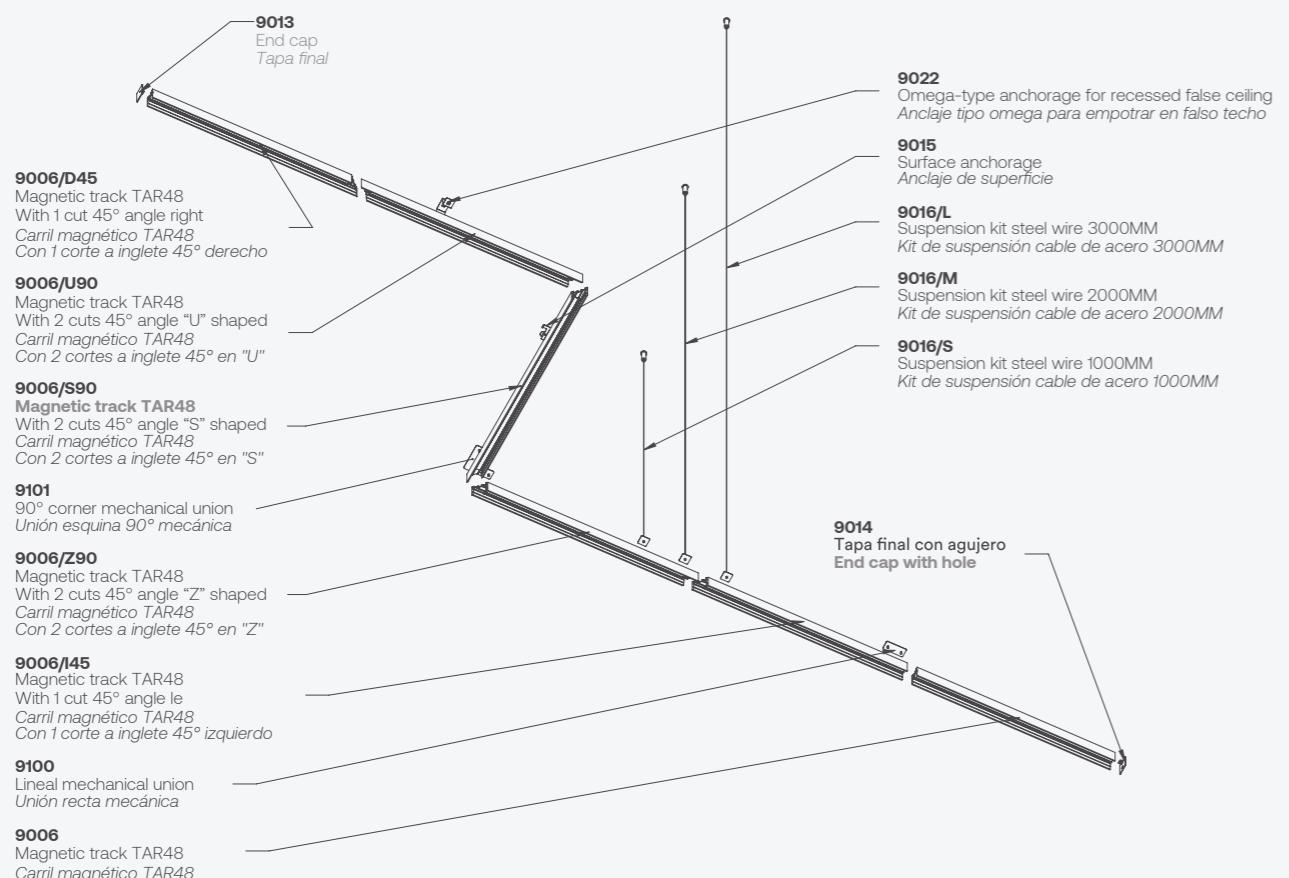


9006
Magnetic track built with aluminum profile.
Carril magnético construido en perfil de aluminio.

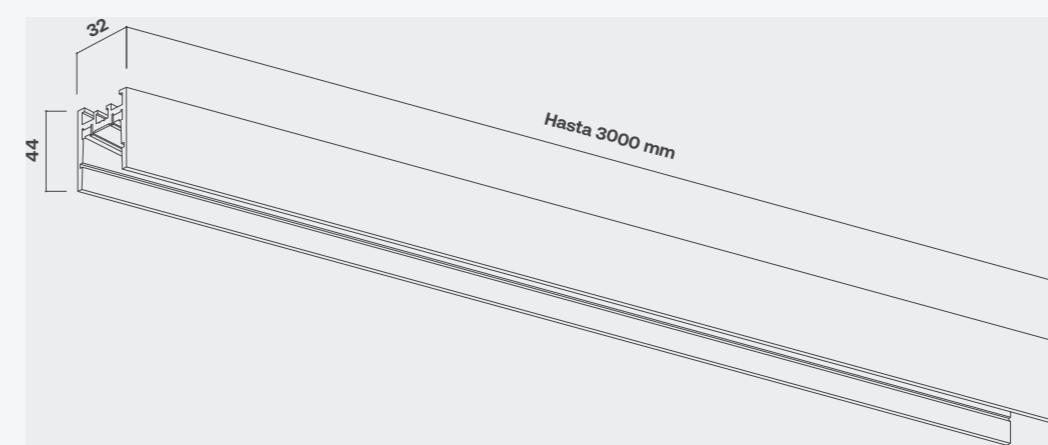


Three-phase Tracklight

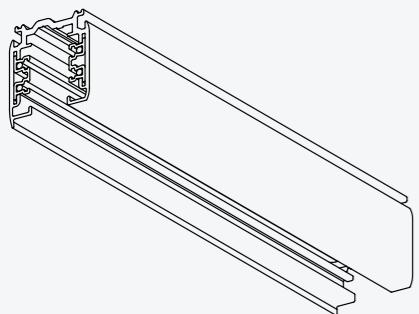

PC020
Three-phase track 1 m
Carril trifásico 1 m

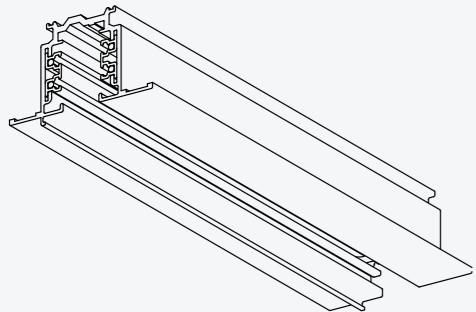


PC023
Recessed three-phase track 1 m
Carril trifásico de empotrar 1 m



PC021
Three-phase track 2 m
Carril trifásico 2 m

PC022
Three-phase track 3 m
Carril trifásico 3 m

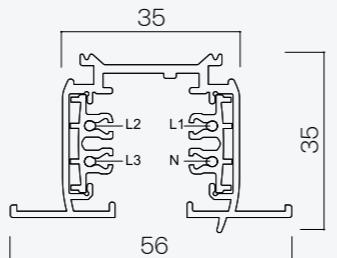


PC024
Recessed three-phase track 2 m
Carril trifásico de empotrar 2 m


PC025
Recessed three-phase track 3 m
Carril trifásico de empotrar 3 m




PC030
Right supply
Alimentación derecha




PC031
Left supply
Alimentación izquierda




PC032
Intermediate connection
Unión intermedia




PC033
90° right connection
Unión 90° derecha




PC034
90° left connection
Unión 90° izquierda




PC035
90° adjustable connection
Unión 90° ajustable




PC036
T connection type A
Unión en T tipo A




PC037
T connection type B
Unión en T tipo B




PC038
T connection type C
Unión en T tipo C



PC039
T connection type D
Unión en T tipo D



PC040
X-connection
Unión en X



PC041
End cap
Tapa final




PC042
Ceiling bracket
Soporte a techo



PC043
Suspension kit 1,5m
Kit de suspensión 1,5m

Track with protocol DALI, 1-10V, etc - please consult
Carril con protocolo DALI, 1-10V, etc, a consultar

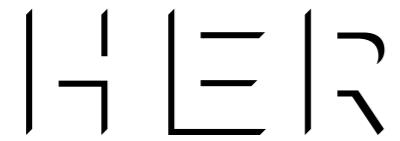The logo consists of the lowercase letters 'her' in a bold, sans-serif font. The 'h' is positioned on the left, the 'e' is in the center, and the 'r' is on the right. All three letters have vertical stems extending upwards from their top loops.

C/ Arquitecte Moragas, 20-22
08820 El Prat de Llobregat
Barcelona
+34 933 741 663
hello@herlighting.com

Showroom
Av. Josep Tarradellas 51-53
08029 Barcelona

